


DIMMER COMPATIBILITY CLASSIC A (FILAMENT)

BASIC INFORMATION:

1. WHAT IS THE PRODUCT CODE AND WHERE DO I FIND IT?

The product code describes the lamp type. It contains 7 letters and digits and is starting with "A". Below an example for the product code of the stamp of the lamp:

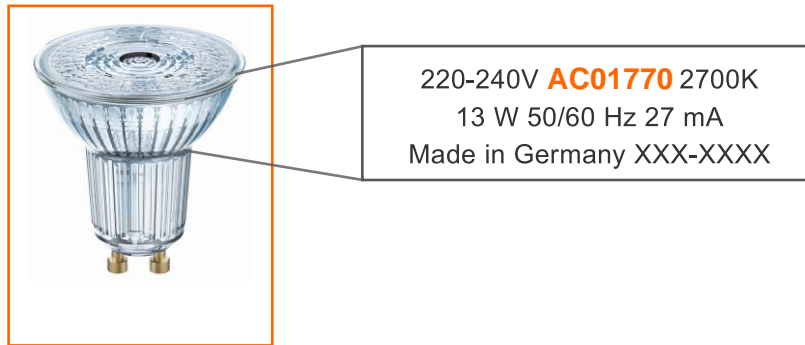

2. HOW CAN I READ THE FOLLOWING CHARTS?

Legend:
Information about the dimmability of the lamps. Green means very good dimmability, yellow means limited dimmability, red means undesired dimmability etc.

List of dimmers tested in laboratory conditions

Legend					SUPERSTAR PAR16 35 36°				SUPERSTAR PAR16 50 36°				SUPERSTAR PAR16 80 36°				SUPERSTAR PAR16 80 120°															
Very good dimmability with indicated number of lamps (dimming range greater than 75%)																																
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																																
Undesired dimmability																																
Not relevant																																
Not tested																																
EAN/Basic Code					4052839330153/AC01184				4052839330157/AC01152				4052839330174/AC01167				4052839330195/AC01134				4052839330232/AB41306				4058075036589/AC03043				4058075036582/AC03051			
Dimmer					Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range													
ABB	STD 50-3	230/50Hz	60-500	L	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	1-20	98% - 15%	2-20	97% - 12%	2-20	98% - 16%	2-20	98% - 16%												
Altenburger Electronic	50 30	230/50Hz	15-350	T	1-10	98% - 15%	2-10	97% - 12%	1-4	96% - 1%	1-4	96% - 1%	1-10	98% - 15%	2-10	97% - 12%	1-4	96% - 1%	1-4	96% - 1%												
ALPORA	DSP 400	230/50Hz	400	L	1-20	98% - 27%	1-20	98% - 26%	1-20	97% - 27%	1-20	97% - 27%	1-20	98% - 1%	2-9	98% - 1%	1-6	97% - 9%	1-6	97% - 9%												
Berker	2861	230/50Hz	50-420	U	1-15	98% - 1%	1-10	97% - 5%	1-6	94% - 7%	1-6	94% - 7%	1-15	98% - 1%	2-9	98% - 1%	1-6	97% - 9%	1-6	97% - 9%												
Blicino	L/NNT441N	230/50Hz			3-19	99% - 19%	2-12	97% - 19%	1-8	95% - 22%	1-8	95% - 22%	2-20	99% - 15%	2-20	98% - 17%	2-20	98% - 21%	2-20	98% - 21%												
Blicino	L/NNT4408	230/50Hz	60-420	T	1-10	96% - 22%	1-10	97% - 26%	1-10	97% - 26%	1-10	97% - 26%	1-10	96% - 22%	2-14	98% - 16%	1-9	97% - 15%	1-9	97% - 15%												
Blicino	NT4402N	230/50Hz	500	R	1-13	98% - 34%	1-10	97% - 35%	1-5	97% - 15%	1-5	97% - 15%	1-13	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%												
Busch-Jaeger	6513 U-102	230/50Hz	40-420	T	1-20	98% - 1%	1-10	98% - 5%	1-6	97% - 9%	1-6	97% - 9%	1-20	98% - 1%	1-10	98% - 5%	1-6	97% - 9%	1-6	97% - 9%												
Busch-Jaeger	6523 U-102	230/50Hz	420	T	1-11	98% - 1%	1-10	98% - 1%	1-5	99% - 7%	1-5	99% - 7%	1-11	98% - 1%	1-10	98% - 1%	1-5	99% - 7%	1-5	99% - 7%												
Busch-Jaeger	2250 U	230/50Hz	60-600	L	1-10	98% - 1%	1-10	98% - 1%	1-4	97% - 1%	1-4	97% - 1%	1-10	98% - 1%	1-10	98% - 1%	1-4	97% - 1%	1-4	97% - 1%												
Busch-Jaeger	6526 U	230/50Hz			2-20	98% - 6%	1-20	98% - 7%	1-20	97% - 10%	1-20	97% - 10%	2-20	98% - 1%	1-13	97% - 1%	1-8	96% - 1%	1-8	96% - 1%												
Busch-Jaeger	2247 U-500	230/50Hz	400	L	1-20	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%	1-20	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%												
Busch-Jaeger	6526 U	230/50Hz	60-600	L	1-10	96% - 22%	1-10	97% - 26%	1-10	97% - 26%	1-10	97% - 26%	1-10	96% - 22%	2-14	98% - 16%	1-9	97% - 15%	1-9	97% - 15%												
Busch-Jaeger	2247 U-500	230/50Hz	400	L	1-13	98% - 34%	1-10	97% - 35%	1-5	97% - 15%	1-5	97% - 15%	1-13	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%												
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	L	1-20	98% - 1%	1-10	98% - 5%	1-6	97% - 9%	1-6	97% - 9%	1-20	98% - 1%	1-10	98% - 5%	1-6	97% - 9%	1-6	97% - 9%												
DINUY	RE EL1LE1	230/50Hz	400	LED	1-11	98% - 1%	1-10	98% - 1%	1-5	99% - 7%	1-5	99% - 7%	1-11	98% - 1%	1-10	98% - 1%	1-5	99% - 7%	1-5	99% - 7%												
ELKO	400GLI	230/50Hz			1-10	98% - 1%	1-10	98% - 1%	1-4	97% - 1%	1-4	97% - 1%	1-10	98% - 1%	1-10	98% - 1%	1-4	97% - 1%	1-4	97% - 1%												
ELKO	315GLE	230/50Hz	20-315	T	2-20	98% - 6%	1-20	98% - 7%	1-20	97% - 10%	1-20	97% - 10%	2-20	98% - 6%	1-20	98% - 7%	1-20	97% - 10%	1-20	97% - 10%												
ELKO	600GLI	230/50Hz	40-600	U	1-20	98% - 1%	1-13	97% - 1%	1-8	96% - 1%	1-8	96% - 1%	1-20	98% - 1%	1-13	97% - 1%	1-8	96% - 1%	1-8	96% - 1%												
ELKO	420GLEI	230/50Hz	40-420	U	1-14	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%	1-14	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%												

Information about the OSRAM lamp type

Assessment of the results into categories. Includes the number of lamps and the related dimming range

DIMMER KOMPATIBILITÄT CLASSIC A (FILAMENT)

BASISINFORMATIONEN:

1. WAS IST DER PRODUKTCODE UND WO FINDE ICH IHN?

Der Produktcode beschreibt den Lampentyp. Er besteht aus sieben Buchstaben und Ziffern und beginnt mit einem "A". Nachfolgend ein Beispiel eines Produktcodes auf dem Aufdruck der Lampe.



220-240V **AC01770** 2700K
 13 W 50/60 Hz 27 mA
 Made in Germany XXX-XXXX

2. WIE LESE ICH DIE FOLGENDEN TABELLEN?

Legende: Angaben zur Dimmbarkeit der Lampen. Grün bedeutet eine sehr gute Dimmbarkeit mit der angegebenen Lampenanzahl, gelb bedeutet eine eingeschränkte Dimmbarkeit, rot bedeutet, dass unerwünschtes dimmverhalten auftreten kann etc.
















Liste der getesteten Dimmer

Legend					SUPERSTAR							
Very good dimmability with indicated number of lamps (dimming range greater than 75%)					PAR16 35 36*	PAR16 50 36*	PAR16 60 36*	PAR16 60 120*				
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)												
Undesired dimmability					EAN/ Basic Code	EAN/ Basic Code	EAN/ Basic Code	EAN/ Basic Code				
Not relevant					405283330133/AC01184	405283330171/AC01187	405283330210/AB41305	405807503668/AC03049				
Not tested					405283330157/AC01192	405283330199/AC01194	405283330232/AB41306	405807503632/AC03051				
Dimmer					Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range
ABB	STD 50-3	230V50Hz	60-500	L	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%
Altenburger Electronic	50 30	230V50Hz	15-350	T	2-20	98% - 15%	2-20	97% - 12%	2-20	98% - 16%	2-20	98% - 16%
AURORA	DSP 400	230V50Hz	400	L	1-10	98% - 15%	2-10	97% - 14%	1-4	96% - 1%	1-4	96% - 1%
Berker	2861	230V50Hz	50-420	U	1-20	98% - 27%	1-20	98% - 25%	1-20	97% - 27%	1-20	97% - 27%
Bicimo	LJNIT441N	230V50Hz			1-15	98% - 1%	1-10	97% - 5%	1-6	94% - 7%	1-6	94% - 7%
Bicimo	LJNIT4408	230V50Hz			2-20	98% - 1%	2-9	98% - 1%	1-6	97% - 3%	1-6	97% - 3%
Bicimo	NT4402N	230V50Hz	500	R	3-18	99% - 19%	2-12	97% - 19%	1-8	95% - 22%	1-8	95% - 22%
Busch-Jaeger	6513 U-102	230V50Hz	40-420	T	2-20	98% - 15%	2-20	98% - 17%	2-20	98% - 21%	2-20	98% - 21%
Busch-Jaeger	6523 U-102	230V50Hz	420	T	1-10	96% - 22%	1-10	97% - 26%				
Busch-Jaeger	2250 U	230V50Hz	60-600	L	1-10		2-14	98% - 16%	1-9	97% - 15%	1-9	97% - 15%
Busch-Jaeger	6526 U	230V50Hz			1-13	98% - 34%	1-10	97% - 35%	1-5		1-5	
Busch-Jaeger	2247 U-500	230V50Hz			1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%
CENTURY CONTROL	MULTI DIMMER	230V50Hz	60-600	L	2-13	98% - 1%	1-10	98% - 5%	1-6	97% - 9%	1-6	97% - 9%
DINJY	RE EL1LE1	230V50Hz	400	LED	1-11	98% - 1%	1-10	98% - 1%	1-5	99% - 7%	1-5	99% - 7%
ELKO	400GLI	230V50Hz			1-10		1-13		1-4	97% - 1%	1-4	97% - 1%
ELKO	316GLE	230V50Hz	20-315	T	2-20	98% - 6%	1-20	98% - 7%	1-20	97% - 10%	1-20	97% - 10%
ELKO	600GLI	230V50Hz	40-600	U	1-20	98% - 1%	1-13	97% - 1%	1-8	96% - 1%	1-8	96% - 1%
ELKO	420GLEI	230V50Hz	40-420	U	1-14	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%

Angaben zum OSRAM Lampentyp

Bewertung der Testergebnisse in Ampel Kategorien. Beinhaltet sowohl die Lampenanzahl als auch den dimmbaren Bereich
















DIMMER COMPATIBILITY CLASSIC A (FILAMENT)

Legend		SUPERSTAR PLUS CL A 60 Filament/GL FR		SUPERSTAR PLUS CL A 75 Filament/GL FR		SUPERSTAR PLUS CL A 100 Filament/GL FR		SUPERSTAR CL A 25 Filament/GL FR		SUPERSTAR CL A 40 Filament/GL FR		SUPERSTAR CL A 50 FIL Mirror Silver		SUPERSTAR CL A 60 Filament/GL FR		SUPERSTAR CL A 75 Filament/GL FR		SUPERSTAR CL A 100 Filament/GL FR		RETROFIT CL A 100 / Frosted		SUPERSTAR CL A 150 Frosted						
	Good dimmability with indicated number of lamps (dimming range greater than 75%)																											
	Limited dimmability with indicated number of lamps (dimming range smaller than 75%)	EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code						
	Undesired dimmability	EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code						
	Not tested	EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code						
		4058075602458 / AC45155 4058075602472 / AC45156 4058075602571 / AC45161 4058075602595 / AC45162		4058075602496 / AC45157 4058075602519 / AC45158 4058075602618 / AC45163 4058075602632 / AC45164		4058075602533 / AC45159 4058075602557 / AC45160 4058075602656 / AC45165 4058075602670 / AC45166 4058075602694 / AC45167 4058075602717 / AC45168		4058075211261 / AC44664 4058075211346 / AC44665		4058075434660 / AC32306 4058075211322 / AC32333 4058075054226 / AC32339		4058075132917 / AC45148		4058075434608 / AC44661 4058075434622 / AC44662 4058075448124 / AC44663		4058075434967 / AC45143 4058075435001 / AC45144 4058075448063 / AC45145 4058075436886 / AC32328 4058075112094 / AC32329		4058075434707 / AC41111 4058075245655 / AC41112 4058075245907 / AC41113 4058075245886 / AC41114 4058075448100 / AC41115		4058075245907 / AC45138 4058075245860 / AC45139		4058075437326 / AC32416						
Dimmer		Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps					
Brand	Model	Voltage range	Power	Type																								
2001	63533	230/50Hz	29,08	T			68-0%	68-0%	64-0%	61-0%																		
2007	63533	230/50Hz	24,08	T			63-0%	69-0%	66-0%	58-0%																		
ABB	STD 50-3	230/50Hz	60-500	L	97-0%	98-2%	99-25%	99-9%	100-24%	100-28%	98-2%	95-0%	77-0%	97-0%	89-0%	99-1%	97-16%	99-6%	99-25%	99-9%	96-0%	100-0%	100-24%	100-28%	100-14%	100-17%		
Altenburger	50,3	230/50Hz					95-29%	95-12%	98-15%	98-11%	59-0%	96-0%	95-0%	85-0%	89-0%				95-29%	95-12%	98-0%				98-15%	98-11%	98-22%	95-16%
AURORA	DSP 400	230/50Hz	400	L	96-0%	99-0%	97-0%	95-0%	100-0%	100-0%				74-0%	91-0%	89-0%	99-0%			100-0%	100-0%	100-30%			100-0%	100-0%	100-0%	100-0%
Berker	2861	230/50Hz	50-420	U			97-27%	96-24%	98-23%	99-8%	98-0%	98-0%	97-0%	85-0%				99-0%	98-0%	97-27%	96-24%	98-0%	99-16%	98-23%	99-8%	95-34%	98-31%	
Bticino	L/N/NT4411N	230/50Hz			80-0%	97-0%	97-0%	98-7%	100-0%	99-2%	100-0%	100-0%			79-0%	83-0%	100-0%	97-0%	97-0%	98-7%	98-10%	100-11%	100-0%	99-2%	99-9%	98-11%		
Bticino	L/N/NT4408	230/50Hz												87-0%												100-0%	99-0%	
Bticino	NT4402N	230/50Hz	500	R			97-30%	98-24%	98-28%	99-13%	95-0%			95-0%					97-30%	98-24%	98-26%	97-33%			98-28%	99-13%	73-15%	
Busch-Jaeger	6513 U-102	230/50Hz	420	T	96-0%	97-0%	99-44%	98-27%	99-34%	98-14%	100-0%	100-0%	98-0%	99-0%	94-0%	94-0%	100-0%	97-0%	99-44%	98-27%				99-34%	98-14%	99-27%	99-23%	
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	70-0%	92-0%	91-2%	99-16%	95-3%	100-9%	100-0%	100-0%	97-0%	98-0%	70-0%	73-0%	100-0%	97-0%	91-2%	99-16%				95-3%	100-9%	100-44%		
Busch-Jaeger	2250 U	230/50Hz	60-600	L			97-0%	99-0%	100-0%	100-0%	63-0%	86-0%			90-0%			97-0%	99-0%					100-0%	100-0%	100-0%	100-0%	
Busch-Jaeger	6526 U	230/50Hz											97-0%	79-0%									98-0%					
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	96-0%	99-0%	95-1%	99-0%	98-1%	100-3%	94-0%	89-0%	82-0%	98-0%	88-0%	99-0%	100-0%	99-0%	95-1%	99-0%	99-9%	99-10%	98-1%	100-3%	98-2%	100-5%		
DimMax	420 SL	230/50Hz	200	L/T	98-0%	97-0%	99-2%	100-0%	98-2%	99-2%	100-0%	93-0%	92-0%	84-0%	90-0%	94-0%	100-0%	99-0%	99-2%	100-0%	100-20%	97-16%	98-2%	99-2%	98-10%	100-10%		
DINUY	RE EL1 LE1	230/50Hz	400	LED	96-3%	95-3%	98-0%	98-0%	100-0%	100-0%	96-24%	95-23%	85-0%	85-0%	94-1%	98-1%	100-0%	99-0%	98-0%	98-0%	99-11%	99-5%	100-0%	100-0%	100-11%	99-10%		
ELKO	400GLI	230/50Hz					93-1%	98-0%	95-9%	99-3%	57-0%				69-0%	95-8%	100-0%	93-1%	98-0%	98-24%	99-17%	95-9%	99-3%	100-0%	100-0%	100-0%		
ELKO	315GLE	230/50Hz	20-315	T			97-3%	96-1%	98-3%	98-1%	100-21%	99-0%	92-0%	97-0%			100-0%	97-3%	96-1%				98-3%	98-1%	99-8%	98-7%		
ELKO	600GLE/I	230/50Hz			90-0%	91-0%	99-1%	100-23%	100-7%	100-21%	93-0%	86-0%		98-0%	84-0%	74-0%	100-0%	99-0%	99-1%	100-23%			100-18%	100-7%	100-21%	100-12%	100-14%	
ELKO	600GLI	230/50Hz	40-600	U	98-0%	95-0%	98-0%	99-4%	100-3%	100-4%	61-0%	97-0%	92-0%	91-0%	79-0%	79-0%	100-0%	99-0%	98-0%	99-4%	100-37%		100-3%	100-4%	100-12%	100-11%		
ELKO	420GLE/I	230/50Hz	40-420	U	85-0%		97-8%	100-6%	98-6%	100-6%	88-0%	86-0%	89-0%	98-0%	89-0%		80-0%	97-8%	100-6%	98-10%	100-11%	98-6%	100-6%	100-10%	100-10%	100-9%		
ELKO	1000LRI	230/50Hz			97-0%	99-0%	100-0%	100-0%	100-0%	99-0%	98-0%		96-0%	91-0%	88-0%	99-0%		100-0%	99-0%	98-0%	98-0%	100-0%	99-0%	100-0%	100-101%	100-101%		
ELKO	630GLE	230/50Hz	20-630	U	98-0%	74-0%	97-21%	96-9%	99-22%	97-9%			91-0%	95-0%	92-0%		99-2%	97-1%	97-21%	96-9%	98-2%	99-3%	99-22%	97-9%	99-29%	100-24%		
Eltako	EUD61NPN-UC	230/50Hz	5-400	R / L / C	96-0%	99-0%	96-5%	96-0%	99-3%	97-2%	100-0%	93-0%	85-0%	85-0%	94-0%	98-0%		100-0%	96-5%	96-0%	98-38%	98-42%	99-3%	97-2%	97-6%	97-5%		
Feller	40200.LEDxxx	230/50Hz			98-0%		96-7%	96-7%	98-18%	97-7%	99-0%	93-0%	98-0%	96-0%			100-0%	80-0%	96-7%	96-7%	98-26%	97-33%	98-18%	97-7%	96-26%	99-24%		
Feller	40600.RLC	230/50Hz	20-600	U	90-0%	91-0%	99-1%	100-23%	100-7%	100-21%	93-0%	86-0%		98-0%	84-0%	74-0%	100-0%	99-0%	99-1%	100-23%			100-20%	100-7%	100-21%	100-12%	100-14%	
Feller	40600.RC	230/50Hz			98-0%	74-0%	97-21%	96-9%	99-22%	97-9%			91-0%	95-0%	92-0%		99-2%	97-1%	97-21%	96-9%	97-11%	95-10%	99-22%	97-9%	99-29%	100-24%		
Feller	40600.RL	230/50Hz			98-0%	95-0%	98-0%	99-4%	100-3%	100-4%	61-0%	97-0%	92-0%	91-0%	79-0%	79-0%	100-0%	99-0%	98-0%	99-4%	98-10%	100-11%	100-3%	100-4%	100-12%	100-11%		
Feller	40420.RLC	230/50Hz			85-0%		97-8%	100-6%	98-6%	100-6%	88-0%	86-0%	89-0%	98-0%	89-0%		80-0%	97-8%	100-6%	98-10%	100-11%	98-6%	100-6%	100-10%	100-9%			
Feller	31000	230/50Hz			97-0%	99-0%	100-0%	100-0%	100-0%	99-0%	98-0%		96-0%	91-0%	88-0%	99-0%	98-0%	100-0%	100-0%	96-0%	100-0%	96-0%	100-0%	100-0%	100-101%	100-101%		
GIRA	226200	230/50Hz			88-0%	97-0%	95-1%	99-0%	97-4%	100-0%	81-0%	98-0%	85-0%	97-0%	80-0%	83-0%	100-0%	96-0%	95-1%	99-0%	97-4%	100-0%	98-0%	100-0%	100-0%	100-0%		
Gira	030700	230/50Hz	20-525	T	98-0%	99-0%	96-26%	96-16%	98-20%	98-15%	100-0%	99-0%	98-0%	96-0%	93-0%	94-0%	100-0%	100-0%	96-26%	96-16%	100-9%	100-8%	98-20%	98-15%	98-27%	98-22%		
Gira	117600	230/50Hz	50-420	U			98-15%	97-23%	98-23%	98-27%	96-0%		100-0%	97-0%			99-0%	98-15%	97-23%	99-9%	99-10%	98-23%	98-27%	98-33%	99-31%			
Gira	238500	230/50Hz					98-0%	96-0%	97-0%	99-0%			68-0%	99-0%	99-0%			98-0%	96-0%	100-25%	100-22%	97-0%	99-0%	99-5%	99-6%			
Gira	217400	230/50Hz	4X20-250	KNX-U	96-29%	98-23%	98-20%	98-12%	100-16%	100-14%			89-0%	81-0%	83-0%	93-0%	99-19%	98-0%	98-20%	98-12%	97-10%	97-10%	100-16%	100-14%	98-0%	98-0%		

DIMMER COMPATIBILITY CLASSIC A (FILAMENT)

Legend		SUPERSTAR PLUS CL A 60 Filament/GL FR		SUPERSTAR PLUS CL A 75 Filament/GL FR		SUPERSTAR PLUS CL A 100 Filament/GL FR		SUPERSTAR CL A 25 Filament/GL FR		SUPERSTAR CL A 40 Filament/GL FR		SUPERSTAR CL A 50 FIL Mirror Silver		SUPERSTAR CL A 60 Filament/GL FR		SUPERSTAR CL A 75 Filament/GL FR		SUPERSTAR CL A 100 Filament/GL FR		RETROFIT CL A 100 / Frosted		SUPERSTAR CL A 150 Frosted				
	Good dimmability with indicated number of lamps (dimming range greater than 75%)																									
	Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																									
	Undesired dimmability																									
	Not tested																									
		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code				
		4058075602458 / AC45155 4058075602472 / AC45156 4058075602571 / AC45161 4058075602595 / AC45162		4058075602496 / AC45157 4058075602519 / AC45158 4058075602618 / AC45163 4058075602632 / AC45164		4058075602533 / AC45159 4058075602557 / AC45160 4058075602656 / AC45165 4058075602670 / AC45166 4058075602694 / AC45167 4058075602717 / AC45168		4058075211261 / AC44664 4058075211346 / AC44665		4058075434660 / AC32306 4058075211322 / AC32333 4058075054226 / AC32339		4058075132917 / AC45148		4058075434608 / AC44661 4058075434622 / AC44662 4058075448124 / AC44663 4058075115958 / AC44666 4058075054240 / AC44667		4058075434967 / AC45143 4058075435001 / AC45144 4058075448063 / AC45145 4058075436388 / AC32328 4058075112094 / AC32329		4058075434707 / AC41111 4058075245655 / AC41112 4058075245907 / AC41113 4058075436860 / AC41114 4058075448100 / AC41115		4058075245907 / AC45138 4058075245860 / AC45139		4058075437326 / AC32416				
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps		
Brand	Model	Voltage range	Power	Type																						
Hager	WUD87	230/50Hz	400	LED-U	85-0%	63-0%	91-24%	94-15%	92-19%	98-6%	93-0%	88-0%	77-0%	82-0%	89-0%	97-0%	100-0%	91-24%	94-15%	98-7%	98-6%	92-19%	98-6%	97-23%	96-18%	
Hamilton	KP1X40	230/50Hz	400		98-98%										92-0%					98-0%	99-0%					
Hugo Müller	paladin 872110 led	230/50Hz			96-3%	95-3%	98-0%	98-0%	100-0%	100-0%	96-24%	95-23%			94-1%	98-1%	100-0%	99-0%	98-0%	98-0%	97-1%	97-4%	100-0%	100-0%	100-11%	99-10%
Jung	225 NVDE	230/50Hz	20-500	L	88-0%	97-0%	95-1%	99-0%	97-4%	100-0%	81-0%	98-0%	85-0%	97-0%	80-0%	83-0%	100-0%	96-0%	95-1%	99-0%	100-38%		97-4%	100-0%	98-0%	100-0%
Jung	225 TDE	230/50Hz			98-0%	99-0%	96-26%	96-16%	98-20%	98-15%	100-0%	99-0%	98-0%	96-0%	93-0%	94-0%	100-0%	100-0%	96-26%	96-16%	98-8%	98-7%	98-20%	98-15%	98-27%	98-22%
Jung	254 UDIE1	230/50Hz					98-15%	97-23%	98-23%	98-27%	96-0%		100-0%	97-0%			99-0%	98-15%	97-23%	98-0%	99-0%	98-23%	98-27%	98-33%	99-31%	
Jung	1224 LEDUDE	230/50Hz		LED			98-0%	96-0%	97-0%	99-0%		68-0%	99-0%	99-0%			98-0%	96-0%	98-2%	99-3%	97-0%	99-0%	99-5%	99-6%		
Jung	3904 REGHE	230/50Hz			96-29%	98-23%	98-20%	98-12%	100-16%	100-14%		89-0%			93-0%	99-19%		98-0%	98-20%	98-12%	98-15%	100-10%	100-16%	100-14%	98-0%	
Legrand	665114	230/50Hz	400	U	80-0%	97-0%	97-0%	98-7%	100-0%	99-2%	100-0%	100-0%			79-0%	83-0%	100-0%	97-0%	97-0%	98-7%	100-0%	100-0%	100-0%	99-2%	99-9%	98-11%
Legrand	574319/574339	230/50Hz	400	U	80-0%	97-0%	97-0%	98-7%	100-0%	99-2%	100-0%	100-0%			79-0%	83-0%	100-0%	97-0%	97-0%	98-7%	100-38%	100-19%	100-0%	99-2%	99-9%	98-11%
Legrand	572239/572739	230/50Hz	400	U	80-0%	97-0%	97-0%	98-7%	100-0%	99-2%	100-0%	100-0%			79-0%	83-0%	100-0%	97-0%	97-0%	98-7%	98-0%	98-0%	100-0%	99-2%	99-9%	98-11%
Legrand	078407/079207	230/50Hz	400	U	80-0%	97-0%	97-0%	98-7%	100-0%	99-2%	100-0%	100-0%			79-0%	83-0%	100-0%	97-0%	97-0%	98-7%	98-33%	97-33%	100-0%	99-2%	99-9%	98-11%
Legrand	048869/048871	230/50Hz	400	U	80-0%	97-0%	97-0%	98-7%	100-0%	99-2%	100-0%	100-0%			79-0%	83-0%	100-0%	97-0%	97-0%	98-7%		100-20%	100-0%	99-2%	99-9%	98-11%
Legrand	067083/048869	230/50Hz	400	U	80-0%	97-0%	97-0%	98-7%	100-0%	99-2%	100-0%	100-0%			79-0%	83-0%	100-0%	97-0%	97-0%	98-7%		100-0%	100-0%	99-2%	99-9%	98-11%
Legrand	770061	230/50Hz	400	RL									82-0%							98-8%	98-7%					
Legrand	099314	230/50Hz	300	RL			95-0%	95-0%	99-0%	99-0%		96-0%	74-0%	85-0%				95-0%	95-0%	99-0%	98-0%	99-0%	99-0%	98-5%		
Legrand	770062	230/50Hz	400	RLC	98-0%	99-0%	95-0%	95-0%	97-2%	97-2%	97-0%	89-0%			75-0%	87-0%				98-0%	100-0%			100-0%	99-0%	
Legrand	078405	230/50Hz	600	RL																96-0%	100-0%			100-0%	99-0%	
MASTER	DM-DGL	230/50Hz	1000	U / LED	97-37%						99-17%		77-0%	85-0%							98-0%	98-0%				
MASTER	DM-2500	230/50Hz	2500	U / LED	96-0%	97-0%	98-0%	99-0%	100-0%	100-0%	99-0%		74-0%	83-0%	89-0%	100-0%	97-0%	100-0%	100-0%	98-0%	99-0%	100-20%	99-18%	100-0%	100-0%	100-0%
Merten	MEGS136-0000	230/50Hz					97-3%	96-1%	98-3%	98-1%	100-21%	99-0%		97-0%						98-26%	97-33%	98-3%	98-1%	99-8%	98-7%	
Merten	MEGS134-0000	230/50Hz			98-0%		96-7%	96-7%	98-18%	97-7%	99-0%	93-0%	98-0%	96-0%			100-0%	80-0%	96-7%	96-7%		100-20%	98-18%	97-7%	96-26%	99-24%
Merten	MEGS139-0000	230/50Hz			90-0%	91-0%	99-1%	100-23%	100-7%	100-21%	93-0%	86-0%		98-0%	84-0%	74-0%	100-0%	99-0%	99-1%	100-23%	99-9%	99-10%	100-7%	100-21%	100-12%	100-14%
Merten	MEGS137-0000	230/50Hz			98-0%	74-0%	97-21%	96-9%	99-22%	97-9%		91-0%	95-0%	92-0%			99-2%	97-1%	97-21%	96-9%	100-37%		99-22%	97-9%	99-29%	100-24%
Merten	MEGS133-0000	230/50Hz			98-0%	95-0%	98-0%	99-4%	100-3%	100-4%	61-0%	97-0%	92-0%	91-0%	79-0%	79-0%	100-0%	99-0%	98-0%	99-4%	99-16%	100-3%	100-4%	100-12%	100-11%	
Merten	MEGS138-0000	230/50Hz			85-0%		97-8%	100-6%	98-6%	100-6%	88-0%	86-0%	89-0%	98-0%	89-0%	80-0%		97-8%	100-6%	98-10%	100-11%	98-6%	100-6%	100-10%	100-9%	
Merten	MEG 5170-0300	230/50Hz	10-200	U			83-28%	77-22%	80-0%	76-21%	96-11%	95-0%	65-0%	85-0%	89-0%		98-0%	99-0%	83-28%	77-22%	98-0%	98-0%	80-0%	76-21%	91-34%	88-31%
Merten	MEG 5131	230/50Hz	40-400	L	91-0%	90-0%	99-0%	99-0%	100-0%	100-0%	82-0%	86-0%	63-0%	83-0%	69-0%	74-0%	100-0%	99-0%	99-0%	98-8%	96-8%	100-0%	100-0%	100-0%	100-0%	
Merten	MEG 5132	230/50Hz			91-0%	90-0%	99-0%	99-0%	100-0%	100-0%	82-0%	86-0%	63-0%	83-0%	69-0%	74-0%	100-0%	100-0%	99-0%	99-0%	98-8%	97-33%	100-0%	100-0%	100-0%	
Merten	MEG 5140	230/50Hz	9-100	L	91-0%	96-0%	91-0%	98-0%	96-0%	99-0%	95-0%	88-0%	58-0%	82-0%	69-0%	78-0%	100-0%	100-0%	91-0%	98-0%		100-18%	96-0%	99-0%	88-0%	99-0%
Merten	MEG 5135	230/50Hz	60-1000	L	97-0%	99-0%	100-0%	100-0%	100-0%	99-0%	98-0%		96-0%	91-0%	88-0%	99-0%	98-0%		100-0%	100-0%	99-9%	99-10%	100-0%	99-0%	100-101%	
MK	K4501	230/50Hz	180	L	97-0%	99-0%	90-2%	98-6%	94-10%	99-12%	98-0%	96-0%		99-0%	94-0%	99-0%	98-0%	98-0%	90-2%	98-6%		100-18%	94-10%	99-12%	100-11%	100-13%
NEXUS	881P-01	230/50Hz	400	L	96-0%	98-0%	97-0%	97-0%	100-0%	100-0%		84-0%	69-0%	88-0%	83-0%	96-0%	99-0%	97-0%	97-0%	100-30%		100-0%	100-0%	98-0%	99-0%	
NIKO	310-0190001901	230/50Hz	5-200	U	96-0%	97-0%	99-0%	99-0%	100-3%	100-2%	100-0%	90-0%	85-0%	85-0%	95-0%	99-0%		98-0%	99-0%	99-0%	97-8%	99-8%	100-3%	100-2%	100-5%	100-5%
NIKO	330-0070000701	230/50Hz	5-200	U	96-4%	98-5%	99-7%	98-6%	100-11%	100-11%	100-0%	89-0%	65-0%	85-0%	94-0%	100-2%	100-0%	98-0%	99-7%	98-6%		100-11%	100-11%	100-15%	100-14%	

DIMMER COMPATIBILITY CLASSIC A (FILAMENT)

Legend					SUPERSTAR PLUS CL A 60 Filament/GL FR	SUPERSTAR PLUS CL A 75 Filament/GL FR	SUPERSTAR PLUS CL A 100 Filament/GL FR	SUPERSTAR CL A 25 Filament/GL FR	SUPERSTAR CL A 40 Filament/GL FR	SUPERSTAR CL A 50 FIL Mirror Silver	SUPERSTAR CL A 60 Filament/GL FR	SUPERSTAR CL A 75 Filament/GL FR	SUPERSTAR CL A 100 Filament/GL FR	RETROFIT CL A 100 / Frosted	SUPERSTAR CL A 150 Frosted											
	Good dimmability with indicated number of lamps (dimming range greater than 75%)																									
	Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																									
	Undesired dimmability																									
	Not tested																									
					EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code											
					4058075602458 / AC45155 4058075602472 / AC45156 4058075602571 / AC45161 4058075602595 / AC45162	4058075602496 / AC45157 4058075602519 / AC45158 4058075602618 / AC45163 4058075602632 / AC45164	4058075602533 / AC45159 4058075602557 / AC45160 4058075602656 / AC45165 4058075602670 / AC45166 4058075602694 / AC45167 4058075602717 / AC45168	4058075211261 / AC44664 4058075211346 / AC44665	4058075434660 / AC32306 4058075211322 / AC32333 4058075054226 / AC32339	4058075132917 / AC45148	4058075434608 / AC44661 4058075434622 / AC44662 4058075448124 / AC44663 4058075115958 / AC44666 4058075054240 / AC44667	4058075434967 / AC45143 4058075435001 / AC45144 4058075448063 / AC45145 4058075438388 / AC32328 4058075112094 / AC32329	4058075434707 / AC41111 4058075245655 / AC41112 4058075245907 / AC41113 4058075458860 / AC41114 4058075448100 / AC41115	4058075245907 / AC45138 4058075245860 / AC45139	4058075437326 / AC32416											
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps				
Brand	Model	Voltage range	Power	Type																						
Odace	S520512	230/50Hz			98-0%		96-7%	96-7%	98-18%	97-7%	99-0%	93-0%	98-0%	96-0%		100-0%	80-0%	96-7%	96-7%	100-30%		98-18%	97-7%	96-26%	99-24%	
Odace	S520511	230/50Hz			98-0%	95-0%	98-0%	99-4%	100-3%	100-4%	61-0%	97-0%	92-0%	91-0%	79-0%	79-0%	100-0%	99-0%	98-0%	99-4%	98-10%	100-11%	100-3%	100-4%	100-12%	100-11%
Odace	S520515	230/50Hz			85-0%		97-8%	100-6%	98-6%	100-6%	88-0%	86-0%	89-0%	98-0%	89-0%	80-0%		97-8%	100-6%			98-6%	100-6%	100-10%	100-9%	
Odace	S520518	230/50Hz			91-0%	96-0%	91-0%	98-0%	98-0%	99-0%	95-0%	88-0%	82-0%	92-0%	69-0%	78-0%	100-0%	91-0%	98-0%		90-35%	87-33%	96-0%	99-0%	88-0%	99-0%
Osram	HTI DALI 315 DIM	230/50Hz	20-315	DALI-T	98-0%	99-0%	99-9%	98-0%	100-7%	100-6%	100-0%	99-0%		100-0%	95-0%	94-0%		99-9%	99-8%		100-18%	100-7%	100-6%	100-17%	100-16%	
PEHA	435 HAN	230/50Hz	60-600	L	86-0%	94-0%	76-5%	96-6%	93-4%	98-5%		88-0%		81-0%	64-0%	79-0%	100-0%	100-0%	76-5%	96-6%		100-20%	93-4%	98-5%	98-18%	100-18%
Schneider	400GLI	230/50Hz	40-400	T			93-1%	98-0%	95-9%	99-3%	57-0%	53-0%				69-0%	95-8%	100-0%	93-1%	98-0%	100-10%		95-9%	99-3%	100-0%	100-0%
Schneider	SBD315RC	230/50Hz					97-3%	96-1%	98-3%	98-1%	100-21%	99-0%		97-0%			100-0%	100-0%	97-3%	96-1%	98-8%	96-8%	98-3%	98-1%	99-8%	98-7%
Schneider	SBD200LED	230/50Hz	400		98-0%		96-7%	96-7%	98-18%	97-7%	99-0%	93-0%	98-0%	96-0%		100-0%	80-0%	96-7%	96-7%	99-0%	99-0%	98-18%	97-7%	96-26%	99-24%	
Schneider	SBD600RCRL	230/50Hz			90-0%	91-0%	96-1%	100-23%	100-7%	100-21%	93-0%	86-0%		98-0%	84-0%	74-0%	100-0%	99-0%	99-1%	100-23%	99-0%	99-0%	100-7%	100-21%	100-12%	100-14%
Schneider	SBD630RC	230/50Hz			98-0%	74-0%	97-21%	96-9%	99-22%	97-9%		91-0%	95-0%	92-0%		99-2%	97-1%	97-21%	96-9%	100-25%	100-22%	99-22%	97-9%	99-29%	100-24%	
Schneider	SBD600RL	230/50Hz			98-0%	95-0%	98-0%	99-4%	100-3%	100-4%	61-0%	97-0%	92-0%	91-0%	79-0%	79-0%	99-0%	98-0%	99-4%	97-11%	95-10%	100-3%	100-4%	100-12%	100-11%	
Schneider	SBD420RCRL	230/50Hz			85-0%		97-8%	100-6%	98-6%	100-6%	88-0%	86-0%	89-0%	98-0%	89-0%		80-0%		97-8%	100-6%	98-10%	100-11%	98-6%	100-6%	100-10%	100-9%
Schneider	5170	230/50Hz					83-28%	77-22%	80-0%	76-21%	96-11%	95-0%	65-0%	85-0%	89-0%		98-0%	99-0%	83-28%	77-22%	98-92%		80-0%	76-21%	91-34%	88-31%
Schneider	SBD400RL	230/50Hz			91-0%	90-0%	99-0%	99-0%	100-0%	100-0%	82-0%	86-0%	63-0%	83-0%	69-0%	74-0%	100-0%	100-0%	99-0%	99-0%	100-30%		100-0%	100-0%	100-0%	99-0%
Schneider	SBDSP	230/50Hz			91-0%	96-0%	91-0%	98-0%	96-0%	99-0%	95-0%	88-0%	58-0%	82-0%	69-0%	78-0%	100-0%	91-0%	98-0%	99-9%	99-10%	96-0%	99-0%	88-0%	99-0%	
Schneider	ATTD1000RL	230/50Hz			97-0%	99-0%	100-0%	100-0%	100-0%	99-0%	98-0%		96-0%	91-0%	88-0%	99-0%	98-0%	100-0%	100-0%	90-35%	87-33%	100-0%	99-0%	100-101%	100-101%	
Shuttle	SDIM-T-LED-500W	230/50Hz	2-500	T & LED-T	97-0%	64-0%	99-3%	98-5%	98-4%	98-3%	97-12%	92-8%	86-0%	92-0%	89-0%	99-0%		99-3%	98-5%		100-20%	98-4%	98-3%	98-12%	96-13%	
Siemens	5TC8 284	230/50Hz	20-525	T	74-2%	73-0%	97-25%	96-6%	100-18%	97-4%	100-20%	100-0%			64-0%	57-0%	100-0%	100-0%	97-25%	96-6%	96-7%	98-8%	100-18%	97-4%	99-15%	98-11%
Siemens	SWG1-527-1AB31	230/50Hz	20-500	KNX-U			99-2%	99-0%	100-0%	100-0%	97-0%	93-0%	85-0%	85-0%				99-2%	99-0%			100-0%	100-0%			
theben	DIMAX 544 plus P	230/50Hz	250	T			99-17%	100-16%	100-19%	100-18%	100-0%	100-0%	93-0%	95-0%		99-0%	98-0%	99-17%	100-16%			100-19%	100-18%	100-23%	100-22%	
theben	DIMAX 534 plus	230/50Hz	400	T	97-0%	99-0%	99-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	89-0%	99-0%	97-0%	99-0%	99-0%			100-0%	100-0%	97-2%	97-4%	
VADSBO	LD 220	230/50Hz	1-200	U	96-0%				99-0%	100-47%	97-0%	98-0%		83-0%	89-0%	90-0%	99-0%	98-28%				100-18%	100-47%	97-0%		
VARILIGHT	HQ3W	230/50Hz	400		96-2%	98-3%	97-14%	96-13%	99-12%	98-16%	100-0%	80-0%	65-0%	91-0%	93-1%	99-1%	95-11%		97-14%	96-13%	98-6%	99-6%	99-12%	98-16%	98-8%	
VARILIGHT	JQP401W	230/50Hz	400	T			97-43%	98-41%	98-40%	99-46%	95-26%	100-18%	97-0%	99-0%		100-22%	100-20%	97-43%	98-41%	99-4%	98-4%	98-40%	99-46%	99-9%	100-9%	
Vimar	20135	230/50Hz	3 - 100	U	97-0%	98-0%					99-0%	92-0%	58-0%	74-0%	93-0%	99-0%	97-0%	98-0%							100-9%	99-9%
ZANO	WH401	230/50Hz	400	L				98-35%	97-45%	100-0%	65-0%	97-0%		99-0%		100-0%	98-0%			98-35%	97-15%	99-13%	97-45%	100-0%	100-0%	
ZANO	WH251	230/50Hz	250			97-0%		100-0%	97-0%	100-0%		93-5%	85-0%	97-0%		99-0%	100-0%	97-0%			96-0%	100-0%	100-0%	100-0%	100-0%	
ZANO	Z GRID 700	230/50Hz	250	LED	92-0%	98-0%	96-0%	99-0%			83-0%	82-0%					96-0%	99-0%		97-16%	99-15%	98-16%	100-16%			
ZANO	Z GRID 600	230/50Hz	250	T							82-0%	90-0%	98-0%	95-0%	87-0%	98-0%	100-0%	0-0%								
ZANO	Z GRID 500	230/50Hz	500		91-0%	98-0%	98-0%	97-0%	100-0%	100-0%		90-0%	98-0%	98-0%	81-0%	94-0%				98-8%	96-8%	100-0%	100-0%	99-0%	100-0%	

Please Note:

- The compatibility list is based upon testing conducted by the manufacturer in a lab simulated environment, and the results can vary in certain field applications due to a number of factors. OSRAM does not take over any responsibility, warranty or liability that this results can also achieved by using the devices under other conditions, or when using successor models of the tested devices, or different models of the same manufacturer, or when using other LED lamp types
- The absence of a dimmer from this chart does not necessarily imply incompatibility.
- Please reference the dimmer manufacturer's instructions for installation.
- LED lamps contain several electronic components. Under unfavourable conditions these can lead to acoustic noise. In case of resonance even low noise can cause audible effect. Possible factors influencing this are the installation, the design of the lamp holder and the luminaire (acoustic resonance effect) as well as the dimmer or the transformer (harmonics or electronic resonance).
- Subject to change without notice
- Errors and omission excepted
- Always make sure to use the most recent release

Application Notes:

- For best dimming results trailing edge dimmer type is recommended.
- Trailing edge type dimmer requires the neutral wire for installation.

Bitte beachten:

- Die Kompatibilitätsliste basiert auf Tests, die der Hersteller in einer im Labor simulierten Umgebung durchgeführt hat. Die Ergebnisse können aufgrund verschiedener Faktoren in manchen Praxisanwendungen abweichen. OSRAM übernimmt keinerlei Verantwortung, Garantie oder Haftung dafür, dass diese Ergebnisse tatsächlich mit den Geräten unter anderen Bedingungen, mit Nachfolgemodellen der getesteten Geräte, mit anderen Modellen desselben Herstellers oder bei Verwendung anderer LED-Lampentypen erreicht werden.
- Das Fehlen eines Dimmers in der Abbildung bedeutet nicht, dass ein Dimmer nicht kompatibel ist.
- Lesen Sie stets die Installationsanweisungen des Dimmerherstellers.
- LED-Lampen bestehen aus mehreren elektronischen Komponenten. Unter ungünstigen Bedingungen können diese Störgeräusche erzeugen. Im Resonanzfall können selbst geringe Geräusche einen hörbaren Effekt hervorrufen. Einflussfaktoren können die Installation, die Gestaltung des Lampenträgers, die Leuchte (akustischer Resonanzeffekt), der Dimmer oder der Trafo (Oberschwingungen oder elektronische Resonanz) sein.
- Änderungen vorbehalten.
- Irrtümer und Auslassungen vorbehalten.
- Vergewissern Sie sich, dass Sie stets die aktuellste Version benutzen.

Anwendungshinweis:

- Um bestmögliche Dimmergebnisse zu erzielen, wird die Verwendung von Phasenabschnitt-Dimmern empfohlen.
- Phasenabschnitt-Dimmer erfordern bei der Installation einen Neutralleiter.

LEDVANCE GmbH

Head Office:

Parkring 33
85748 Garching, Germany
Phone +49 89 780673-100
Fax +49 89 780673-XXX
www.ledvance.com