

LEDVANCE POWER THROUGH LIGHT A STRONG PARTNER IN THE LIGHTING INDUSTRY LEDVANCE is a prominent player in the lighting industry, known for its innovative lighting products and smart, interconnected lighting solutions. Drawing from our comprehensive understanding of the general illumination market, current technologies, and evolving customer demands, we are committed to meeting the specific needs of both direct and indirect customers. As a reliable local partner, we take an active role in supporting your efforts to impress customers with high-quality, long-lasting lighting concepts. Our aim is to help boost your lighting sales by offering attractive, user-friendly, and intelligent products. Together, we can collaboratively shape the future of light – with agility, courage, speed, and flexibility. Join us on this journey as we pave the way towards a brighter tomorrow.

OUR STRENGTHS ARE YOUR ADVANTAGE



COOPERATIVE

As a dedicated and collaborative partner, LEDVANCE boasts a vast, worldwide sales team and over a century of experience, ensuring we stand by your side at all times.



VERSATILE

Modern, smart, decorative, functional, robust and practical – our extensive portfolio meets customer requirements in all categories and virtually every area of application.



SALES-BOOSTING

Attract attention, encourage purchases. We offer targeted support for your sales with creative, pre-tested marketing concepts.



CARING

We are committed to contributing to a greener planet by reducing CO_2 emissions and waste through sustainable products, solutions and processes. We empower our customers to use light more efficiently to save energy and reduce their environmental footprint.



UNIQUE

Fresh, dynamic, high-quality and bold – we know at an early stage what interests customers and where lighting trends are heading. LEDVANCE is unmistakably LEDVANCE.



INNOVATION MEETS TRADITION

We embody progress and the passion to shape the future of lighting actively. By blending our courage to explore new paths with our experience from more than 100 years of lighting expertise, we lead the way forward.



ALL IN ONE


At LEDVANCE, we've got everything you need from a single source – LED luminaires, lamps, and Smart Home products. We offer you a wide range of innovative and market-driven solutions, setting new trends along the way.



FIRST-CHOICE PARTNER

As the perfect strategic ally, we offer an extensive portfolio, a robust sales network, and unparalleled global market access to fulfill all your requirements.

GLOBAL PRESENCE

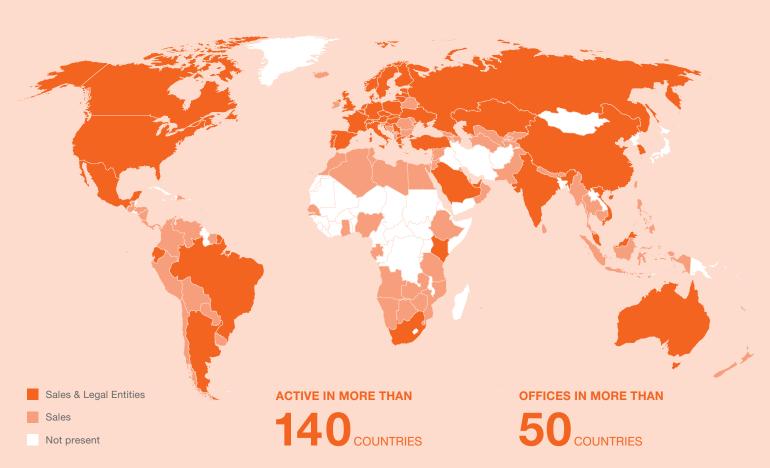

CONTENT

LEDVANCE POWER THROUGH LIGHT	2	– SOLAR FLOOR LUMINAIR
		ENDURA® STYLE SOLAR
PRODUCTS SOLAR LUMINAIRES		- SOLAR FLOODLIGHTS
SMART ⁺ SOLAR LUMINAIRES	10	ENDURA® GARDEN SOLA WALL & SPIKE
- SMART ⁺ SOLAR TABLE LUMINAIRES	10	ENDURA® FLOOD BUTTER
SMART ⁺ BLUETOOTH TABLE FRAME SOLAR	10	ENDURA® FLOOD SOLAR
SMART ⁺ BLUETOOTH TABLE LANTERN SOLAR	12	ENDURA® FLOOD SOLAR
- SMART ⁺ SOLAR WALL & BOLLARD LUMINAIRES	6 14	HYBRID LUMINAIRES
SMART ⁺ BLUETOOTH SOLAR ALPS	14	HYBRID ENERGY SUPPLY
- SMART ⁺ SOLAR SPIKE LUMINAIRES SMART ⁺ BLUETOOTH SPOT & BOLLARD WITH	16	ENDURA® HYBRID ELECT MATERIAL
INDEPENDENT SOLAR PANEL	16	HYBRID BOLLARD LUMINA
SMART ⁺ BLUETOOTH SOLAR PATH LIGHT	18	ENDURA® HYBRID DALLA
SMART ⁺ BLUETOOTH SOLAR SPOT LIGHT	20	ENDURA® HYBRID VENUS
SOLAR LUMINAIRES	22	ENDURA® HYBRID OLONA
- SOLAR WALL & BOLLARD LUMINAIRES	22	ENDURA® HYBRID RONDO
ENDURA® STYLE SOLAR BOUQUET	22	ENDURA® HYBRID MARI
ENDURA® STYLE SOLAR DOUBLE CIRCLE	24	ENDURA® HYBRID ORION
- SOLAR WALL LUMINAIRES	26	ENDURA® HYBRID HAGEN
ENDURA® STYLE SOLAR QUADRO	26	HYBRID SPIKE LUMINAIRES
ENDURA® STYLE SOLAR OXFORD	28	ENDURA® HYBRID NAUT
ENDURA® STYLE SOLAR BRICKLUME	30	ENDURA® HYBRID SPOT
ENDURA® STYLE SOLAR SENSOR SINGLE		ENDURA® HYBRID ROTA S
CIRCLE ENDURA® STYLE SOLAR GLOW PIR SENSOR	32 34	HYBRID FLOOR LUMINAIRE
ENDURA® STYLE SOLAR GLOW PIR SENSOR ENDURA® STYLE SOLAR OVAL/OVAL S	36	ENDURA® HYBRID INGRO
		HYBRID BALL LUMINAIRE
ENDURA® STYLE SOLAR LUNAR	38	ENDURA® HYBRID BALL
ENDURA® STYLE SOLAR TOSSA	40	

- SOLAR FLOOR LUMINAIRES	42
ENDURA® STYLE SOLAR UTILI	42
- SOLAR FLOODLIGHTS	44
ENDURA® GARDEN SOLAR SPOT	
WALL & SPIKE	44
ENDURA® FLOOD BUTTERFLY SOLAR	46
ENDURA® FLOOD SOLAR DOUBLE SENSOR	48
ENDURA® FLOOD SOLAR	50
HYBRID LUMINAIRES	52
HYBRID ENERGY SUPPLY	56
ENDURA® HYBRID ELECTRIFICATION MATERIAL	56
HYBRID BOLLARD LUMINAIRES	58
ENDURA® HYBRID DALLAS	58
ENDURA® HYBRID VENUS	60
ENDURA® HYBRID OLONA	62
ENDURA® HYBRID RONDO	64
ENDURA® HYBRID MARI	66
ENDURA® HYBRID ORION	68
ENDURA® HYBRID HAGEN	70
HYBRID SPIKE LUMINAIRES	72
ENDURA® HYBRID NAUT SPIKE	72
ENDURA® HYBRID SPOT SPIKE	74
ENDURA® HYBRID ROTA SPIKE	76
HYBRID FLOOR LUMINAIRE	78
ENDURA® HYBRID INGROUND SPIKE	78
HYBRID BALL LUMINAIRE	80
ENDURA® HYBRID BALL	80

SMART ⁺ LUMINAIRES	82
SMART ⁺ STRING LIGHT	84
SMART ⁺ WIFI STRING LIGHT	84
SMART ⁺ TABLE LUMINAIRES	86
SMART ⁺ WIFI TABLE FRAME	86
SMART ⁺ WALL & BOLLARD LUMINAIRES	88
SMART ⁺ WIFI ECLIPSE	88
SMART ⁺ WIFI TRUNK SQUARE	90
SMART ⁺ WIFI SWING ROUND	92
SMART ⁺ WIFI PIPE	94
SMART ⁺ WIFI CASCADE	96
SMART ⁺ WIFI UPDOWN FLARE	98
SMART ⁺ WIFI CUBE	100
SMART ⁺ WIFI FLARE	102
SMART ⁺ WALL LUMINAIRES	104
SMART ⁺ WIFI ROTARY UPDOWN	104
SMART ⁺ WIFI BEAM ADJUSTABLE	106
SMART ⁺ WIFI BRICK	108
SMART ⁺ WIFI CURVE	110
SMART ⁺ SPIKE LUMINAIRES	112
SMART ⁺ WIFI GARDEN POLE	112
SMART ⁺ WIFI GARDEN SPOT	114
SMART ⁺ WIFI GARDEN DOT	116
SMART ⁺ ZB GARDENPOLE	118

CONTENT

OUTDOOR LUMINAIRES	120	ENDURA® STYLE SPOT	168
TABLE LUMINAIRES WITH INTEGRATED		ENDURA® STYLE SQUARE	170
LED MODULE	122	ENDURA® STYLE UPDOWN DECO	172
ENDURA® STYLE STAN TABLE CCT USB	122	ENDURA® STYLE UPDOWN	174
WALL AND BOLLARD LUMINAIRES WITH INTEGRATED LED MODULE	124	ENDURA® STYLE UPDOWN PUCK	176
ENDURA® STYLE BAT	124	ENDURA® STYLE WALL	178
ENDURA® STYLE CRYSTAL	126	ENDURA® STYLE WALL WIDE SENSOR	180
ENDURA® STYLE PYRAMID	128	ENDURA® STYLE WIDE	182
ENDURA® STYLE LANTERN MODERN	130	SPIKE LUMINAIRES WITH INTEGRATED	
ENDURA® STYLE CYLINDER	132	LED MODULE	184
WALL LUMINAIRES WITH INTEGRATED		ENDURA® GARDEN FLOOD SPIKE	184
LED MODULE	134	ENDURA® GARDEN DOT	186
ENDURA® STYLE RONDO	134	SOCKETED WALL & BOLLARD LUMINAIRES	188
ENDURA® STYLE IVO	136	ENDURA® CLASSIC FIGO	188
ENDURA® STYLE ILJA	138	ENDURA® CLASSIC EBRO	190
ENDURA® STYLE ILAY	140	ENDURA® CLASSIC AMBER	192
ENDURA® STYLE IDRI	142	ENDURA® CLASSIC CASCADE AMBER	194
ENDURA® STYLE IDAR	144	ENDURA® CLASSIC CASCADE CLEAR	196
ENDURA® STYLE IHSAN	146	ENDURA® CLASSIC FRAME	198
ENDURA® STYLE IVAN	148	ENDURA® CLASSIC CALICE	200
ENDURA® STYLE ADJUSTABLE BEAM	150	ENDURA® CLASSIC TRADITION ALU GOLD	202
ENDURA® STYLE ENTRANCE NUMBER	152	ENDURA® CLASSIC POST	204
ENDURA® STYLE DISC	154	SOCKETED WALL LUMINAIRES	206
ENDURA® STYLE BOW	156	ENDURA® CLASSIC RADO/RADICK	206
ENDURA® STYLE PLATE	158	ENDURA® CLASSIC ORBI/ORBICK	208
ENDURA® STYLE MINI SPOT	160	ENDURA® CLASSIC CUADRA	210
ENDURA® STYLE MIDI SPOT	162	ENDURA® CLASSIC ISIDOR	212
ENDURA® STYLE RING ROUND	164	ENDURA® CLASSIC ITYS/IVE	214
ENDURA® STYLE SHIELD SQUARE	166	ENDURA® CLASSIC SQUARE	216

ENDURA® CLASSIC SPOT SQUARE 218 ENDURA® CLASSIC CUBE ADJUSTABLE 220 ENDURA® CLASSIC ROTARY UPDOWN 222 ENDURA® CLASSIC TUBULAR 224 **ENDURA® CLASSIC CANNON** 226 ENDURA® CLASSIC BEAM 228 ENDURA® CLASSIC LANTERN CYLINDER 230 ENDURA® CLASSIC LANTERN SQUARE 232 SOCKETED SPIKE LUMINAIRES 234 **ENDURA® CLASSIC GARDEN SPOT SPIKE** 234 **FLOODLIGHTS** 236 SMART⁺ FLOODLIGHTS 238 SMART⁺ WIFI FLOOD 238 FLOODLIGHTS WITH SENSOR 240 ENDURA® PRO FLOOD SENSOR 240 ENDURA® PRO SPOT SENSOR 242 ENDURA® PRO UPDOWN SENSOR 244 ENDURA® FLOOD SENSOR WARM WHITE 246 ENDURA® FLOOD SENSOR COOL WHITE 248 FLOODLIGHT ESSENTIAL SENSOR WITH **EU PLUG** 250 FLOODLIGHT ESSENTIAL SENSOR 252 FLOODLIGHTS WITHOUT SENSOR 254 ENDURA® FLOOD WARM WHITE 254 ENDURA® FLOOD COOL WHITE 256 FLOODLIGHT ESSENTIAL 258

CAMERA LUMINAIRES	260
SMART ⁺ WIFI CLOUD CAMERA	262
SMART ⁺ WIFI GLOBE CAMERA TRACK & TRACE	264
SMART ⁺ WIFI CAMERA MULTI SPOT	266
SMART ⁺ WIFI CIRCLE CAMERA CONTROL	268
SMART ⁺ WIFI CAMERA ENTRANCE NUMBER	270
SMART ⁺ WIFI CAMERA ROUND	272
SMART ⁺ WIFI WALL CAMERA CONTROL	274
SMART ⁺ WIFI FLOOD CAMERA CONTROL	276
POS CONCEPTS	278
GLOSSARY	280




















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
SMART ⁺ BT Table Frame Solar RGB + W	4058075 763760	1	Black	Aluminum/Plastic (PC)	25 000	2.5	200	280	3 000	> 80	-	IP44


Product name		X NCL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	h	Ø d [mm]		
SMART ⁺ BT Table Frame Solar RGB + W	12500	_	Not replaceable	n/a	-	180	180	300	_	4	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser













Product name		X (Pict.)	LED MODULE NITEGRATED	CONNECTOR	ACCES- SORIES INCLIDED	[mm]	W [mm]	h	Ø d [mm]		
SMART ⁺ BT Table Lantern Solar RGB + W	12500		Not replaceable	n/a	_	_	-	260	200	4	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser




SMART⁺ BLUETOOTH SOLAR ALPS

Bring your outdoor spaces to life, day or night, with our versatile solar-powered wall and path lights - where innovative design meets functionality.

- Can be used without power: Solar technology enables operation in areas lacking electrical power, enhanced by an efficient sensor for the lights.
- Durable: Offers a minimum of 2.5 hours of lighting after full charge, with the ability to check battery life via an app and easy recharging through USB-C.
- Smart control: Can be controlled with SMART⁺ smartphone app or smart speaker.
- Versatile: Perfect for outdoor settings without power access, ideal for illuminating house facades, garages, entrance areas, paths, and gardens.
- IP44 protection: Designed for the outdoors, this light is moisture-proof, ensuring protection against splash water from all directions.





































	I IP
"	

		No.	COLOR	MATERIAL	UM	W	ойтрит	SOURCE	TV.	CRI		
SMART ⁺ BT ALPS Solar 70cm RGB + W	4058075 763746	1	Black	Aluminum/Plastic (PC)	25 000	6.0	400	600	3 000	> 80	_	IP44
SMART ⁺ BT ALPS Wall Solar RGB + W	4058075 763722	2	Black	Aluminum/Plastic (PC)	25 000	6.0	400	600	3 000	> 80	-	IP44

Product name		X NCL.	LED MODULE NITEGRATED	CONNECTOR	ACCES- NOTHES INCLINES	[mm]	W	(h	Ø d [mm]	
SMART ⁺ BT ALPS Solar 70cm RGB + W	12500	_	Not replaceable	n/a	Mounting screws, Plastic dowels, Mounting equipment	152	152	700	_	4
SMART ⁺ BT ALPS Wall Solar RGB + W	12500	_	Not replaceable	n/a	Mounting screws, Plastic dowels, Mounting equipment	152	193	365	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

SMART⁺ BLUETOOTH SPOT & BOLLARD WITH INDEPENDENT SOLAR PANEL Illuminate your garden's beauty, day and night, with our versatile solar-powered spot and bollard light, blending elegance with efficiency. - Can be used without power: Solar panel technology enables lighting in areas without electrical access, providing consistent illumination. Durable: Offers up to 10 hours of light on a dim setting, and a powerful 6.5 hours at full brightness, adaptable for various lighting needs. - Smart control: Can be controlled with SMART⁺ smartphone app or smart speaker. Versatile: Perfect for outdoor settings requiring independent power sources, and excellent for creating ambient or accent lighting around plants or trees. IP44 protection: Designed for the outdoors, featuring robust moisture-proofing against splashing water from all directions. 16












Product name		X P	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	(h	Ø d [mm]		
SMART ⁺ BOLLARD Spot Panel Solar RGB + W	12500	_	Not replaceable	n/a	Ground spike, Solar panel			455	48	4	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im 4	K	CRI		IP
SMART ⁺ BT Solar Path Light RGB + TW	4058075 763869	1	Black	Glass/Aluminum	15000	0.12	5	15	30006500	> 80	175	IP44


Product name		X PICL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	jh h	Ø d [mm]		
SMART ⁺ BT Solar Path Light RGB + TW	1 000	-	Not replaceable	n/a	Ground spike	-	-	562	150	4	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser













Product name		X PICL.	MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	h	Ø d [mm]		
SMART ⁺ BT Solar Spot Light RGB + TW	1 000	_	Not replaceable	n/a	-	92	245	348	_	4	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

















Product sizes (in mm)



























Product name	





















		ı
		_
_	IP44	

ENDURA Style Solar Bouquet 50cm Post Sensor 6W Stainless Steel	4058075 564527	1	Stainless steel	Aluminum	25 000	6.0	550	750	3 000	> 80	-	IP44
ENDURA Style Solar Bouquet 50cm Post Sensor 6W Black	4058075 564565	1	Black	Aluminum	25 000	6.0	550	750	3 000	> 80	-	IP44
ENDURA Style Solar Bouquet Wall Sensor 6W Stainless Steel	4058075 564503	2	Stainless steel	Aluminum	25 000	6.0	550	750	3 000	> 80	-	IP44
ENDURA Style Solar Bouquet Wall Sensor 6W Black	4058075 564541	2	Black	Aluminum	25 000	6.0	550	750	3 000	> 80	-	IP44

Product name		X NCGL.	MODULE MYEGANTO	CONNECTOR	ACCES- SORIES NOCLUDED	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Style Solar Bouquet 50cm Post Sensor 6W Stainless Steel	12500	_	Not replaceable	n/a	Screws, Plastic dowels	155	150	500	_	4
ENDURA Style Solar Bouquet 50cm Post Sensor 6W Black	12500	_	Not replaceable	n/a	Screws, Plastic dowels	155	150	500		4
ENDURA Style Solar Bouquet Wall Sensor 6W Stainless Steel	12500	_	Not replaceable	n/a	Screws, Plastic dowels	180	150	365		4
ENDURA Style Solar Bouquet Wall Sensor 6W Black	12500	_	Not replaceable	n/a	Screws, Plastic dowels	180	150	365	_	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



ENDURA STYLE SOLAR DOUBLE CIRCLE POST






Product colors



























































ENDURA Style Solar 40cm Post Sensor Double Circle 6W Stainless Steel	4058075 392700	1	Steel	Stainless steel	50 000	6.0	400	600	3 000	≥ 80	-	IP44
ENDURA Style Solar 40cm Post Sensor Double Circle 6W Black	4058075 392748	1	Black	Stainless steel	50 000	6.0	400	600	3 000	≥ 80	-	IP44
ENDURA Style Solar Wall Sensor Double Circle 6W Stainless Steel	4058075 392687	2	Steel	Stainless steel	50 000	6.0	400	600	3 000	≥ 80	-	IP44
ENDURA Style Solar Wall Sensor Double Circle 6W Black	4058075 392724	2	Black	Stainless steel	50 000	6.0	400	600	3 000	≥ 80	-	IP44

Product name		X NCL.	MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCLUDED	[mm]	W [mm]	(h	Ø d [mm]		
ENDURA Style Solar 40cm Post Sensor Double Circle 6W Stainless Steel	12500		Not replaceable	n/a	Screws, Plastic dowels		_	400	178	4	
ENDURA Style Solar 40cm Post Sensor Double Circle 6W Black	12500	-	Not replaceable	n/a	Screws, Plastic dowels	-	-	400	178	4	
ENDURA Style Solar Wall Sensor Double Circle 6W Stainless Steel	12500	-	Not replaceable	n/a	Screws, Plastic dowels	185	178	220	-	4	
ENDURA Style Solar Wall Sensor Double Circle 6W Black	12500	-	Not replaceable	n/a	Screws, Plastic dowels	185	178	220	-	4	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colors












Product name		X P	LED MODULE affegrated	CONNECTION	ACCES- SORIES INCLUDED	[mm]	W [mm]	(h	Ø d [mm]		
ENDURA Style Solar Wall Quadro Dark Gray	12500	-	Not replaceable	n/a	Screws, Plastic dowels	85	110	115	-	6	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser














Product name		X Proc.	LED MODULE MTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	(h	Ø d [mm]		
ENDURA Style Solar Wall Oxford Dark Gray	12500		Not replaceable	n/a	Screws, Plastic dowels	81	115	115		0	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



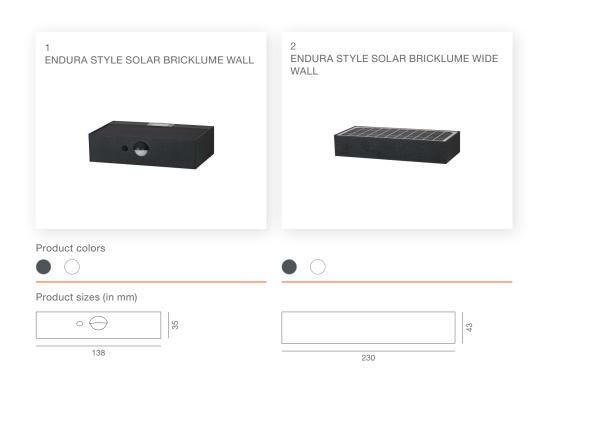






Product name	P		X D	MODULE NITEGRATED	CONNECTOR	ACCES- SORIES NELLUSS	[mm]	(mm)	Îh Immi	Ø d [mm]	
ENDURA Style Solar Bricklume Sensor Dark Gray	IP65	18 000	_	Not replaceable	n/a	Screws, Plastic dowels, Mounting equipment	138	90	35	_	4
ENDURA Style Solar Bricklume Sensor White	IP65	18 000	-	Not replaceable	n/a	Screws, Plastic dowels, Mounting equipment	138	90	35	-	4
ENDURA Style Solar Bricklume Sensor Wide Dark Gray	IP65	18 000	-	Not replaceable	n/a	Screws, Plastic dowels, Mounting equipment	230	97	43	-	4
ENDURA Style Solar Bricklume Sensor Wide White	IP65	18 000		Not replaceable	n/a	Screws, Plastic dowels, Mounting equipment	230	97	43	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser












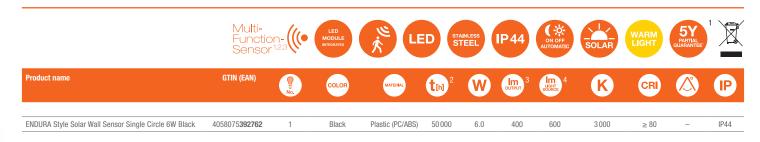

Product name		X O	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORES PACLUDED	[mm]	W	(h.	Ø d [mm]		
ENDURA Style Solar Wall Sensor Single Circle 6W Black	12500	-	Not replaceable	n/a	Screws, Plastic dowels	200	160	70	-	4	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser




ENDURA® STYLE SOLAR GLOW PIR SENSOR

Enhance your outdoor ambiance with our solar-powered, sensor-equipped wall luminaire.

- Can be used without power: Equipped with a solar panel for operation in areas lacking electrical access, featuring an efficient integrated sensor.
- Durable: Offers a significant burn time of 60 times
 30 seconds in PIR mode, with a battery recharge time of just 8 hours.
- Long life: The solar wall light has a lifespan of up to 25,000 hours, making it both a long-lasting and energy-efficient solution.
- Versatile: Ideal for various outdoor settings, perfect for illuminating house facades, garages, and entrance areas.
- IP44 protection: Designed for the outdoors, safeguarded against moisture and splash water ingress from all sides.












Product name		X PICL.	LED MODULE NTEGRATED	CONNECTOR	ACCES- SOPIES INCLUDED	[mm]	W [mm]	ţh.	Ø d [mm]		
FNDUDA OLL OLL OLL WILLO CON COOL	10.500			,		100	477				
ENDURA Style Solar Glow Wall Sensor 3.6W 3000K	12500		Not replaceable	n/a	Screws, Plastic dowels	160	177	80		2	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





























13	

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	оптрит 3	Im ught source	K	CRI		IP
ENDURA Style Solar Oval S Wall Sensor 4W 3000K	4058075 766266	1	Black	Aluminum	25 000	4.0	380	400	3 000	≥ 80	-	IP44
ENDURA Style Solar Oval Wall Sensor 6W 3000K	4058075 766228	1	Black	Aluminum	25 000	6.0	540	550	3 000	≥ 80	-	IP44
ENDURA Style Solar Oval Wall Sensor 6W 4000K	4058075 766242	1	Black	Aluminum	25 000	6.0	540	550	4000	≥ 80	-	IP44

Product name		X NCL.	LED MODULE RITEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W	(h	Ø d [mm]		
ENDURA Style Solar Oval S Wall Sensor 4W 3000K	12500	_	Not replaceable	n/a	Screws, Plastic dowels	200	124	45	_	4	
ENDURA Style Solar Oval Wall Sensor 6W 3000K	12500	-	Not replaceable	n/a	Screws, Plastic dowels	340	125	60	-	4	
ENDURA Style Solar Oval Wall Sensor 6W 4000K	12500	-	Not replaceable	n/a	Screws, Plastic dowels	340	125	60	-	4	


^{* 4058075766242 | ** 4058075766228; 4058075766266}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser












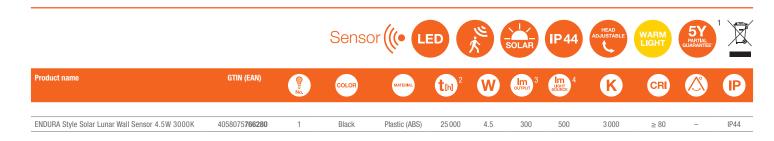

Product name		X PICL.	LED MODULE STEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	(mm)	ţ <u>h</u>	Ø d [mm]		
ENDURA Style Solar Lunar Wall Sensor 4.5W 3000K	12500	-	Not replaceable	n/a	Screws, Plastic dowels	160	231	83	-	4	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser




ENDURA® STYLE SOLAR TOSSA

A seamless blend of minimalistic design and innovative solar technology, crafted for stylish and efficient outdoor lighting.

- Can be used without power: Equipped with a solar panel for operation in areas lacking electrical access, featuring an efficient integrated sensor.
- Durable: Offers up to 8 hours of lighting per charge, with a battery recharge time of 12 hours.
- Long life: Up to 25,000 hours of energy-saving, long-lasting performance.
- Versatile: Perfect for various outdoor settings, including house facades, garages, and entrance areas.
- IP44 protection: Ideal for outdoor use, featuring moisture-proof protection against splash water.



























P

		0011001									
Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI	P
ENDURA Style Solar Tossa Wall Sensor 6W 3000K	4058075 766303	1	Black	Aluminum	25 000	6.0	500	650	3 000	≥ 80	 IP44

Product name		X PICL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	jh Imml	Ø d [mm]		
ENDURA Style Solar Tossa Wall Sensor 6W 3000K	12500	_	Not replaceable	n/a	Screws, Plastic dowels	160	173	50	_	4	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser








Product colors





Product sizes (in mm)























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	оптрит 3	Im 4	K	CRI		(IP)
ENDURA Style Utili Round Wall and Ground Dark Gray	4058075 834743	1	Dark gray	Aluminum	25 000	1.2	60	200	3 000	≥ 80	120	IP65
ENDURA Style Utili Square Wall and Ground Dark Gray	4058075 834729	2	Dark gray	Aluminum	25 000	1.2	60	200	3 000	≥ 80	120	IP65


Product name		X PICL.	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	(h)	Ød	
ENDURA Style Utili Round Wall and Ground Dark Gray	12500		Not replaceable	n/a	Screws, Ground spike, Base			115	140	6
ENDURA Style Utili Square Wall and Ground Dark Gray	12500	-	Not replaceable	n/a	Screws, Ground spike, Base	140	140	115	-	6

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser













Product name		X NCL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES VICUODO	[mm]	W [mm]	(þ.	Ø d [mm]	
ENDURA Garden Solar Spot Wall + Spike RGB + W	-	-	Not replaceable	n/a	Screws, Plastic dowels, Batteries, Ground spike	175	92	295	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

ENDURA® FLOOD BUTTERFLY SOLAR Bring your outdoor spaces to life with our versatile, solarpowered floodlights - bright, efficient, and crafted for convenience. Multifunctional: Features a unique butterfly design, equipped with PIR motion and daylight sensors, emitting cold white Sustainable: Eco-friendly operation using solar power, with a rechargeable battery for consistent, off-grid lighting. Long life: Offers an extended lifespan of up to 36,000 hours, providing luminous intensity while being energy-efficient. Instant & flexible use: Designed for quick and easy installation, suitable for various outdoor settings. IP65 protection: The LED floodlight is IP65 rated, making it ideal for lighting facades, garages and gardens. 46








































	' \	
Ε.		

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t _M ²	W	3 оптрит	Im ught source	K	CRI		IP
ENDURA Flood Butterfly Solar Sensor 1.5W	4099854 089657	1	Black	Plastic	36 000	1.5	220	230	4000	> 80	90	IP65
ENDURA Flood Butterfly Solar Sensor 4W	4099854 089671	2	Black	Plastic	36 000	4.0	500	510	4000	> 80	90	IP65
ENDURA Flood Butterfly Solar Sensor 8W	4099854 089695	3	Black	Plastic	36 000	8.0	850	860	4000	> 80	90	IP65

Product name		X Not.	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORIES NCLUSED	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Flood Butterfly Solar Sensor 1.5W	10 000	_	Not replaceable	n/a	Screws, Plastic dowels, Mounting equipment	96	79	145	_	8
ENDURA Flood Butterfly Solar Sensor 4W	10000	-	Not replaceable	n/a	Screws, Plastic dowels, Mounting equipment	140	115	211	-	8
ENDURA Flood Butterfly Solar Sensor 8W	10 000		Not replaceable	n/a	Screws, Plastic dowels, Mounting equipment	232	121	221	-	8

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser


ENDURA® FLOOD SOLAR DOUBLE SENSOR Empower your outdoor spaces with robust illumination! The powerful solar floodlight is designed to cast a bright light wherever you need it. - Solar powered: Equipped with a built-in sensor, this solar-powered LED floodlight can also be used where no power is available. - Long life: Offers an extended lifespan of up to 36,000 hours, providing luminous intensity while being energy-efficient. Long runtime: Reliable battery life lasts up to four hours at full brightness, with an intelligent lighting mode extending to eight hours. Versatile: Powerful outdoor floodlighting ideal for gardens, driveways, and other exterior areas needing strong light. IP65 protection: Designed for outdoor resilience, offering protection against moisture and splash water from all directions.



Product colors



Product sizes (in mm)



160




















1	P	

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA Flood Solar Double Sensor 2 W 3000 K	4058075 576636	1	Dark gray	Plastic	25 000	2.9	380	470	3 000	≥ 80	110	IP44


	Product name		X Prot.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES (NOCLIDED)	[mm]	W [mm]	(h	Ø d [mm]		
ENDURA Flood Solar Double Sensor 2 W 3000 K 12500 - Not replaceable n/a Screws, Plastic dowels 160 110 172 - 8	ENDURA Flood Solar Double Sensor 2 W 3000 K	12500		Not replaceable	n/a	Scrawe Plactic dowels	160	110	172		8	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

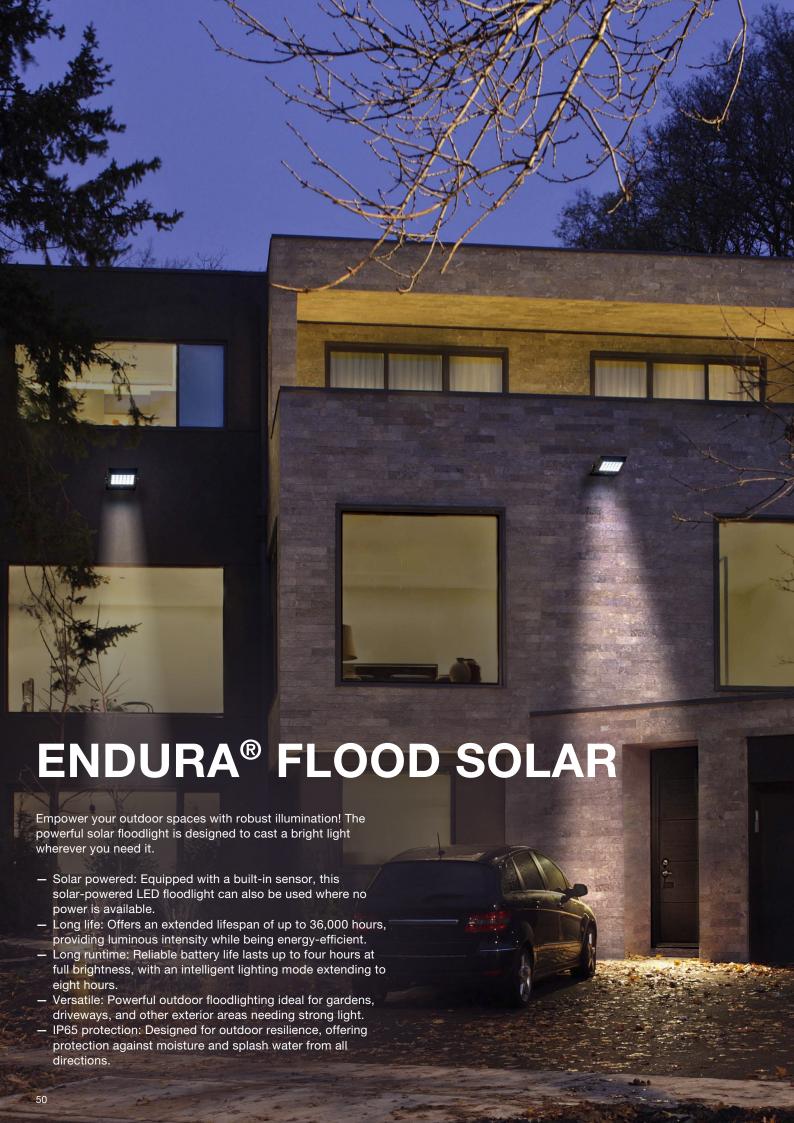







ENDURA Flood Solar 10 W 4000 K

4058075**762350**



95

IP65

≥ 80



Metal

36 000

10.0

1 200

1 250

4000

Black

Product name		X P	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	(mm)	(h	Ø d [mm]		
ENDURA Flood Solar 10 W 4000 K	36 000	-	Not replaceable	n/a	Remote control	194	67	313	-	4	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

HYBRID LUMINAIRES

Enjoy the versatility of LEDVANCE HYBRID LUMINAIRES, designed to blend seamlessly into your outdoor landscape. This innovative range offers the flexibility to power up with solar energy or connect to the mains, ensuring consistent lighting even when the sun sets. Switch between them with ease to suit your lighting requirements.

Easy to install with plug-and-play connectivity, these luminaires require no professional expertise, making them a simple yet effective addition to your exterior spaces. The system comes with a variety of accessories, including adaptable connectors and energy-efficient solar panels for a custom outdoor setup.

Prioritizing safety with low-voltage operation, these luminaires are crafted to safeguard both humans and animals. The IP44 protection of the luminaires ensures durability against the elements, making them perfect for gardens, patios, and walkways. LEDVANCE HYBRID LUMINAIRES bring together practicality and adaptability for a brilliantly lit outdoor environment.





ENERGY



OR




OR



MUST-HAVE

EASY CONNECT









GARDEN SPIKES | GARDEN INGROUNDS | BOLLARDS







MIN. 1 TOTAL MAX. 24 W









Product colors

































Product name	GTIN (EAN)	COLOR	MATERIAL	ACCES- SORIES NCLUDED	[mm]	W	Îh Ima	
ENDURA Hybrid Connector Set Black	4058075 834422	Black	Plastic/Rubber	_	52	20	48	8
ENDURA Hybrid Transformator Black	4058075 834408	Black	Plastic	-	149	50	39	8
ENDURA Hybrid Solar Panel Black	4058075 834620	Black	Plastic	Ground spike	245	205	390	4

^{* 4058075834408; 4058075834422 | ** 4058075834620 | *** 4058075834408}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser























е		
	IP	

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t[h] ²	W	lm 3	Im UGHT SOURCE	K	CRI		IP
ENDURA Hybrid Dallas 50cm 4W Dark Gray	4058075 834446	1	Dark gray	Stainless steel	25 000	4.0	300	500	3 000	≥ 80	120	IP44

Product name		X PICL.	LED MODULE NITEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W	(h)	Ø d [mm]		
ENDURA Hybrid Dallas 50cm 4W Dark Gray	12500	_	Not replaceable	Fast connector	Screws	176	76	500	_	4	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		P
ENDURA Hybrid Venus 50cm 4W Dark Gray	4058075 834460	1	Dark gray	Stainless steel	25 000	4.0	200	500	3 000	≥ 80	120	IP44

Product name		X PICL.	LED MODULE BITEGRATED	CONNECTOR	ACCES- SORIES (NOLLIDED)	[mm]	(mm)	(h	Ø d [mm]	3	
FAIDUDA Hubrid Vanua FOom AM Dayle Cray	10.500		Mat ranjagaahla	Foot connector	Caraus Bass	OF.	105	F00		4	
ENDURA Hybrid Venus 50cm 4W Dark Gray	12500		Not replaceable	Fast connector	Screws, Base	95	165	500		4	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	оптрит 3	Im ught source	K	CRI		P
ENDURA Hybrid Olona 50cm 2W Dark Gray	4058075 834484	1	Dark gray	Stainless steel	25 000	2.0	140	250	3 000	≥ 80	120	IP44


Product name		X Poct.	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	in i	Ø d [mm]	
ENDURA Hybrid Olona 50cm 2W Dark Gray	12500	-	Not replaceable	Fast connector	Screws	-	-	500	133	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	3 очтрит	Im ught source	K	CRI	IP
ENDURA Hybrid Rondo 50cm 4W Dark Gray	4058075 834507		Dark grav	Stainless steel	25 000	4.0	250	500	3 000	≥ 80	 IP44

Product name		X Poct.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	h	Ø d [mm]		
ENDURA Hybrid Rondo 50cm 4W Dark Gray	12500	-	Not replaceable	Fast connector	Screws	-	-	500	110	4	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colors





















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	Іт 3	Im 4	R	CRI		IP
		No.						SONGE				
ENDURA Hybrid Mari 48cm 4W Stainless Steel	4058075 834521	1	Steel	Stainless steel	25 000	4.0	240	500	3 000	≥ 80	120	IP44

Product name		X PICL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	h	Ø d [mm]		
ENDURA Hybrid Mari 48cm 4W Stainless Steel	12500	-	Not replaceable	Fast connector	Screws	_	-	480	180	4	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser
































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	Im 3	Im ught source	K	CRI		IP
FAIDUDA Hadrid Origa FOrga ON Obsiglacy Charl	4050075 004545	4	041	04-1-1	05.000	0.0	170	050	0.000	. 00	100	ID44
ENDURA Hybrid Orion 50cm 2W Stainless Steel	4058075 834545	1	Steel	Stainless steel	25 000	2.0	170	250	3 000	≥ 80	120	IP44
ENDURA Hybrid Orion Double 50cm 4W Stainless Steel	4058075 834569	2	Steel	Stainless steel	25 000	4.0	340	500	3 000	≥ 80	120	IP44

Product name		X ()	MODULE NITEGRATED	CONNECTOR	ACCES- SORIES NCLUDED	[mm]	(mm)	(h	Ø d [mm]		
ENDURA Hybrid Orion 50cm 2W Stainless Steel	12500		Not replaceable	Fast connector	Caraura			F00	98	4	
ENDURA Hybrid Orion Double 50cm 4W Stainless Steel	12500		Not replaceable	Fast connector	Screws			500	98	4	


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser







Product sizes (in mm)



Product name

ENDURA Hybrid Hagen 48cm 4W Stainless Steel

ENDURA Hybrid Hagen 48cm 4W Stainless Steel





3 0 0 0

480

98

4

≥ 80

120

IP44

500

Product name	X NCL.	LED MODULE SITEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W	(h	Ø d [mm]	

Fast connector

Stainless steel

25 000

Screws

4.0

340

COLOR

Steel

Not replaceable

GTIN (EAN)

4058075**834583**

12500


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colors



















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t M ²	W	оптрит 3	Im ught source	K	CRI		P
ENDURA Hybrid Naut Spike 2W Black	4058075 834644	1	Black	Plastic	25 000	2.0	100	250	3 000	≥ 80	120	IP44


Product name		X NCL.	LED MODULE BITEGRATED	COMMECTOR	ACCES- SORIES INCLUEDD	[mm]	(mm)	(h)	Ø d [mm]	
ENDURA Hybrid Naut Spike 2W Black	12500	-	Not replaceable	Fast connector	Screws, Ground spike, Base	-	-	310	95	6

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	оптрит 3	Im ught source	K	CRI		P
ENDURA Hybrid Spot Spike 1W Black	4058075 834668	1	Black	Aluminum	25 000	1.0	60	120	3 000	≥ 80	120	IP44

Product name		X O	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	(mm)	(h)	Ø d [mm]		
ENDURA Hybrid Spot Spike 1W Black	12500	-	Not replaceable	Fast connector	Screws, Ground spike, Base	74	60	290	-	6	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colors



















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	th) ²	W	lm 3	Im ught source	K	CRI		(P)
ENDURA Hybrid Rota Spike 1W Black	4058075 834682	1	Black	Plastic	25 000	1.0	40	120	3 000	≥ 80	120	IP44

Product name		X PICL.	LED MODULE INTEGRATED	CONNECTOR	AGCES- SORIES INCLUDED	[mm]	W [mm]	jh Imml	Ø d [mm]		
ENDURA Hybrid Rota Spike 1W Black	12500	-	Not replaceable	Fast connector	Ground spike	_	-	455	48	6	


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colors

















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t M ²	W	lm 3	lm ught source	K	CRI		IP
ENDURA Hybrid Spike 1W Stainles Steel			Steel	Stainless steel	25 000	1.0		120	3 000	> 80	120	IP44

Product name		X PICL.	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	h	Ø d [mm]		
ENDURA Hybrid Spike 1W Stainles Steel	12500	-	Not replaceable	Fast connector	Screws, Ground spike, Base	-	_	115	100	4	


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colors



















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	th) ²	W	оптрит 3	Im ught source	K	CRI		IP
ENDURA Hybrid Ball 2W White	4058075 834705	1	White	Plastic	25 000	2.0	180	250	3 000	≥ 80	120	IP44

Product name		X P	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	(h)	Ø d [mm]		
ENDURA Hybrid Ball 2W White	12500		Not replaceable	Fast connector	Ground spike			308	250	4	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser










Product colors










Product name		X PICL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES (NGLUGED	[mm]	W [mm]	h	Ø d [mm]		
SMART ⁺ String Light RGB + W	15 000	_	Not replaceable	Plug type C (EU)	-	7 468	45	210	_	2	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

SMART+ WIFI TABLE **FRAME** With a spectrum of 16 million colors to match any mood or moment, our mobile, smart-controlled table lamps can set the stage anywhere. Varied: Choose between a warm white glow or vibrant RGB color lighting to enhance any ambiance with 16 million color Battery powered: Completely mobile and independent, this table light doubles as a power bank, ready to use wherever Smart control: Can be controlled with SMART⁺ WiFi remote control, smartphone app, or smart speakers like Alexa and Google. Long life: Up to 25,000 hours of energy-saving, long-lasting performance. IP44 protection: Designed for outdoor environments, ensuring moisture-proof protection against water splashes from all sides.








Product sizes (in mm)



Product name











GTIN (EAN)



















IP	

		No.			Gas.	•		SOURCE	•			
SMART ⁺ Wifi Frame Table Powerbank USB RGB + W	4058075 564466	1	Dark gray	Aluminum	25 000	5.0	270	310	3 000	≥ 80	-	IP44
SMART+ Wifi Table Frame MAX Powerbank USB RGB + W	4058075 763241	1	Black	Aluminum/Plastic (PC)	25,000	5.0	270	310	3,000	> 80	270	IP44

Product name		INCL.	LED MODULE INTEGRATED	COMMECTOR	ACCES- SORIES INCLUDED	[mm]	W	(h	Ø d [mm]	
SMART ⁺ Wifi Frame Table Powerbank USB RGB + W	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Battery, USB cable	120	120	203	-	4
SMART ⁺ Wifi Table Frame MAX Powerbank USB RGB + W	12500	-	Not replaceable	USB	-	140	140	263	-	4

^{* 4058075564466}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

SMART+ WIFLECLIPS Enhance your outdoor landscape with our sophisticated WiFi-enabled wall and path lights, melding elegance with a rainbow of colors for the perfect ambiance. Varied: Enjoy the versatility of warm white or full-spectrum RGB lighting to create the desired atmosphere in any outdoor space. Robust Material: Constructed with premium stainless steel

sides.

and an opal plastic diffuser.

operformance.

Smart control: Can be controlled with SMART+ WiFi remote control, smartphone app, or smart speakers like Alexa and Google. Long life: Up to 25,000 hours of energy-saving, long-lasting

IP44 protection: Designed for outdoor environments, ensuring moisture-proof protection against water splashes from all







Product colors





Product sizes (in mm)






























					Ì							,
Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t h ²	W	іт 3	Im ught source	K	CRI		IP
SMART ⁺ Wifi Eclipse Wall RGB + W	4058075 763289	1	Silver	Stainless steel	25 000	10.0	250	850	3 000	≥ 80	330	IP44
SMART ⁺ WIFI Eclipse 50cm RGB + W	4058075 763302	2	Silver	Stainless steel	25 000	10.0	250	850	3 000	≥ 80	330	IP44
SMART ⁺ WIFI Eclipse 80cm RGB + W	4058075 763326	2	Silver	Stainless steel	25 000	10.0	250	850	3 000	≥ 80	330	IP44

Product name		X P	MODULE NITEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W	(h	Ø d [mm]	
SMART ⁺ Wifi Eclipse Wall RGB + W	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	-	-	102	150	4
SMART ⁺ WIFI Eclipse 50cm RGB + W	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	-	-	500	150	2
SMART ⁺ WIFI Eclipse 80cm RGB + W	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	_	_	800	150	2

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



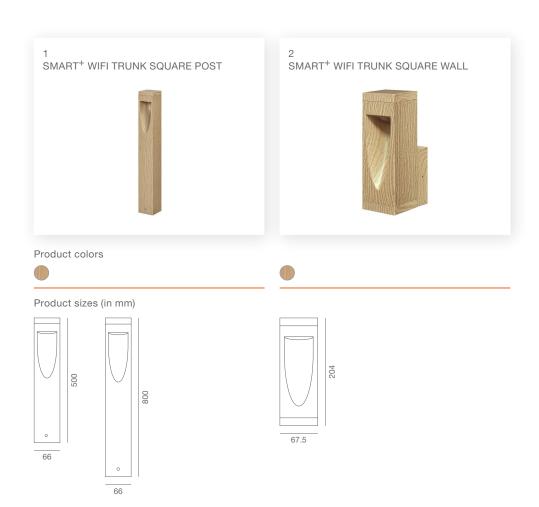







Product name		X PRGL.	LED MODULE INTEGRATED	COUNTECTOR	ACCES- SORIES DOCUMED	[mm]	(mm)	Þ	Ø d [mm]	6
SMART ⁺ Wifi Trunk SQ 50cm RGB + W	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	66	66	500	_	2
SMART ⁺ Wifi Trunk SQ 80cm RGB + W	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	66	66	800	-	2
SMART ⁺ Wifi Trunk SQ Wall RGB + W	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	68	97	204	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



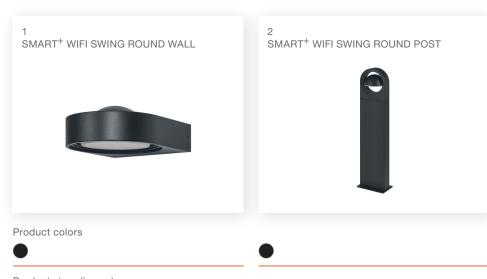












Product name		X O PACE.	LED MODULE NITEGRATED	CONNECTOR	ACCES- SORIES NELLORD	[mm]	W [mm]	(h	Ø d [mm]	
SMART ⁺ Wifi Swing Round Wall TW	12500		Not replaceable	Terminal, 2-Pole (L, N)	Screws, Allen wrench, Mounting equipment	160	185	65		4
SMART ⁺ Wifi Swing Round 70cm TW	12500	-	Not replaceable	Terminal, 2-Pole (L, N)	Screws, Allen wrench, Mounting equipment	170	65	700	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

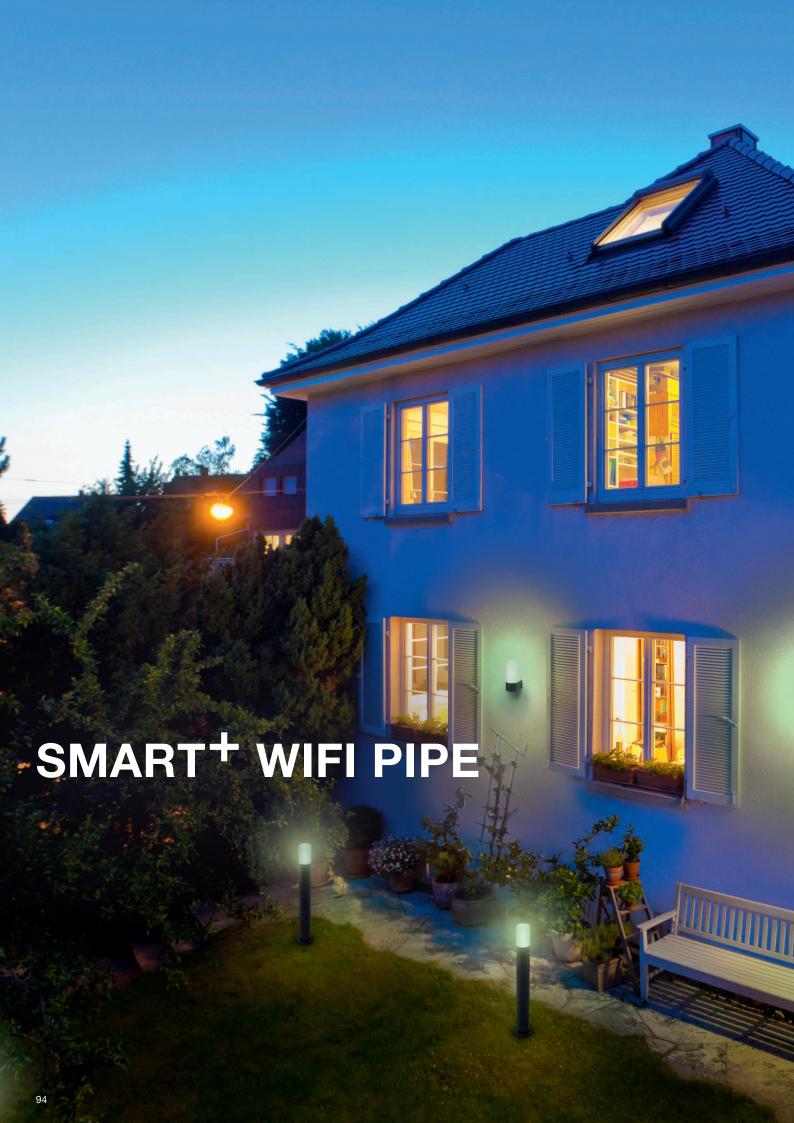







Product name		X P	LEO MODULE NITEGRATED	CONNECTOR	ACCES- SORIES INCLUDED		W	Þ	Ø d [mm]	4
SMART ⁺ Wifi Pipe 50cm Post RGB + W	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	_	_	500	135	2
SMART ⁺ Wifi Pipe 80cm Post RGB + W	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	_	_	800	89	2
SMART ⁺ Wifi Pipe Wall RGB + W	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	129	89	197	_	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser













Product sizes (in mm)





























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
SMART ⁺ Wifi Cascade Wall	4058075 564244	1	Dark gray	Aluminum	25 000	10.0	420	800	3 000	≥ 80	180	IP44
SMART ⁺ Wifi Cascade 50cm Post	4058075 564268	2	Dark gray	Aluminum	25 000	10.0	420	800	3 000	≥ 80	180	IP44
SMART+ Wifi Cascade 80cm Post	4058075 564282	2	Dark grav	Aluminum	25 000	10.0	420	800	3 000	≥ 80	180	IP44

Product name		X O	MODULE NTICGANTO	CONNECTOR	ACCES- SORIES NOCLUDED	[mm]	W [mm]	(h	Ø d [mm]	
SMART ⁺ Wifi Cascade Wall	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	160	120	180	_	4
SMART ⁺ Wifi Cascade 50cm Post	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	200	160	500	-	2
SMART ⁺ Wifi Cascade 80cm Post	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	200	160	800	_	2

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser











Product name		X P	LED MODULE NITEGRATED	CONNECTOR	ACCES- SORIES PACLUED	[mm]	W [mm]	Þ	Ø d [mm]	3
SMART ⁺ Wifi Flare Wall UpDown RGB + W	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	132	100	246	-	4
SMART ⁺ Wifi Flare 50cm Post UpDown RGB + W	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	194	144	500	-	2
SMART ⁺ Wifi Flare 80cm Post UpDown RGB + W	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	194	144	800	_	2


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



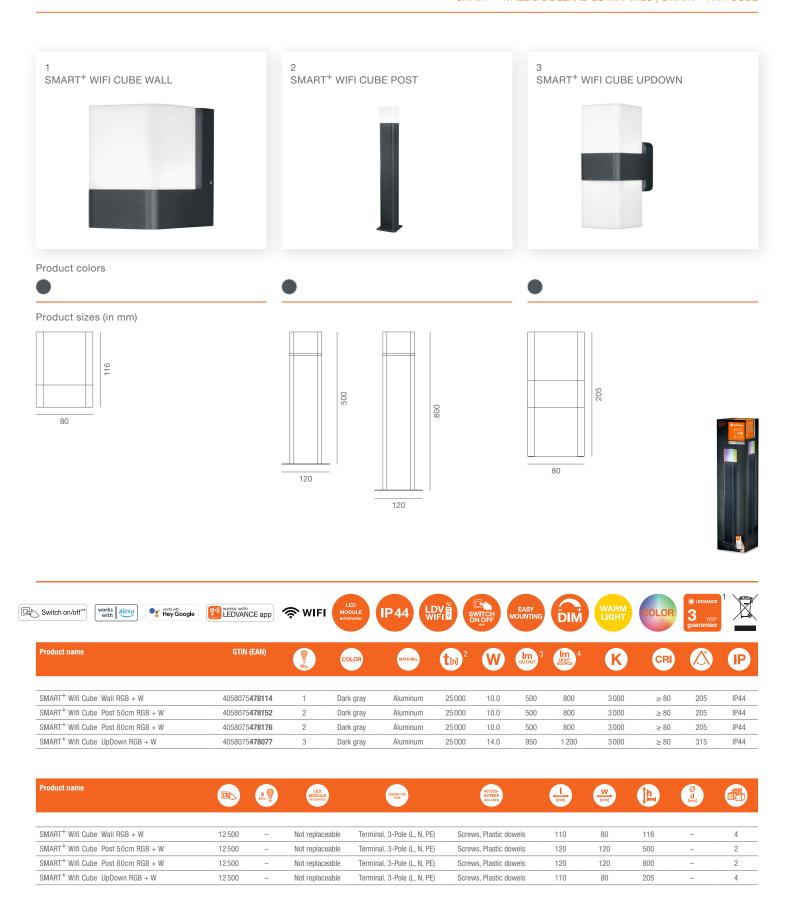

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

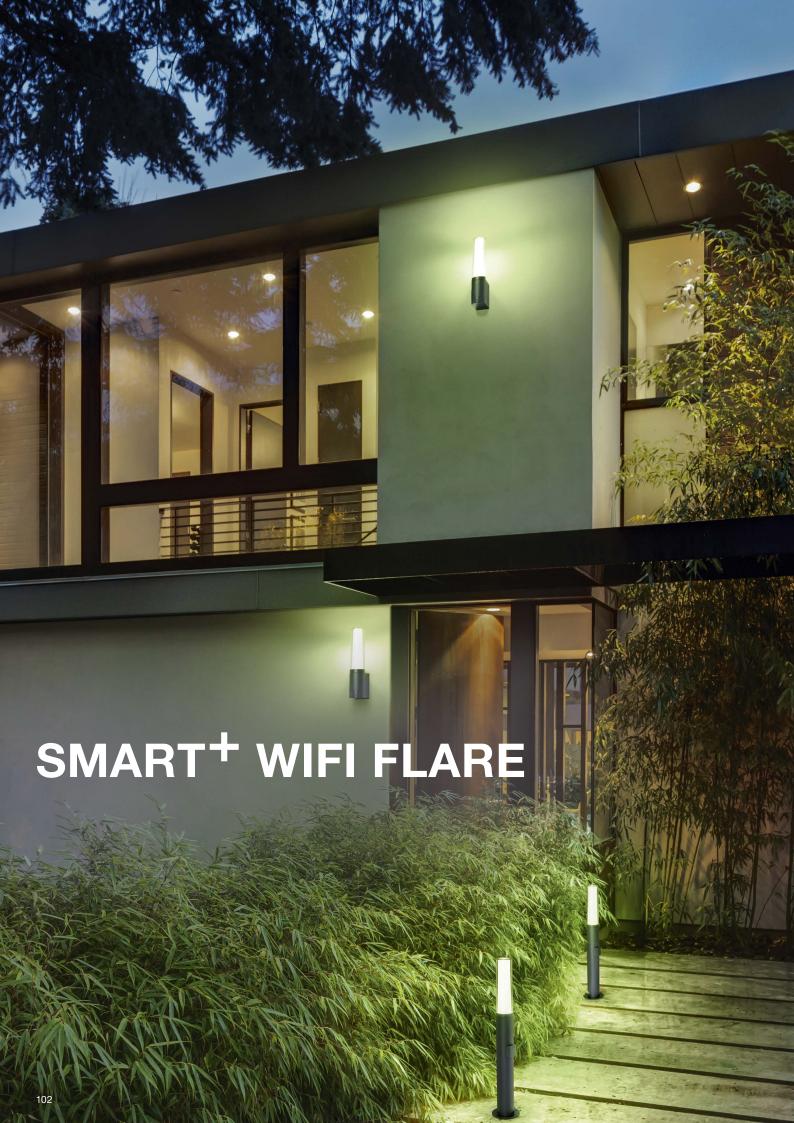

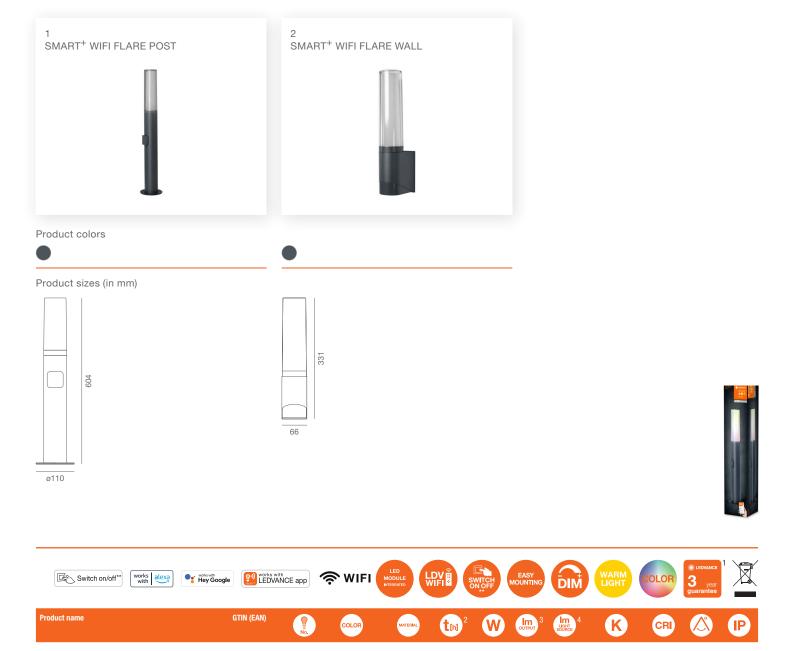

Product name		X PIGL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	(h	Ø d [mm]	
SMART+ Wifi Flare Post 60cm RGB + W	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	-	-	604	110	2
SMART ⁺ Wifi Flare Wall RGB + W	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	98	66	331	-	4

Aluminum

Aluminum

25 000

320

320

7.5

7.5

570

570

3000

230

230

≥ 80

≥ 80

IP44

IP44

Dark gray

Dark gray


SMART+ Wifi Flare Post 60cm RGB + W

SMART⁺ Wifi Flare Wall RGB + W

4058075**478299**


4058075**478275**

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

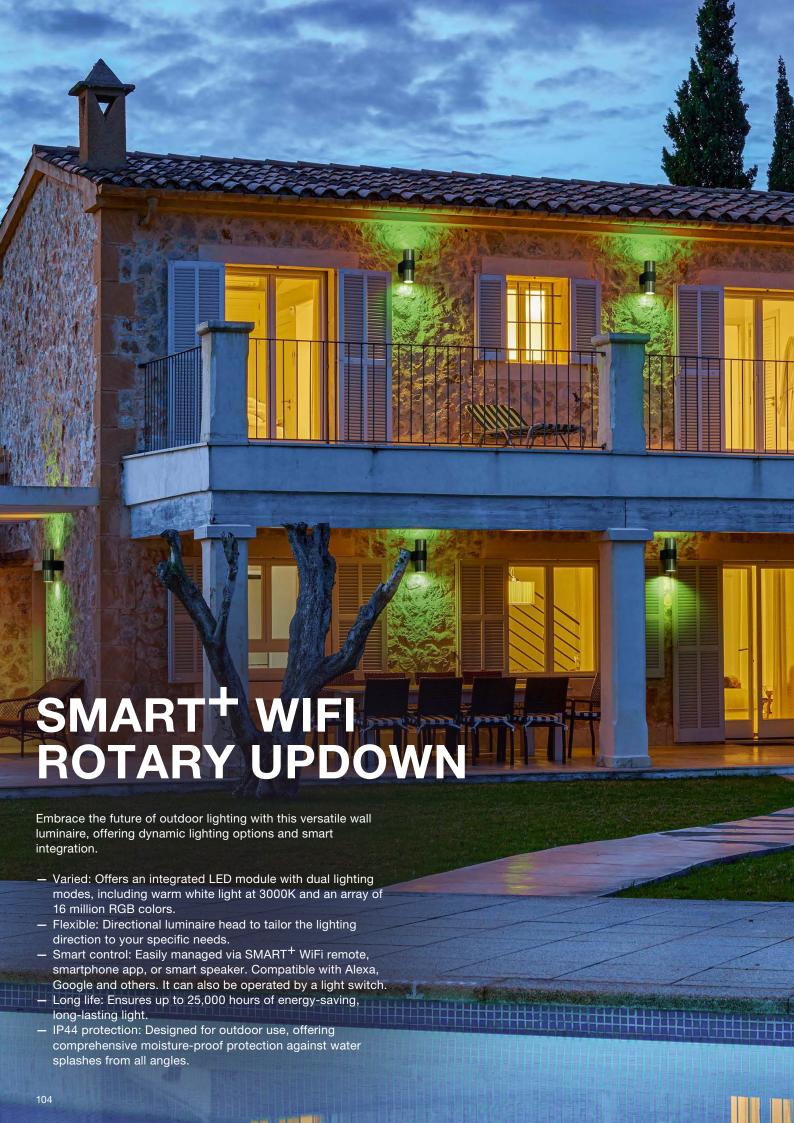











Product name		X O	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	(h	Ø d [mm]	
SMART ⁺ Wifi Rotary Updown RGB + W	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	69	112	175	60	Δ
SWART WIII ROLATY UPDOWN RGB + W	12500		NOT replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowers	09	112	1/0	00	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser







Product sizes (in mm)



100







Product name		X O	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	(mm)	h	Ø d [mm]		
CAMADET WISE Decree Adjustable Well DOD. TW	100,000		Not controvable	Toursiand O Date (LAD)	Communication desired	100	105	100		4	
SMART ⁺ Wifi Beam Adjustable Wall RGB + TW	100 000		Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	100	105	100		4	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



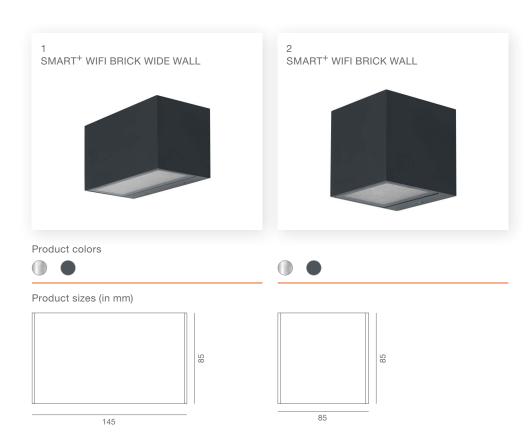



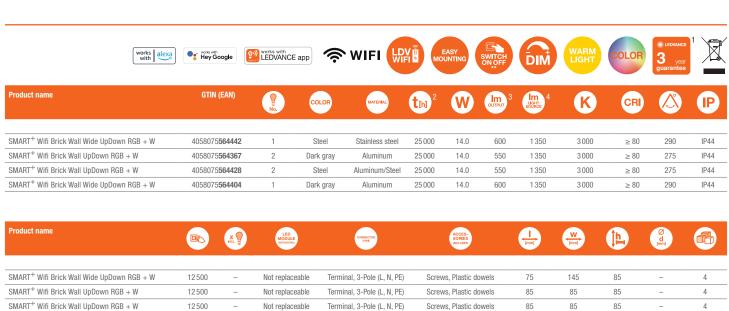

Terminal, 3-Pole (L, N, PE)

Screws, Plastic dowels

145

75

85

Not replaceable

12500

SMART+ Wifi Brick Wall Wide UpDown RGB + W

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser










































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
SMART+ Wifi Curve Wall RGB + W	4058075 478336	1	Dark gray	Aluminum	25 000	10.0	550	850	3000	≥ 80	260	IP44
SMART+ Wifi Curve Wall RGB + W	4058075 478350	1	Silver	Aluminum	25 000	10.0	550	850	3 000	≥ 80	260	IP44

Product name		X Not.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W	(h	Ø d [mm]	
SMART ⁺ Wifi Curve Wall RGB + W	12500		Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	93	100	248	_	4
SMART ⁺ Wifi Curve Wall RGB + W	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	93	100	248	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser









































ear	/ L
ee	

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
SMART ⁺ Wifi Garden Pole Mini 3P Ext RGB + W	4058075 478237	1	Steel	Stainless steel	25 000	1.9	45	132	3 000	≥ 80	280	IP65
SMART ⁺ Wifi Garden Pole 3P Ext RGB + W	4058075 478251	1	Steel	Stainless steel	25 000	3.1	110	210	3 000	≥ 80	280	IP65
SMART ⁺ Wifi Garden 5 Pole Mini RGB + W	4058075 478190	2	Steel	Stainless steel	25 000	3.8	75	220	3 000	≥ 80	280	IP65
SMART ⁺ Wifi Garden Pole RGB + W	4058075 478213	2	Steel	Stainless steel	25 000	5.7	200	350	3 000	≥ 80	280	IP65

Product name		NGL.	LED MODULE antegratio	CONNECTOR	ACCES- SORIES (NCLUDED	[mm]	W	(h	Ø d [mm]	a
SMART ⁺ Wifi Garden Pole Mini 3P Ext RGB + W	12500	_	Not replaceable	Plug, EU	_		22	227	22	4
SMART ⁺ Wifi Garden Pole 3P Ext RGB + W	12500	-	Not replaceable	Plug, EU	_	-	38	365	38	4
SMART ⁺ Wifi Garden 5 Pole Mini RGB + W	12500		Not replaceable	Plug, EU	_	-	22	227	22	4
SMART ⁺ Wifi Garden Pole RGB + W	12500	-	Not replaceable	Plug, EU	_	_	-	365	38	4

^{* 4058075478237; 4058075478251 | ** 4058075478190; 4058075478191 | *** 4058075478191 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 | *** 4058075478213 |}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser








Product colors





Product sizes (in mm)

SMART+ Wifi Garden Spot 3P RGB + W





76

1 200

3 000



works with alexa with Hey Google	LEDVANCE app	≫ WIFI	EXTENSION LOW VOLT	MOUNTING 1	× 1 (3	×	WFI B	DIM	LIGHT	COLOR	3 year guarantee	
Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t _[h] ²	W	оптрит 3	Im ught source	K	CRI		P
SMART ⁺ Wifi Garden Spot 1P Ext RGB + W	4058075 478398	1	Dark gray	Aluminum	25 000	4.5	240	400	3 000	≥ 80	76	IP65
SMART ⁺ Wifi Garden Spot RGB + W	4058075 478374	1	Dark gray	Aluminum	25 000	5.0	240	400	3 000	≥ 80	76	IP65

Product name		X Noc.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORES NOLUM	[mm]	W	(h	Ø d [mm]	
SMART ⁺ Wifi Garden Spot 1P Ext RGB + W	12500	_	Not replaceable	Plug, EU	Mounting screws, Plastic dowels	145	90	295	_	4
SMART ⁺ Wifi Garden Spot RGB + W	12500	-	Not replaceable	Plug, EU	Mounting screws, Plastic dowels	145	90	295	-	4
SMART ⁺ Wifi Garden Spot 3P RGB + W	12500	_	Not replaceable	Plug, EU	Mounting screws, Plastic dowels	145	90	295	_	4

4058075**478497**

2

Dark gray

^{* 4058075478497 | ** 4058075478374; 4058075478398 | *** 4058075478497; 4058075478374 | **** 4058075478398}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






SMART⁺ WIFI GARDEN DOT 9P



SMART⁺ WIFI GARDEN DOT 18P

Product colors































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	оптьп 3	Im ught source	K	CRI		P
SMART ⁺ Wifi Garden Dot 3P Ext RGB	4058075 478572	1	Transparent	Plastic (PC)	25 000	0.7	110	210	RGB		33	IP65
SMART ⁺ Wifi Garden Dot 9P RGB	4058075 478534	2	Transparent	Plastic (PC)	25 000	2.5	380	630	RGB	_	33	IP65
SMART ⁺ Wifi Garden Dot 18P RGB	4058075 478558	3	Transparent	Plastic (PC)	25 000	4.0	680	1 260	RGB	-	33	IP65

Product name		X NCL.	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORIES NICLUSED	[mm]	(mm)	(h	Ø d [mm]	
SMART ⁺ Wifi Garden Dot 3P Ext RGB	12500	_	Not replaceable	Plug, EU	Mounting screws, Plastic dowels	-	23	96	-	4
SMART ⁺ Wifi Garden Dot 9P RGB	12500	-	Not replaceable	Plug, EU	Mounting screws, Plastic dowels	-	23	96	-	4
SMART ⁺ Wifi Garden Dot 18P RGB	12500	_	Not replaceable	Plug, EU	Mounting screws, Plastic dowels	-	23	96	_	4

^{* 4058075478558 | ** 4058075478572 | *** 4058075478534}


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colors









Product name		X PICL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	(h	Ø d [mm]		
SMART ⁺ ZB GARDENPOLE	10 000	_	Not replaceable	Plug type C (EU)	-	14000	38	367	38	2	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

OUTDOOR LUMINAIRES

Discover the benefits of LEDVANCE OUTDOOR LUMINAIRES, which combine energy-saving properties, elegant design and practical functionality for outdoor lighting. Our extensive range of outdoor lights includes everything from elegant table lamps to powerful floodlights, charming garden lanterns to smart sensor lights and more. Whether you're looking to add a warm glow to your garden paths, a splash of radiance to your facade, or reliable illumination for security, our collection has you covered.

Made from high-quality materials like aluminum and glass, our luminaires are built for durability and consistent performance. Features such as adjustable heads and garden spikes allow for customized illumination, ensuring every corner of your outdoor space is perfectly lit. With IP44 to IP65 protection, they offer reliable weather resistance.

Create a safe, inviting and beautifully lit atmosphere with LEDVANCE outdoor lighting.










Product colors




























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t M ²	W	оптрит 3	LIGHT SOURCE 4	K	CRI
ENDURA Style Table CCT USB Beige	4099854 185342	1	Beige	Aluminium/Plastic (ABS)	50 000	2.5	200	280	2700/4000/6500	> 80
ENDURA Style Table CCT USB Dark Gray	4099854 185366	1	Dark gray	Aluminium/Plastic (ABS)	50 000	2.5	200	280	2700/4000/6500	> 80
ENDURA Style Table CCT USB Magenta	4099854 185380	1	Magenta	Aluminium/Plastic (ABS)	50 000	2.5	200	280	2700/4000/6500	> 80


Product name		IP		X NCL.	MODULE NTEGRATO	CONNECTOR	ACCES- SORIES NCLUOED	[mm]	(mm)	(h	Ø d [mm]	
ENDURA Style Table CCT USB Beige	100	IP54	100 000	_	Not replaceable	USB	USB-C cable	_	_	300	110	4
ENDURA Style Table CCT USB Dark Gray	100	IP54	100 000	_	Not replaceable	USB	USB-C cable	_	_	300	110	4
ENDURA Style Table CCT USB Magenta	100	IP54	100 000	_	Not replaceable	USB	USB-C cable	-	-	300	110	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



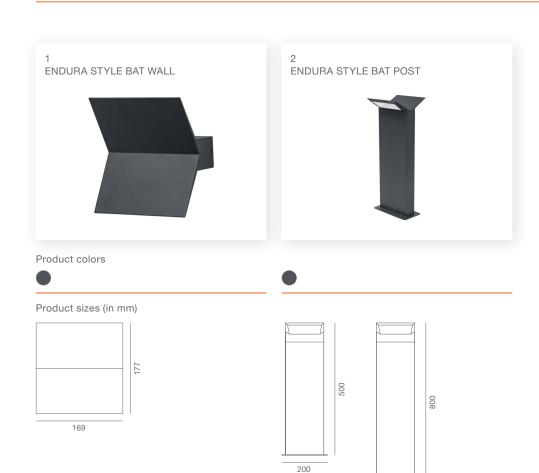



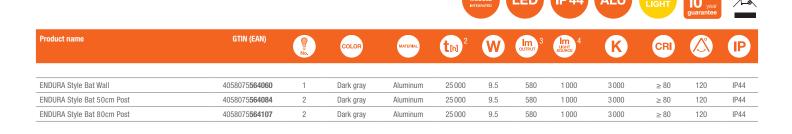

200

Product name		X O	LED MODULE NITEGRATED	CONNECTOR TYPE	ACCES- SORIES INCLUED	[mm]	W	(h	Ø d [mm]	
ENDURA Style Bat Wall	12500		Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	177	169	84		4
ENDURA Style Bat 50cm Post	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	200	177	500	-	2
ENDURA Style Bat 80cm Post	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	200	177	800	-	2

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





^{* 4058075474154}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser
































	X
,	

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im 4	K	CRI		IP
ENDURA Style Pyramid 50cm Post 9W	4058075 477919	1	Steel	Stainless steel	25 000	9.0	600	1 000	3 000	≥ 80	90	IP44
ENDURA Style Pyramid 80cm Post 9W	4058075 477933	1	Steel	Stainless steel	25 000	9.0	600	1 000	3 000	≥ 80	90	IP44
ENDURA Style Pyramid Wall 9W	4058075 477896	2	Steel	Stainless steel	25 000	9.0	600	1 000	3 000	≥ 80	90	IP44

Product name		X P	MODULE NTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W	Þ	Ø d [mm]	
ENDURA Style Pyramid 50cm Post 9W	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	100	100	500	-	2
ENDURA Style Pyramid 80cm Post 9W	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	100	100	800	-	2
ENDURA Style Pyramid Wall 9W	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	125	100	100	-	4


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser




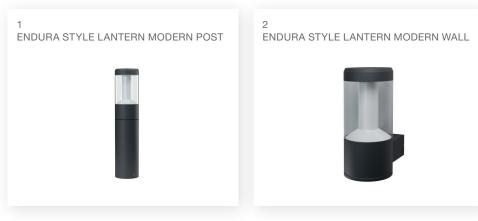





























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t M ²	W	lm 3	lm 4 source 4	K	CRI		P
ENDURA Style Lantern Modern 50cm 12W	4058075 205031	1	Dark gray	Aluminum	30 000	12.0	610	900	3 000	> 80	360	IP44
ENDURA Style Lantern Modern 90cm 12W	4058075 205055	1	Dark gray	Aluminum	30 000	12.0	610	900	3 000	> 80	360	IP44
ENDURA Style Lantern Modern Wall 12W	4058075 205017	2	Dark gray	Aluminum	30 000	12.0	610	900	3 000	> 80	360	IP44

Product name		X P	LED MODULE NTGGGATED	CONNECTION TYPE	ACCES- SORES ROLLOGO		W	(h	Ø d [mm]	
ENDURA Style Lantern Modern 50cm 12W	15 000	_	Not replaceable	Screw terminal	Screws, Allen wrench, Base	_	_	500	110	2
ENDURA Style Lantern Modern 90cm 12W	15 000	-	Not replaceable	Screw terminal	Screws, Allen wrench, Base	-	-	900	110	2
ENDURA Style Lantern Modern Wall 12W	15 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	176	110	240	-	4

^{* 4058075205031 | ** 4058075205055 | *** 4058075205031; 4058075205055}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





^{* 4058075205376 | ** 4058075205390 | *** 4058075205352}


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser
































•	
	6

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA Style Rondo Wall Stainless Steel	4058075 835108	1	Steel	Stainless steel	25 000	9.0	700	1 000	3 000	≥ 80	120	IP44
ENDURA Style Rondo Wall Dark Gray	4058075 835146	1	Dark gray	Stainless steel	25 000	9.0	700	1 000	3 000	≥ 80	120	IP44
ENDURA Style Rondo Wall Sensor Stainless Steel	4058075 835122	1	Steel	Stainless steel	25 000	9.5	700	1 000	3 000	≥ 80	120	IP44
ENDURA Style Rondo Wall Sensor Dark Gray	4058075 835160	1	Dark gray	Stainless steel	25 000	9.5	700	1 000	3 000	≥ 80	120	IP44

Product name		X Not.	MODULE NITEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	<u>į</u> h	Ø d [mm]	
ENDURA Style Rondo Wall Stainless Steel	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	110	150	205	_	4
ENDURA Style Rondo Wall Dark Gray	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	110	150	205	_	4
ENDURA Style Rondo Wall Sensor Stainless Steel	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	110	150	205	_	4
ENDURA Style Rondo Wall Sensor Dark Gray	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	110	150	205	-	4

^{* 4058075835122; 4058075835160}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser












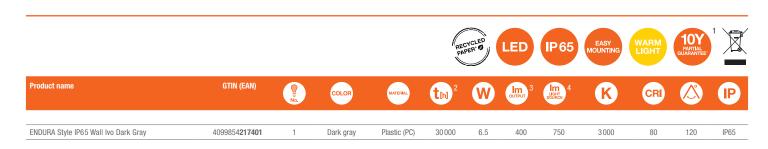

Product name		X P	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	(h)	Ø d [mm]		
ENDURA Style IP65 Wall Ivo Dark Gray	15000	-	Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	240	41	80	-	4	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser












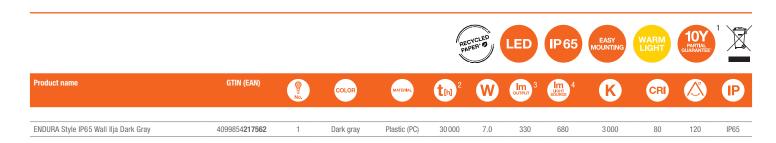


Product name		X O	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	(h	Ø d [mm]		
ENDURA Style IP65 Wall Ilja Dark Gray	15000	-	Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	200	40	125	-	4	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser













Product name		X PICL.	LED MODULE STEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W	(h	Ø d [mm]		
ENDURA Style IP65 Wall Ilay Dark Gray	15 000		Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	172	46	82		4	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser













	No.		LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	[h	d [mm]	
ENDURA Style IP65 Wall Idri Dark Gray 15	5 000	– Not	replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	230	00	101	_	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	th 2	W	lm 3	Im ught source	K	CRI		P
ENDURA Style IP65 Wall Idar Dark Gray	4099854 217548	1	Dark gray	Plastic (PC)	30 000	7.5	340	900	3000	80	103	IP65

Product name		X PICL.	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	ţ <u>h</u>	Ø d [mm]		
ENDURA Style IP65 Wall Idar Dark Gray	15 000		Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	113	51	220		4	


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colors



















∕ ⊷	

					•							_
Product name	GTIN (EAN)	No.	COLOR	MATERIAL	th 2	W	lm 3	Im UGHT SOURCE	K	CRI		IP
ENDURA Style IP65 Wall Ihsan Dark Gray	4099854 217586	1	Dark gray	Plastic (PC)	30 000	11.0	550	12 000	3 000	80	205	IP65

Product name		X Poct.	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	(mm)	(h	Ø d [mm]	3
ENDURA Style IP65 Wall Ihsan Dark Gray	15 000	-	Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	170	140	170	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

ENDURA® STYLE IVAN











Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t _M ²	W	3 очтрит	Im ught source	K	CRI		IP
ENDURA Style IP65 Wall Ivan Dark Gray	4099854 217425	1	Dark gray	Plastic (PC)	30 000	1.9	85	230	3 000	80	150	IP65

Product name		X Proc.	LED MODULE SITEGRATED	CONNECTOR	ACCES- SORIES (NOLLIDED	[mm]	(mm)	(h)	Ø d [mm]		
ENDURA Style IP65 Wall Ivan Dark Gray	15 000	-	Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	230	27	80	-	4	


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colors










Product name		X Not.	MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCLUOTED	[mm]	W	(h	Ø d [mm]	a
ENDURA Style Adjustable Beam Sensor USB Dark Gray	100 000	-	Not replaceable	USB	Screws, Plastic dowels, USB-C cable	100	97	126	-	4


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t _[h] ²	W	оптрит 3	Im ught source	K	CRI		P
ENDURA Style Entrance Dark Gray	4099854 185328	1	Dark gray	Aluminium/Plastic (ABS)	50 000	12.5	900	1 650	3 000	> 80	110	IP44
ENDURA Style Entrance Sensor Dark Gray	4099854 185274	1	Dark gray	Aluminium/Plastic (ABS)	50 000	13.0	900	1 650	3 000	> 80	110	IP44

Product name		X PRGL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W	(h	Ø d [mm]	
ENDURA Style Entrance Dark Gray	100 000		Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	150	62	235		4
ENDURA Style Entrance Sensor Dark Gray	100 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	150	62	235	_	4

^{* 4099854185274}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser









Product colors





Product sizes (in mm)























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t M ²	W	lm 3	Im ught source	K	CRI		P
ENDURA Style Disc Wall 8W	4058075 564121	1	Steel	Stainless steel	25 000	8.0	370	850	3 000	≥ 80	-	IP44
ENDUDA Style Disc Wall Sensor 9W	4059075 564145	2	Stool	Stainlage etaal	25,000	8.0	270	850	3 000	~ 80		IDAA

Product name		X O	LED MODULE INTEGRATED	CONNECTION TYPE	ACCES- SORIES INCLUDED	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Style Disc Wall 8W	12500		Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	-	_	60	200	4
ENDURA Style Disc Wall Sensor 8W	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	244	200	60	-	4

^{* 4058075564145}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser













										guarant	ee
Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI	
ENDURA Style Bow Wall	4058075 564589	1	Dark gray	Aluminum	25 000	7.0	280	750	3 000	> 80	355

Product name	IP		X INCL.	MODULE NITEGRATED	CONNECTOR	ACCES- SORIES NELLUGED	[mm]	W [mm]	(h)	Ø d [mm]	
ENDURA Style Bow Wall	IP54	100 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	270	07	58	_	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser








Product colors





Product sizes (in mm)























IP	


Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA Style Plate Wall 12W	4058075 477858	1	Steel	Steel	25 000	12.0	650	1 500	3 000	≥ 80	108	IP44
ENDURA Style Plate Wall Sensor 12,5W	4058075 477872	2	Steel	Steel	25 000	12.5	650	1 500	3 000	≥ 80	108	IP44

Product name		X PICL.	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORIES (NOLLIDED	[mm]	(mm)	(h)	Ø d [mm]		
ENDURA Style Plate Wall 12W	12500	_	Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	54	180	280	_	4	
ENDURA Style Plate Wall Sensor 12,5W	12500	_	Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	60	180	283	_	4	

^{* 4058075477872}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



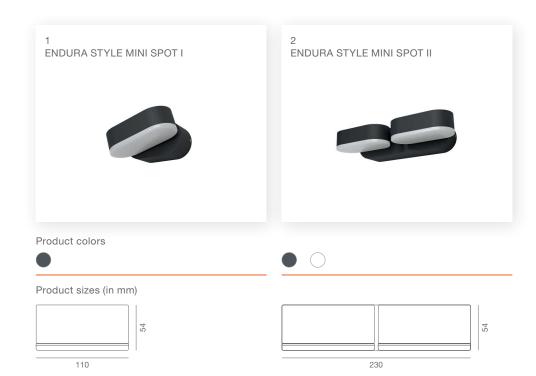





Product name		X PROL.	MODULE WITESPATTO	CONNECTOR TYPE	ACCES- SORIES NOLLOTO	[mm]	W	(h	Ø d [mm]	
ENDURA Style Mini Spot I 8W Dark Gray	15 000	_	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	100	110	54	_	6
ENDURA Style Mini Spot II 13.5W Dark Gray	15 000	_	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	100	230	54	_	6
ENDURA Style Mini Spot II 13.5W White	15 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	100	230	54	-	6


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colors









Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t _[h] ²	W	lm 3	Im 4	K	CRI		IP
ENDURA Style Midi Spot I 13.5W	4058075 205475	1	Dark gray	Aluminum	30 000	13.5	800	1 450	3 000	> 80	110	IP44

Product name		X PICL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCLUDED	[mm]	(mm)	(h	Ø d [mm]	a
ENDURA Style Midi Spot I 13.5W	15 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	162	125	128	-	6


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colors











Product name		X PROL.	LED MODULE BITEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	(h	Ø d [mm]		
ENDURA Style Ring 13.5W Dark Gray	15 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels	202	202	45	202	6	


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser







Product sizes (in mm)



ENDURA Style Shield Square 11W Dark Gray

4058075**205314**





Aluminum

30 000

10.5

410

1150

3 000

> 80

IP44

Product name		X O	LED MODULE INTEGRATEO	CONNECTOR	ACCES- SORIES NELLUGED	[mm]	W	(h	Ø d [mm]	
ENDURA Style Shield Square 11W Dark Gray	15000	-	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	60	240	142	-	6


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser







Product sizes (in mm)



Product name

ENDURA Style Spot 8W Dark Gray

4058075**214095**





440

750

3 000

> 80

IP44

Product name		NCL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCLUED	[mm]	(mm)	(h)	Ø d [mm]	
ENDURA Style Spot 8W Dark Gray	12500	_	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	135	90	140		6

Aluminum

30 000

8.0

Dark gray


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser




























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	th) ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA Style Square 13.5W Dark Gray	4058075 205253	1	Dark gray	Aluminum	30 000	13.5	480	1 450	3 000	> 80	100	IP44
ENDURA Style Square 13.5W White	4058075 205277	1	White	Aluminum	30 000	13.5	600	1 450	3 000	> 80	100	IP44

Product name		X NCL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	Îh Immi	Ø d [mm]		
ENDURA Style Square 13.5W Dark Gray	15000		Not replaceable	Screw terminal	Screws, Plastic dowels	202	202	45		6	
ENDURA Style Square 13.5W White	15 000	_	Not replaceable	Screw terminal	Screws, Plastic dowels	202	202	45	-	6	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



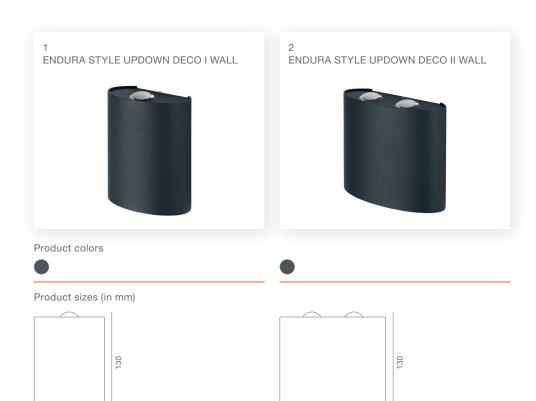





140

Product name		X O	MODULE MITEGRATED	CONNECTOR	ACCES- SORIES NCLUOZO	[mm]	(mm)	(h	Ø d [mm]	
ENDURA Style UpDown Deco I 6W Dark Gray	100 000	_	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	50	100	130	_	6
ENDURA Style UpDown Deco II 11W Dark Gray	100 000		Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	50	140	130	-	6

100

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser
































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t M ²	W	lm 3	lm ught source	K	CRI		IP
ENDURA Style UpDown 12W Dark Gray	4058075 214057	1	Dark gray	Aluminum	30 000	12.0	700	1 050	3 000	> 80	100	IP44
ENDURA Style UpDown 12W White	4058075 214071	1	White	Aluminum	30 000	12.0	700	1 050	3 000	> 80	100	IP44
ENDURA Style UpDown 12W Aluminium	4058075 205604	1	Aluminum	Aluminum	30 000	12.0	700	1 050	3 000	> 80	100	IP44

Product name		X PROL.	MODULE MICHARID	CONNECTOR	ACCES- SORIES VICLUOID	[mm]	W	(h	Ø d [mm]	
ENDURA Style UpDown 12W Dark Gray	15 000	_	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	55	90	160	_	6
ENDURA Style UpDown 12W White	15 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	55	90	160	-	6
ENDURA Style UpDown 12W Aluminium	15 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	55	90	160	-	6

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

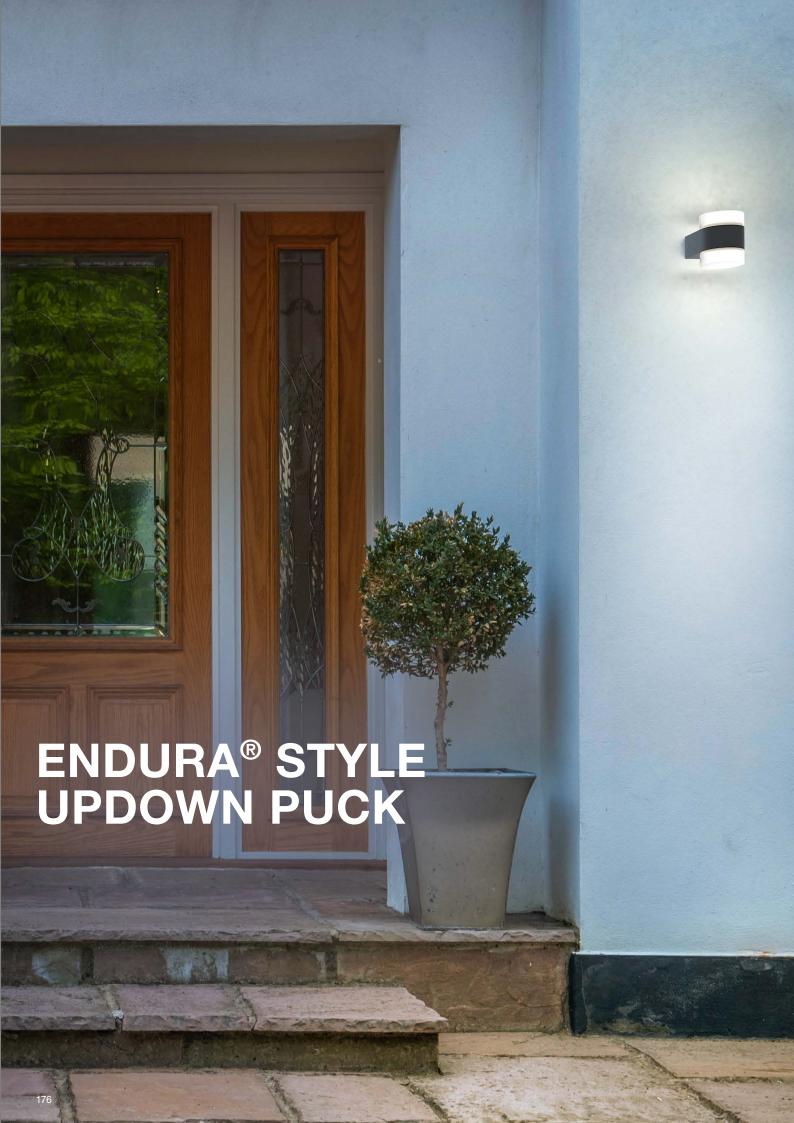























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	th 2	W	lm 3	Im ught source	K	CRI		IP
ENDUDA Chila IIa Davia Divala 40 W Davia Cons	4050075 005507		David annu	A1	00.000	10.5	000	1.450	0.000	. 00	110	ID44
ENDURA Style UpDown Puck 13W Dark Gray ENDURA Style UpDown Puck 13W White	4058075 205567 4058075 205581	1	Dark gray White	Aluminum Aluminum	30 000	12.5 12.5	980 980	1 450 1 450	3 000	≥ 80 ≥ 80	110	IP44


Product name		X O	MODULE NITEGRATED	CONNECTOR	ACCES- SORIES NELLIGIO	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Style UpDown Puck 13W Dark Gray	15 000	_	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	131	91	110	_	6
ENDURA Style UpDown Puck 13W White	15 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	131	91	110	-	6

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





























Product name	GTIN (EAN)	Q E No.	COLOR	MATERIAL	t [h] ²	W	Іт 3	Im ught source	K	CRI		IP
ENDURA Style Wall IP54 12W Dark Gray	4058075 214132	1	Dark gray	Aluminum	30 000	12.0	740	950	3 000	≥ 80	107	IP44
ENDURA Style Wall Sensor IP54 12W Dark Gray	4058075 214170	1	Dark gray	Aluminum	30 000	12.0	740	950	3 000	≥ 80	107	IP44

Product name		X O	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCUSOD	[mm]	(mm)	(h	Ø d [mm]	
ENDURA Style Wall IP54 12W Dark Gray	15 000	_	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	168	100	273	-	4
ENDURA Style Wall Sensor IP54 12W Dark Gray	15 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	168	100	273	-	4

^{* 4058075214170}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






Product colors



Product sizes (in mm)



ENDURA Style Wall Wide Sensor 12W Dark Gray

4058075**205666**





Aluminum

30 000

11.5

750

900

3 0 0 0

≥ 80

106

IP44

Product name		X ()	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NELLOZZO	[mm]	W	(h	Ø d [mm]	
ENDURA Style Wall Wide Sensor 12W Dark Gray	15000	-	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	118	176	212	-	4


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA Style Wide 12W Dark Gray	4058075 214019	1	Dark gray	Aluminum	30 000	12.0	530	1 220	3 000	> 80	115	IP44
ENDUDA Style Wide 12W White	4059075 214022	1	White	Aluminum	30,000	12.0	520	1 220	3 000	~ 80	115	IDAA

Product name		X P	LED MODULE NITEGRATED	COMMECTOR	ACCIS- SORIES INJUGO		W	(h	Ø d [mm]	
ENDURA Style Wide 12W Dark Gray	15 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	86	210	90	-	6
ENDURA Style Wide 12W White	15 000	_	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	86	210	90	_	6


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colors

























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t _[h] ²	W	оптрит 3	Im 4	K	CRI		IP
ENDURA Garden Flood Spike 10W 3000K	4058075 206847	1	Dark gray	Aluminum	25 000	10.0	800	820	3 000	≥ 80	120	IP65
ENDURA Garden Flood Spike 20W 3000K	4058075 206861	1	Dark gray	Aluminum	25 000	20.0	1700	1750	3 000	≥ 80	120	IP65

Product name		X PICL.	MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCLUDED	[mm]	W [mm]	(þ.	Ø d [mm]	
ENDURA Garden Flood Spike 10W 3000K	15 000	-	Not replaceable	Protective contact Plug type	Ground spike, Allen wrench	44	108	292	-	8
ENDURA Garden Flood Spike 20W 3000K	15 000	-	Not replaceable	Protective contact Plug type	Ground spike, Allen wrench	44	133	323		8

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






ENDURA GARDEN 9 DOTS



ENDURA GARDEN 18 DOTS




Product colors



























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA Garden 3 Dots Extension 3000K	4058075 478510	1	Clear	Plastic (PC)	25 000	2.1	160	210	3 000	≥ 80	33	IP65
ENDURA Garden 9 Dots 3000K	4058075 478411	2	Clear	Plastic (PC)	25 000	6.0	480	630	3 000	≥ 80	33	IP65
ENDURA Garden 18 Dots 3000K	4058075 478473	3	Clear	Plastic (PC)	25 000	12.0	850	1 260	3 000	≥ 80	33	IP65

Product name		X NCL.	MODULE NYEGHALID	CONNECTOR	ACCES- SORIES INCLUEED	[mm]	W	(h	Ø d [mm]		
ENDURA Garden 3 Dots Extension 3000K	12500	_	Not replaceable	Plug type C (EU)	Screws, Plastic dowels	_	23	96	23	4	
ENDURA Garden 9 Dots 3000K	12500	_	Not replaceable	Plug type C (EU)	Screws, Plastic dowels	-	23	96	23	4	
ENDURA Garden 18 Dots 3000K	12500	_	Not replaceable	Plug type C (EU)	Screws, Plastic dowels	_	23	96	23	4	

^{* 4058075478510}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser







^{* 4058075834842 | ** 4058075834804; 4058075834828; 4058075834866; 4058075834880}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



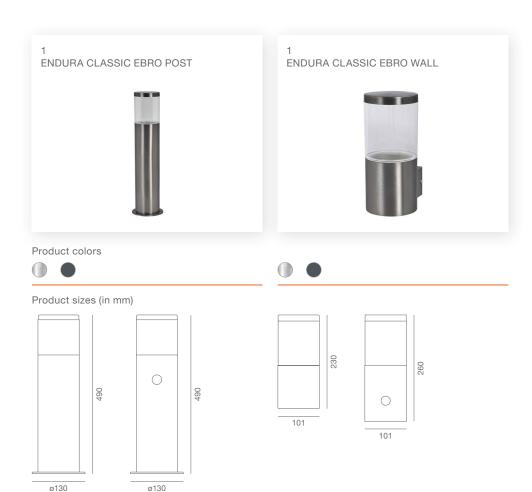



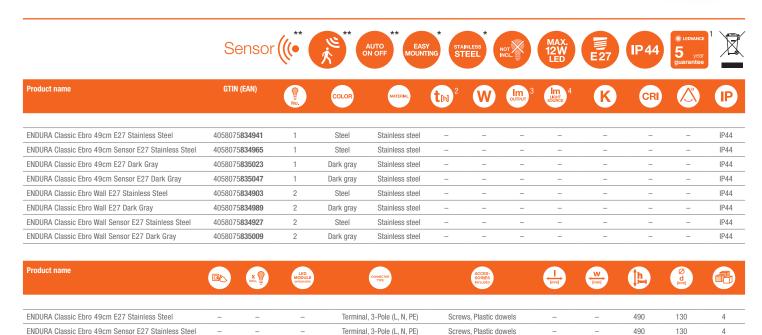

Terminal, 3-Pole (L, N, PE)

Terminal, 3-Pole (L. N. PE)

Terminal, 3-Pole (L, N, PE)

Screws, Plastic dowels

101

101

101

101

145

145

150

150

ENDURA Classic Ebro 49cm E27 Dark Gray

ENDURA Classic Ebro 49cm Sensor E27 Dark Gray

ENDURA Classic Ebro Wall Sensor E27 Stainless Steel

ENDURA Classic Ebro Wall Sensor E27 Dark Gray

ENDURA Classic Ebro Wall E27 Stainless Steel

ENDURA Classic Ebro Wall E27 Dark Gray

130

130

4

4

4

490

490

230

230


260


260

^{* 4058075834903; 4058075834941; 4058075834989; 4058075835023 | ** 4058075834927; 4058075834965; 4058075835009; 4058075835047}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



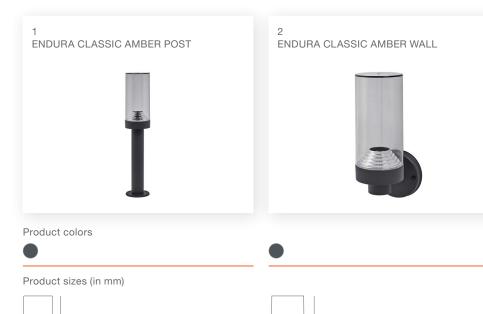



				A	LU	EASY JUNTING	NOT INCL.	MAX. 12W LED	E27	IP44	5 year guarantee	
Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	Іт 3	Im ught source	K	CRI		(IP
ENDURA Classic Amber 50cm E27 Dark Gray	4058075 835085	1	Dark gray	Aluminum	_	_		_	_	_		IP44
ENDURA Classic Amber Wall E27 Dark Gray	4058075 835061	2	Dark gray	Aluminum	-	-	-	-	-	-	-	IP44

Product name	X D	LED MODULE INTEGRATED	CORNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	(h.	Ø d [mm]	
ENDURA Classic Amber 50cm E27 Dark Gray	 		Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels			500	101	
ENDURA Classic Amber Wall E27 Dark Gray	 		Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	116	155	295	-	4

200

ø101

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser













Product sizes (in mm)





















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	th 2	W	Im 3	lm 4 source	K	CRI		P
ENDURA Classic Cascade Wall E27 Amber	4058075 554276	1	Dark gray	Aluminum		_						IP44
ENDURA Classic Cascade 50cm Post E27 Amber	4058075 554290	2	Dark gray	Aluminum	_	-	-	_	-	_	_	IP44
ENDURA Classic Cascade 80cm Post E27 Amber	4058075 554313	2	Dark gray	Aluminum	_	-	_	_	-	_	-	IP44

Product name		X PNCL.	LED MODULE WITEGRATED	ociescion Tyre	ACCES- SORIES NICLUSED	[mm]	W	(h	Ø d [mm]	a
ENDURA Classic Cascade Wall E27 Amber	_	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	160	120	180	-	4
ENDURA Classic Cascade 50cm Post E27 Amber	_	_	_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	200	160	500	_	2
ENDURA Classic Cascade 80cm Post E27 Amber	_	_	_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	200	160	800	_	2

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t M ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA Classic Cascade Wall E27 Clear	4058075 554337	1	Dark gray	Aluminum								IP44
ENDURA Classic Cascade 50cm Post E27 Clear	4058075 554351	2	Dark gray	Aluminum								IP44
ENDURA Classic Cascade 80cm Post E27 Clear	4058075 554375	2	Dark gray	Aluminum	-	-	-	-	-	-	-	IP44

Product name		X Proct.	MODULE NYTEOPATED	conscion five	ACCES- SORIES NICLUSED	[mm]	W	(h	Ø d [mm]	3
ENDURA Classic Cascade Wall E27 Clear	_	_	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	160	120	180	-	4
ENDURA Classic Cascade 50cm Post E27 Clear	-	-	_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	200	160	500	_	2
ENDURA Classic Cascade 80cm Post E27 Clear	-	_	_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	200	160	800	_	2

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	th) ²	W	Im 3	Im ught source	K	CRI		P
ENDURA Classic Frame 60cm Post E27	4058075 554412	1	Dark gray	Aluminum	-	-	-	-	-	-	-	IP44
ENDURA Classic Frame 80cm Post E27	4058075 554436	1	Dark gray	Aluminum	-	-	-	-	-	-	-	IP44
ENDURA Classic Frame Wall E27	4058075 554399	2	Dark gray	Aluminum	-	-	-	-	-	-	-	IP44

Product name		X NCL.	LED MODULE INTEGRATIO	COMMISTION	ACCES- SORIES PICLUSES	[mm]	W [mm]	Þ	Ø d [mm]	
ENDURA Classic Frame 60cm Post E27		-	_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	110	110	600	-	2
ENDURA Classic Frame 80cm Post E27	-	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	110	110	800	-	2
ENDURA Classic Frame Wall E27	_	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	140	110	245	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






































1

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t M ²	W	lm 3	Im 4	K	CRI		IP
ENDURA Classic Calice 50cm Post E27	4058075 477995	1	Steel	Stainless steel								IP44
ENDURA Classic Calice 80cm Post E27	4058075 478015	1	Steel	Stainless steel	_	-	-	_	-	_	-	IP44
ENDURA Classic Calice Wall E27	4058075 477957	2	Steel	Stainless steel	_	-	-	-	-	_	-	IP44
ENDURA Classic Calice Wall Sensor E27	4058075 477971	2	Steel	Stainless steel	-	-	-	-	-	-	-	IP44

Product name		NCL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCLUGED	[mm]	W	(h	Ø d [mm]	
ENDURA Classic Calice 50cm Post E27	_	_	_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	_	_	500	120	2
ENDURA Classic Calice 80cm Post E27	_	-	_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	_	_	800	120	2
ENDURA Classic Calice Wall E27	-	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	161	120	290	-	4
ENDURA Classic Calice Wall Sensor E27	_	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	161	120	305	-	4

^{* 4058075477971}


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



ENDURA CLASSIC TRADITION ALU POST 330



ENDURA CLASSIC TRADITION ALU DOWN WALL



Product colors










Product sizes (in mm)













Black/Gold















IP44

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA Classic Tradition 33cm E27 Gold	4058075 206342	1	Black/Gold	Aluminum			_	_	_	_	_	IP44
ENDURA Classic Tradition 1M E27 Gold	4058075 206380	2	Black/Gold	Aluminum	_	-	_	_	-	_	_	IP44
ENDURA Classic Tradition Down E27 Gold	4058075 206168	3	Black/Gold	Aluminum	-	-	-	-	-	-	-	IP44
ENDURA Classic Tradition Up E27 Gold	4058075 206229	4	Black/Gold	Aluminum	-	-	_	-	-	_	-	IP44

Aluminum

Product name		X PICL.	LED MODULE SITEGRATED	CONNECTOR	ACCES- SORIES NCLUSED	[mm]	(mm)	(h	Ø d [mm]	
ENDURA Classic Tradition 33cm E27 Gold	_	-	_	Screw terminal	Screws, Plastic dowels	170	170	325	_	4
ENDURA Classic Tradition 1M E27 Gold	_	_	-	Screw terminal	Screws, Plastic dowels, Base, Stand	170	170	1 000	_	4
ENDURA Classic Tradition Down E27 Gold	_	_	-	Screw terminal	Screws, Plastic dowels	230	170	230	_	4
ENDURA Classic Tradition Up E27 Gold	_	_	-	Screw terminal	Screws, Plastic dowels	230	170	260	_	4
ENDURA Classic Tradition Up Sensor E27 Gold	_	-	-	Screw terminal	Screws, Plastic dowels	230	170	280	-	4

4058075**206281**

ENDURA Classic Tradition Up Sensor E27 Gold

^{* 4058075206168; 4058075206229; 4058075206281; 4058075206380 | ** 4058075206342 | *** 4058075206380 | *** 4058075206281}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





ENDURA CLASSIC POST UP WALL




ENDURA CLASSIC POST DOWN WALL


Product colors

































ee	_


Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA Classic Post 55cm E27	4058075 206564	1	Steel	Stainless steel	_	-	-	-	-	_	-	IP44
ENDURA Classic Post 80cm E27	4058075 206588	1	Steel	Stainless steel	-	-	-	-	-	-	-	IP44
ENDURA Classic Post Up E27	4058075 206502	2	Steel	Stainless steel	-	-	-	-	-	_	-	IP44
ENDURA Classic Post Sensor Up E27	4058075 206540	2	Steel	Stainless steel	-	-	-	-	-	-	-	IP44
ENDURA Classic Post Down E27	4058075 206526	3	Steel	Stainless steel	_	-	-	-	-	_	-	IP44

Product name		X NCL.	LED MODULE STEGRATED	CONNECTOR	ACCES- SORES NOLLOSO		W [mm]	Þ	Ø d [mm]	
ENDURA Classic Post 55cm E27	_	-	-	Screw terminal	Screws, Plastic dowels	_	_	550	127	4
ENDURA Classic Post 80cm E27	_	_	-	Screw terminal	Screws, Plastic dowels	_	-	800	127	4
ENDURA Classic Post Up E27	_	-	-	Screw terminal	Screws, Plastic dowels	212	127	193	127	4
ENDURA Classic Post Sensor Up E27	_	-	-	Screw terminal	Screws, Plastic dowels	212	127	193	127	4
ENDURA Classic Post Down E27	_	-	-	Screw terminal	Screws, Plastic dowels	212	127	195	127	4

^{* 4058075206564 | ** 4058075206588 | *** 4058075206540}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



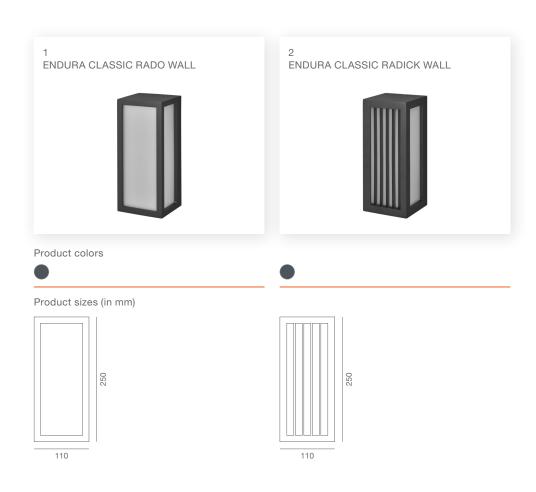





Product name		X Prot.	MODULE COMMENTS		ACCES- SORIES NCLUOID	[mm]	W [mm]	h	Ø d [mm]	
ENDURA Classic E27 IP65 Rado Wall Dark Gray	_	_	_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	110	102	250	_	4
ENDURA Classic E27 IP65 Radick Wall Dark Gray	-	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	110	108	250	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser









Product colors





Product sizes (in mm)





















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im UGHT SOURCE	K	CRI		IP
ENDURA Classic E27 IP65 Orbi Wall Dark Gray	4099854 182945	1	Dark gray	Aluminum		_	_	_	_		_	IP65
ENDURA Classic E27 IP65 Orbick Wall Dark Gray	4099854 182969	2	Dark gray	Aluminum	-	-	-	-	-	-	-	IP65

Product name		X Prot.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NOLLOZO	[mm]	W [mm]	(h.	Ø d [mm]	
ENDURA Classic E27 IP65 Orbi Wall Dark Gray	_	_	_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	200	90	290	_	4
ENDURA Classic E27 IP65 Orbick Wall Dark Gray	-	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	200	95	290	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser














Product name		X NCL.	LED MODULE INTEGRATED	CORRECTOR	ACCES- SORIES NOLLOCO	[mm]	W [mm]	(h.	Ø d [mm]	
ENDURA Classic E27 IP65 Cuadra Wall Dark Gray	-	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	260	88	120	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser












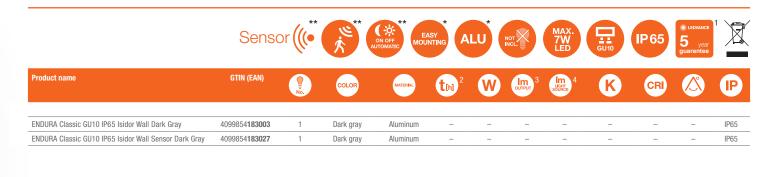

Product name	X MODULE MODULE STREET		ACCES- SORIES NOCLUDED	[mm]	W	[h]	Ø d [mm]			
ENDURA Classic GU10 IP65 Isidor Wall Dark Gray	-	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	60	88	170	-	4
ENDURA Classic GU10 IP65 Isidor Wall Sensor Dark Gray	-	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	60	88	170	-	4

^{* 4099854183003 | ** 4099854183027}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser









Product name		X PROL.	MODULE NTEGRATED	CONNECTOR	ACCES- SORIES NOLLED	[mm]	W [mm]	(h.	Ø d [mm]	
ENDURA Classic GU10 IP65 Itys Wall Dark Gray	_			Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	65	100	158	_	4
ENDURA Classic GU10 IP65 Ive Wall Dark Gray	_	_	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	65	100	176	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser
















Product sizes (in mm)





















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im 4	K	CRI		IP
ENDURA Classic Square Down Black	4058075 763623	1	Black	Aluminum	_	_		_	_			IP44
ENDURA Classic Square Down White	4058075 763661	1	White	Aluminum	_	-	_	-	-	_	-	IP44
ENDURA Classic Square UpDown Black	4058075 763647	2	Black	Aluminum	_	-	-	_	-	_	-	IP44
ENDURA Classic Square UpDown White	4058075 763685	2	White	Aluminum	-	-	-	-	-	-	-	IP44

Product name		X NCL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	(L)	Ø d [mm]	
ENDURA Classic Square Down Black	_	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	68	81	92	-	6
ENDURA Classic Square Down White	-	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	68	81	92	-	6
ENDURA Classic Square UpDown Black	-	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	68	150	92	-	6
ENDURA Classic Square UpDown White	-	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	68	150	92	-	6

^{* 4058075763623; 4058075763661 | ** 4058075763647; 4058075763685}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

ENDURA® CLASSIC SPOT SQUARE Designed for durability and versatile placement, our sleek square wall light is the perfect solution to illuminate your outdoor space with ease and precision! - Flexible use: Features a GX53 base for easy lamp replacement, accommodating up to 12W. Varied: With directional luminaire head to adjust the lighting

- to personal needs.
- Robust material: Constructed from high-quality aluminum with a durable plastic diffuser.
- Versatile: An ideal outdoor lighting solution for facades, garages, gardens, terraces, and entrance areas.
- IP44 protection: Designed for the outdoors, this light is moisture-proof, ensuring protection against splash water from all directions.





Product sizes (in mm)







Product name		X NCL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORES NCLUOTO	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Classic Spot Square Wall	_	_	_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	100	170	90	_	6

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



- lamp replacement and the option to install normal or smart
- Varied: Directional head provides focused lighting, easily adjustable to suit your needs.
- Robust material: Made with high-quality aluminum and a sleek cubic design that complements any exterior.
- Versatile: Suitable for a wide range of outdoor areas, including facades, garages, and entrance ways.
- IP44 protection: Designed for the outdoors, this light is moisture-proof, ensuring protection against splash water from all directions.









Product sizes (in mm)



















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t M ²	W	оптрит 3	ught source 4	K	CRI		IP
ENDURA Classic Cube Adjustable Wall Black	4058075 763562	1	Black	Aluminum	-	-	-	-	-	-	-	IP44
ENDURA Classic Cube Adjustable Wall Silver	4058075 763586	1	Silver	Aluminum	_	-	-	-	-	-	-	IP44
ENDURA Classic Cube Adjustable Wall White	4058075 763609	1	White	Aluminum	_	-	-	-	-	_	-	IP44

Product name		X Proces	LED MODULE INTEGRATED	CONSISTOR	ACCES- SORIES NCLUED	[mm]	W [mm]	Îp.	Ø d [mm]	
ENDURA Classic Cube Adjustable Wall Black	_	-	_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	66	93	100	-	6
ENDURA Classic Cube Adjustable Wall Silver	-	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	66	93	100	-	6
ENDURA Classic Cube Adjustable Wall White	_	_	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	66	93	100	-	6

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





















IP

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t _[h] ²	W	оптрит 3	Im ught source	K	CRI		IP
ENDURA Classic Rotary UpDown	4058075 763449	1	Dark gray	Aluminum/Steel	-	-	-	-	-	-	-	IP44

Product name		X PICL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NECLOSED	[mm]	(mm)	(h	Ø d [mm]	
ENDURA Classic Rotary UpDown	_	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	69	112	175	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser















Product name		X NCL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCLUOED	[mm]	(mm)	(h	Ø d [mm]	
ENDURA Classic Tubular Wall E27	_	_	_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	117	82	222	_	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser













Product sizes (in mm)



















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t M ²	W	lm 3	Im ught source	K	CRI	IP
ENDURA Classic Cannon Wall Up GU10	4058075 554474	1	Dork grov	Aluminum							IP44
ENDURA Classic Cannon Wall UpDown GU10	4058075 554498	2	Dark gray Dark gray	Aluminum							 IP44

Product name		X PROL. =	MODULE NTEGRATED	CONNECTOR TYPE	ACCES- SORIES PELLOSO		(mm)	(h	Ø d [mm]	
ENDURA Classic Cannon Wall Up GU10	_			Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	90	75	120		4
ENDURA Classic Cannon Wall UpDown GU10	-	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	105	75	180	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Terminal, 3-Pole (L, N, PE)

Screws, Plastic dowels, Allen wrench

104

104

104

104

92

92

92

92

Product name

ENDURA Classic Beam Wall Down GU10

ENDURA Classic Beam Gap Wall Down GU10

ENDURA Classic Beam Wall UpDown GU10

ENDURA Classic Beam Gap Wall UpDown GU10

Ød

(Î<u>h</u>

146

163

200

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser




























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t _[h] ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA Classic Lantern Cylinder E27 Wood	4058075 392625	1	Wood decor	Aluminum		_						IP43
ENDURA Classic Lantern Cylinder E27 White	4058075 392649	1	White	Aluminum	-	_	_	_	_	-	-	IP43
ENDURA Classic Lantern Cylinder E27 Black	4058075 392663	1	Black	Aluminum	_	_	_	_	_	_	_	IP43


Product name		X NCL.	LED MODULE INTEGRATED	CONNECTOR TYPE	ACCES- SORIES NCLUMED	[mm]	W	(h	Ø d [mm]	
ENDURA Classic Lantern Cylinder E27 Wood	_	_	_	Screw terminal	Screws, Plastic dowels	210	118	212	118	4
ENDURA Classic Lantern Cylinder E27 White	_	_	-	Screw terminal	Screws, Plastic dowels	210	118	212	118	4
ENDURA Classic Lantern Cylinder E27 Black	-	-	-	Screw terminal	Screws, Plastic dowels	210	118	212	118	4


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser
























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im UGHT SOURCE	K	CRI		IP
ENDURA Classic Lantern Square S E27	4058075 206625	1	Black	Aluminum		_			_		_	IP43
ENDURA Classic Lantern Square M E27	4058075 206649	1	Black	Aluminum	_	-	_	_	-	_	-	IP43

Product name		NCL.	LED MODULE SITEGRATED	CONNECTOR	ACCES- SORIES NELLIGID	[mm]	W	(h	Ø d [mm]	
ENDURA Classic Lantern Square S E27		_	_	_	Screws, Plastic dowels	105	150	225	_	6
ENDURA Classic Lantern Square M E27	_	_	-	-	Screws, Plastic dowels	105	150	293	-	6

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

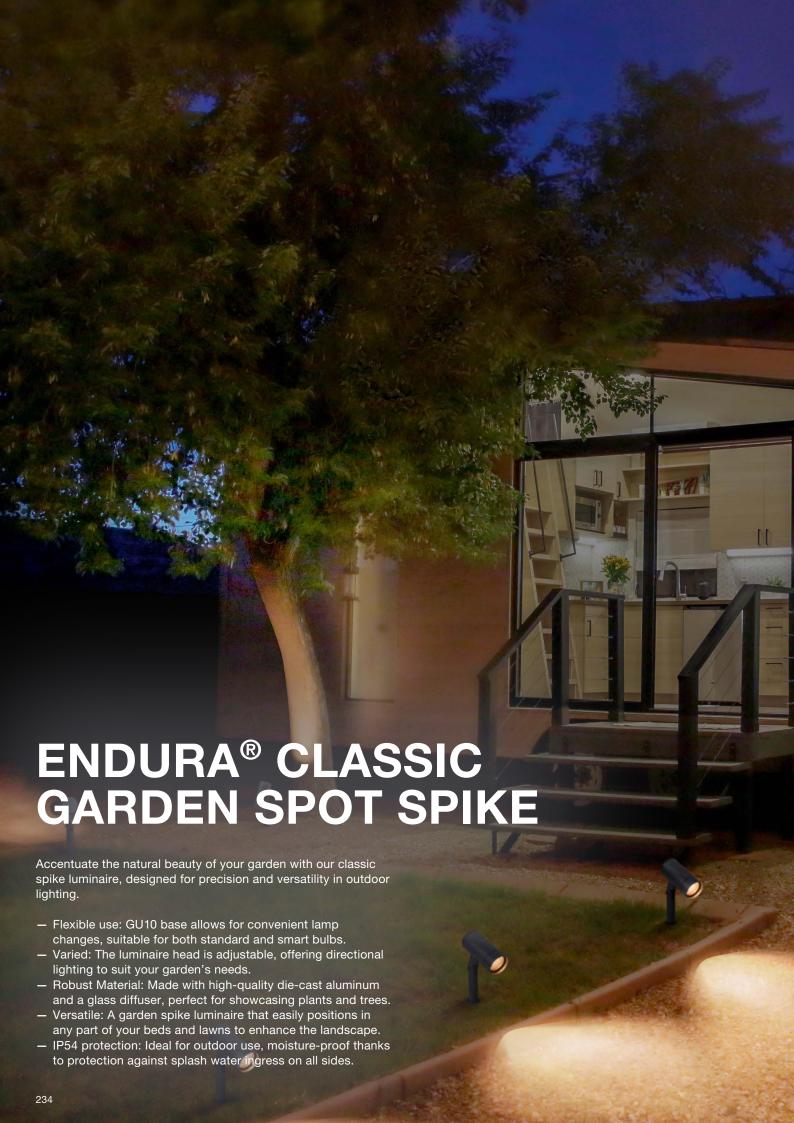





















ear tee	

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	оптрит 3	Im ught source	K	CRI	IP
ENDURA Classic Garden Snot Snike	4058075 763548		Dark gray	Δluminum							IDE 4

Product name		X Pinct.	LED MODULE SITEGRATED	CORRECTOR	ACCES- SORIES NCLUDED	[mm]	(mm)	(h	Ø d [mm]	
ENDURA Classic Garden Spot Spike	_	_	-	Plug type C (EU)	_	65	130	415	_	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



Illuminate your outdoor spaces with powerful precision with LEDVANCE FLOODLIGHTS, engineered to brighten the darkest corners with ease. Combining high performance lighting with a robust design, our floodlights are suitable for a wide range of outdoor applications, each ensuring a safe and well-lit environment.

The addition of SMART⁺ Floodlights within the range brings connectivity and convenience to the forefront, allowing seamless control over lighting intensity and schedules. With their easy installation, energy-efficient LEDs, durable materials, and advanced sensor technology, these lights are ideal for security, aesthetic spot lighting, and general outdoor illumination.

Designed with versatility in mind, our floodlights are available in a variety of beam angles and brightness levels, all with high IP ratings for excellent weather resistance. Step into a well-lit world of safety and visibility with LEDVANCE's extensive selection of floodlights.

To secure

Mark and Mark 1















Product sizes (in mm)

































≥ 80













works with	alexa	

Hey Google





















	_
Product name	

A STATE OF		•••	























SMART+ Wifi Floodlight 10W RGB + W	4058075 474604	1	Dark gray	Aluminum	30 000	10.0	800	820	3 000	≥ 80	100	IP65
SMART+ Wifi Floodlight 20W RGB + W	4058075 474628	1	Dark gray	Aluminum	30 000	20.0	1 600	1 640	3 000	≥ 80	100	IP65
SMART ⁺ Wifi Floodlight 30W RGB + W	4058075 474642	1	Dark gray	Aluminum	30 000	30.0	2 400	2500	3 000	≥ 80	100	IP65
SMART ⁺ Wifi Floodlight 50W RGB+W	4058075 831438	2	Black	Aluminum	30 000	50.0	3 000	3100	3 000	≥ 80	100	IP65
SMART ⁺ Wifi Floodlight 50 W DIM	4058075 474666	1	Dark gray	Aluminum	30 000	50.0	4000	4150	3 000	≥ 80	100	IP65
SMART ⁺ Wifi Floodlight 100W RGB+W	4058075 831452	3	Black	Aluminum	30 000	100.0	8 000	8 300	3 000	≥ 80	100	IP65

Product name		X NCL.	LED MODULE NYEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	(h.	Ø d [mm]	a
SMART ⁺ Wifi Floodlight 10W RGB + W	30 000	_	Not replaceable	Cable, 3-pole	Mounting screws, Plastic dowels	152	125	28	-	12
SMART ⁺ Wifi Floodlight 20W RGB + W	30 000	-	Not replaceable	Cable, 3-pole	Mounting screws, Plastic dowels	152	125	28	-	12
SMART ⁺ Wifi Floodlight 30W RGB + W	30 000	_	Not replaceable	Cable, 3-pole	Mounting screws, Plastic dowels	209	168	30	_	12
SMART ⁺ Wifi Floodlight 50W RGB+W	30 000	_	Not replaceable	Cable, 3-pole	Mounting screws, Plastic dowels	204	36	237	_	8
SMART ⁺ Wifi Floodlight 50 W DIM	30 000	_	Not replaceable	Cable, 3-pole	Mounting screws, Plastic dowels	237	200	36	_	8
SMART+ Wifi Floodlight 100W RGB+W	30 000	_	Not replaceable	Cable, 3-pole	Mounting screws, Plastic dowels	255	39	284	_	5

^{* 4058075474604; 4058075474628; 4058075474642; 4058075831438; 4058075831452 | ** 4058075474666 | *** 4058075831438; 4058075831452 | *** 4058075474604; 4058075474628; 4058075474642; 4058075474666}


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser
































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA PRO Flood Sensor 15W 4000K IP55 White	4058075 228788	1	White	Plastic (PC)	30 000	15.0	1 500	1 980	4000	_	100	IP55
ENDURA PRO Flood Sensor 15W 4000K IP55 Dark Gray	4058075 228801	1	Dark grey	Plastic (PC)	50 000	15.0	1 500	1 980	4000	-	100	IP55
ENDURA PRO Flood Sensor 27W 4000K IP55 White	4058075 228825	1	White	Plastic (PC)	50 000	27.0	3 000	3800	4000	-	100	IP55
ENDURA PRO Flood Sensor 27W 4000K IP55 Dark Gray	4058075 228849	1	Dark grey	Plastic (PC)	30 000	27.0	3 000	3800	4000	_	100	IP55

Product name		X P	MODULE MICGANIZO	COMMETTON	ACCES- SORIES INCLUEED		W [mm]	(h)	Ø d [mm]	
ENDURA PRO Flood Sensor 15W 4000K IP55 White	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	151	56	205	_	6
ENDURA PRO Flood Sensor 15W 4000K IP55 Dark Gray	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	151	56	205	-	6
ENDURA PRO Flood Sensor 27W 4000K IP55 White	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	201	56	225	_	4
ENDURA PRO Flood Sensor 27W 4000K IP55 Dark Gray	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	201	56	225	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser













Product sizes (in mm)



Product name







GTIN (EAN)





















ID	

		No.			CIM	W	OUTPUT	SOURCE	T.		VO	•
ENDURA PRO Spot Sensor 8W 4000K IP55 White	4058075 228863	1	White	Plastic (PC)	30 000	8.0	750	1 070	4000	-	50	IP55
ENDURA PRO Spot Sensor 8W 4000K IP55 Dark Gray	4058075 228887	1	Dark grey	Plastic (PC)	30 000	8.0	750	1 070	4000	-	50	IP55
ENDURA PRO Spot Sensor 16W 4000K IP55 White	4058075 228900	2	White	Plastic (PC)	30 000	16.0	1 500	2140	4000	-	50	IP55
ENDLIDA DDO Spot Sopeor 16W 4000K IDEE Dark Gray	4059075 229024	2	Dark grov	Plactic (PC)	30,000	16.0	1.500	2140	4.000		50	IDEE

Product name		X P	MODULE MITGUATED	CONNECTON	ACCES- SORIES INCLUDED		(mm)	(h	Ø d [mm]	
ENDURA PRO Spot Sensor 8W 4000K IP55 White	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	87	58	187	_	6
ENDURA PRO Spot Sensor 8W 4000K IP55 Dark Gray	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	87	58	187	-	6
ENDURA PRO Spot Sensor 16W 4000K IP55 White	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	177	58	187	-	6
ENDURA PRO Spot Sensor 16W 4000K IP55 Dark Gray	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	177	58	187	-	6

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






Product colors





























X

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	th) ²	W	lm 3	Im 4	K	CRI		IP
ENDURA PRO UpDown Sensor 10W 4000K IP55 White	4058075 228948	1	White	Plastic (PC)	30 000	10.0	1 000	1 360	4 000		60 ° x 85	IP55
ENDURA PRO UpDown Sensor 10W 4000K IP55 Dark Gray	4058075 228962	1	Dark grey	Plastic (PC)	30 000	10.0	1 000	1 360	4000		60 ° x 85	IP55

Product name		X ()	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORIES INCLUEDD	[mm]	W [mm]	(h.	Ø d [mm]	
ENDURA PRO UpDown Sensor 10W 4000K IP55 White	12500		Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	87	55	180		6
ENDURA PRO UpDown Sensor 10W 4000K IP55 Dark Gray	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	87	55	180	-	6

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser











Product sizes (in mm)













ENDURA Flood Sensor 50 W 3000 K WT





4058075**239739**





White













3 000



≥ 80

120

IP44



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im UGHT SOURCE	K	CRI		IP
ENDURA Flood Sensor 10 W 3000 K DG	4058075 292154	1	Dark gray	Aluminum	25 000	10.0	800	820	3 000	≥ 80	120	IP44
ENDURA Flood Sensor 10 W 3000 K WT	4058075 292178	1	White	Aluminum	25 000	10.0	800	820	3 000	≥ 80	120	IP44
ENDURA Flood Sensor 20 W 3000 K DG	4058075 239500	1	Dark gray	Aluminum	25 000	20.0	1700	1750	3 000	≥ 80	120	IP44
ENDURA Flood Sensor 20 W 3000 K WT	4058075 239692	1	White	Aluminum	25 000	20.0	1700	1750	3 000	≥ 80	120	IP44
ENDURA Flood Sensor 30 W 3000 K DG	4058075 239548	1	Dark gray	Aluminum	25 000	30.0	2700	2800	3 000	≥ 80	120	IP44
ENDURA Flood Sensor 30 W 3000 K WT	4058075 239715	1	White	Aluminum	25 000	30.0	2700	2800	3 000	≥ 80	120	IP44
ENDURA Flood Sensor 50 W 3000 K DG	4058075 239593	1	Dark gray	Aluminum	25 000	50.0	4500	4700	3 000	≥ 80	120	IP44

Aluminum

25 000

50.0

4500


	X NCL.	LED MODULE NTEGRATED	CONNECTOR TYPE	ACCES- SORIES NOLLOOD		W [mm]	(h	Ø d [mm]	6
15 000	_	Not replaceable	Cable, 3-pole	-	168	108	63	-	8
15 000	_	Not replaceable	Cable, 3-pole	-	168	108	63	_	8
15 000	_	Not replaceable	Cable, 3-pole	-	189	133	66	-	8
15 000	_	Not replaceable	Cable, 3-pole	-	189	133	66	-	8
15 000	_	Not replaceable	Cable, 3-pole	-	223	170	66	-	8
15 000	_	Not replaceable	Cable, 3-pole	-	223	170	66	-	8
15 000	_	Not replaceable	Cable, 3-pole	-	267	210	70	-	8
15 000	_	Not replaceable	Cable, 3-pole	-	267	210	70	-	8
	15 000 15 000 15 000 15 000 15 000 15 000 15 000	15000 - 15000 - 15000 - 15000 - 15000 - 15000 - 15000 -	15000	15000	15000	15000	15000 - Not replaceable Cable, 3-pole - 168 108 15000 - Not replaceable Cable, 3-pole - 168 108 15000 - Not replaceable Cable, 3-pole - 189 133 15000 - Not replaceable Cable, 3-pole - 189 133 15000 - Not replaceable Cable, 3-pole - 223 170 15000 - Not replaceable Cable, 3-pole - 223 170 15000 - Not replaceable Cable, 3-pole - 267 210	15000	15000

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser













































	' 7
	∕ ⊢•
Į	

		No.	COLOR	MATERIAL	Uhl	W	ОПТРИТ	SOURCE	K	CRI		IP
ENDURA Flood Sensor 10 W 4000 K DG	4058075 292192	1	Dark gray	Aluminum	25 000	10.0	800	820	4000	≥ 80	120	IP44
ENDURA Flood Sensor 20 W 4000 K DG	4058075 206748	1	Dark gray	Aluminum	25 000	20.0	1700	1750	4000	≥ 80	120	IP44
ENDURA Flood Sensor 30 W 4000 K DG	4058075 206762	1	Dark gray	Aluminum	25 000	30.0	2700	2800	4000	≥ 80	120	IP44
ENDURA Flood Sensor 50 W 4000 K DG	4058075 206786	1	Dark gray	Aluminum	25 000	50.0	4500	4700	4000	≥ 80	120	IP44

Product name		X NCL.	LED MODULE INTEGRATED	CONNECTOR TYPE	ACCES- SORIES NCLUDED	[mm]	(mm)	(h)	Ø d [mm]	
ENDURA Flood Sensor 10 W 4000 K DG	15 000	-	Not replaceable	Cable, 3-pole	-	168	108	63	-	8
ENDURA Flood Sensor 20 W 4000 K DG	15 000	-	Not replaceable	Cable, 3-pole	-	189	133	66	-	8
ENDURA Flood Sensor 30 W 4000 K DG	15 000	-	Not replaceable	Cable, 3-pole	-	223	170	66	-	8
ENDURA Flood Sensor 50 W 4000 K DG	15 000	_	Not replaceable	Cable, 3-pole	-	267	210	70	-	8

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser











Product sizes (in mm)

























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
Floodlight Essential 10W 4000K	4099854 094507	2	Black	Aluminum	25 000	10.0	900	950	4000	≥ 80	100	IP65
Floodlight Essential Sensor 20W 4000K	4099854 094545	1	Black	Aluminum	25 000	20.0	1 800	1 900	4000	≥ 80	100	IP65
Floodlight Essential 30W 4000K	4099854 094521	2	Black	Aluminum	25 000	30.0	2700	2850	4000	≥ 80	100	IP65

Product name		X NCL.	LED MODULE NYTEGRANIZO	CONNECTOR	ACCES- SORES MCLUDED	[mm]	(mm)	(h	Ø d [mm]	
Floodlight Essential 10W 4000K	25 000	-	Not replaceable	Cable, 3-pole	-	132	83	28	-	20
Floodlight Essential Sensor 20W 4000K	25 000	-	Not replaceable	Cable, 3-pole	-	173	111	33	-	15
Floodlight Essential 30W 4000K	25 000	-	Not replaceable	Cable, 3-pole	_	186	128	28	-	15

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	Im 3	Im LIGHT SOURCE	K	CRI
Floodlight Essential Sensor 10W 3000K	4058075 768178	1	Black	Aluminum	25 000	10.0	750	900	3 000	≥ 80
Floodlight Essential Sensor 10W 4000K	4058075 768215	1	Black	Aluminum	25 000	10.0	900	950	4000	≥ 80
Floodlight Essential Sensor 10W 6500K	4058075 768239	1	Black	Aluminum	25 000	10.0	900	950	6 500	≥ 80
Floodlight Essential Sensor 20W 3000K	4058075 768253	1	Black	Aluminum	25 000	20.0	1 600	1 800	3 000	≥ 80
Floodlight Essential Sensor 20W 4000K	4058075 768277	1	Black	Aluminum	25 000	20.0	1 800	1 900	4000	≥ 80
Floodlight Essential Sensor 20W 6500K	4058075 768291	1	Black	Aluminum	25 000	20.0	1 800	1 900	6 500	≥ 80
Floodlight Essential Sensor 30W 3000K	4058075 768314	1	Black	Aluminum	25 000	30.0	2550	2700	3 000	≥ 80
Floodlight Essential Sensor 30W 4000K	4058075 768338	1	Black	Aluminum	25 000	30.0	2700	2850	4000	≥ 80
Floodlight Essential Sensor 30W 6500K	4058075 768352	1	Black	Aluminum	25 000	30.0	2700	2850	6 500	≥ 80
Floodlight Essential Sensor 50W 3000K	4058075 768376	1	Black	Aluminum	25 000	50.0	4250	4500	3 000	≥ 80
Floodlight Essential Sensor 50W 4000K	4058075 768390	1	Black	Aluminum	25 000	50.0	4500	4750	4000	≥ 80
Floodlight Essential Sensor 50W 6500K	4058075 768413	1	Black	Aluminum	25 000	50.0	4500	4750	6 500	≥ 80
Floodlight Essential Sensor 100W 4000K	4058075 831599	2	Black	Aluminum	25 000	100.0	10 000	11 500	4000	≥ 80
Floodlight Essential Sensor 150W 4000K	4058075 831612	2	Black	Aluminum	25 000	150.0	15 000	17 000	4000	≥ 80
Floodlight Essential Sensor 200W 4000K	4058075 831636	2	Black	Aluminum	25 000	200.0	20 000	22 500	4000	≥ 80

^{4058075768215; 4058075768277; 4058075768338; 4058075768390; 4058075831599; 4058075831612; 4058075831636}

** 4058075768178; 4058075768253; 4058075768314; 4058075768376 | *** 4058075768239; 4058075768291; 4058075768291; 4058075768352; 4058075768314; 4058075768376; 4058075768390; 4058075768291; 4058075768291; 4058075768291; 4058075768291; 4058075768291; 4058075768291; 4058075768291; 4058075768291; 4058075768291; 4058075768390


^{***** 4058075831599; 4058075831612; 4058075831636}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser

⁴ Total luminous flux of the contained light sources without the diffuse





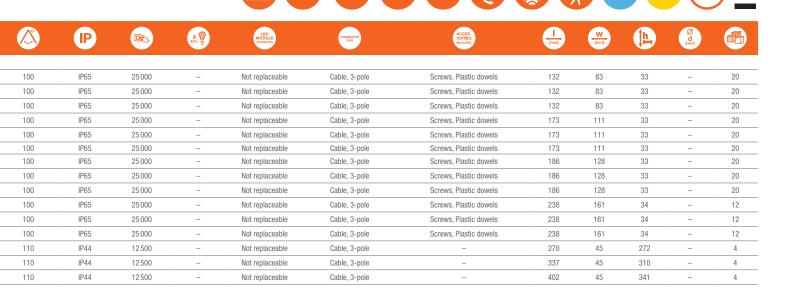

LED

IP 65







































X

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI	Å	IP
ENDURA Flood 10 W 3000 K DG	4058075 237926	1	Dark gray	Aluminum	25 000	10.0	800	820	3 000	≥ 80	120	IP65
ENDURA Flood 10 W 3000 K WT	4058075 239616	1	White	Aluminum	25 000	10.0	800	820	3 000	≥ 80	120	IP65
ENDURA Flood 20 W 3000 K DG	4058075 237940	1	Dark gray	Aluminum	25 000	20.0	1 700	1 750	3 000	≥ 80	120	IP65
ENDURA Flood 20 W 3000 K WT	4058075 239630	1	White	Aluminum	25 000	20.0	1 700	1 750	3 000	≥ 80	120	IP65
ENDURA Flood 30 W 3000 K DG	4058075 237964	1	Dark gray	Aluminum	25 000	30.0	2700	2800	3 000	≥ 80	120	IP65
ENDURA Flood 30 W 3000 K WT	4058075 239654	1	White	Aluminum	2500080	30.0	2700	2800	3 000	≥ 80	120	IP65
ENDURA Flood 50 W 3000 K DG	4058075 239340	1	Dark gray	Aluminum	25 000	50.0	4500	4700	3 000	≥ 80	120	IP65
ENDURA Flood 50 W 3000 K WT	4058075 239678	1	White	Aluminum	25 000	50.0	4500	4700	3 000	≥ 80	120	IP65

Product name		X NCL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NOLLOED	[mm]	(mm)	(h)	Ø d [mm]	a
ENDURA Flood 10 W 3000 K DG	15 000	-	Not replaceable	Cable, 3-pole	-	122	108	33	-	12
ENDURA Flood 10 W 3000 K WT	15 000	-	Not replaceable	Cable, 3-pole	-	122	108	33	-	12
ENDURA Flood 20 W 3000 K DG	15 000	-	Not replaceable	Cable, 3-pole	-	153	133	34	-	12
ENDURA Flood 20 W 3000 K WT	15 000	-	Not replaceable	Cable, 3-pole	-	153	133	34	-	12
ENDURA Flood 30 W 3000 K DG	15 000	-	Not replaceable	Cable, 3-pole	-	193	170	39	-	12
ENDURA Flood 30 W 3000 K WT	15 000	-	Not replaceable	Cable, 3-pole	-	193	170	39	-	12
ENDURA Flood 50 W 3000 K DG	100 000	-	Not replaceable	Cable, 3-pole	-	245	210	43	-	8
ENDURA Flood 50 W 3000 K WT	15 000	-	Not replaceable	Cable, 3-pole	-	245	210	43	-	8

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser







153

193

245

356

421

133

170

210

34

39

43

70

								_		1 **		1 *\
		LED [URNABLE	ALU IP	MODI INTEGR	ULE .	ROTA- TABLE	1m	COOL LIGHT	year year year	3 year quarantee	T. Z
Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t _M ²	W	оптрит 3	ught source	K	CRI		IP
ENDURA Flood 10 W 4000 K DG	4058075 206663	1	Dark gray	Aluminum	25 000	10.0	800	820	4000	≥ 80	120	IP65
ENDURA Flood 20 W 4000 K DG	4058075 206687	1	Dark gray	Aluminum	25 000	20.0	1700	1 750	4000	≥ 80	120	IP65
ENDURA Flood 30 W 4000 K DG	4058075 206700	1	Dark gray	Aluminum	25 000	30.0	2700	2800	4000	≥ 80	120	IP65
ENDURA Flood 50 W 4000 K DG	4058075 206724	1	Dark gray	Aluminum	25 000	50.0	4500	4700	4000	≥ 80	120	IP65
ENDURA Flood 100 W 4000 K DG	4058075 206809	2	Dark gray	Aluminum	25 000	100.0	8 800	11 800	4000	≥ 80	120	IP65
ENDURA Flood 150 W 4000 K DG	4058075 206823	2	Dark gray	Aluminum	25 000	150.0	13 200	17 200	4000	≥ 80	120	IP65
Product name	X NCL.	LED MODULE RYEGRATED		COMMECTOR		ACCE SORI NGLUI	ES- JES DED	[mr	w [mm]	(h	Ø d [mm]	
ENDURA Flood 10 W 4000 K DG	15 000 —	Not replacea	able	Cable, 3-pole				12	2 108	33	_	12

Cable, 3-pole

Cable, 3-pole

Cable, 3-pole

Cable, 3-pole

Cable, 3-pole

15000

15000

15000

15000

15000

Not replaceable

Not replaceable

Not replaceable

Not replaceable

Not replaceable

ENDURA Flood 20 W 4000 K DG

ENDURA Flood 30 W 4000 K DG

ENDURA Flood 50 W 4000 K DG

ENDURA Flood 100 W 4000 K DG

ENDURA Flood 150 W 4000 K DG

12

12

8

^{* 4058075206663; 4058075206687; 4058075206700; 4058075206724 | ** 4058075206809; 4058075206823}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t _[h] ²	W	Іт 3	lm LIGHT SOURCE	K	CRI
Floodlight Essential 10W 3000K	4058075 767911	1	Black	Aluminum	25 000	10.0	750	900	3 000	≥ 80
Floodlight Essential 10W 4000K	4058075 767935	1	Black	Aluminum	25 000	10.0	900	950	4000	≥ 80
Floodlight Essential 10W 6500K	4058075 767973	1	Black	Aluminum	25 000	10.0	900	950	6 500	≥ 80
Floodlight Essential 20W 3000K	4058075 767997	1	Black	Aluminum	25 000	20.0	1 600	1 800	3 000	≥ 80
Floodlight Essential 20W 4000K	4058075 768017	1	Black	Aluminum	25 000	20.0	1 800	1 900	4000	≥ 80
Floodlight Essential 20W 6500K	4058075 768031	1	Black	Aluminum	25 000	20.0	1 800	1 900	6 500	≥ 80
Floodlight Essential 30W 3000K	4058075 768055	1	Black	Aluminum	25 000	30.0	2550	2700	3 000	≥ 80
Floodlight Essential 30W 4000K	4058075 768079	1	Black	Aluminum	25 000	30.0	2700	2850	4000	≥ 80
Floodlight Essential 30W 6500K	4058075 768093	1	Black	Aluminum	25 000	30.0	2700	2850	6 500	≥ 80
Floodlight Essential 50W 3000K	4058075 768116	1	Black	Aluminum	25 000	50.0	4250	4500	3 000	≥ 80
Floodlight Essential 50W 4000K	4058075 768130	1	Black	Aluminum	25 000	50.0	4500	4750	4000	≥ 80
Floodlight Essential 50W 6500K	4058075 768154	1	Black	Aluminum	25 000	50.0	4500	4750	6 500	≥ 80
Floodlight Essential 100W 4000K	4058075 831476	2	Black	Aluminum	25 000	100.0	10 000	11 500	4000	≥ 80
Floodlight Essential 150W 4000K	4058075 831490	2	Black	Aluminum	25 000	150.0	15 000	17 000	4000	≥ 80
Floodlight Essential 200W 4000K	4058075 831513	2	Black	Aluminum	25 000	200.0	20 000	22 500	4000	≥ 80

^{* 4058075767935; 4058075768017; 4058075768079; 4058075768130; 4058075768130; 4058075768130; 4058075768131 | ** 4058075767973; 4058075768031; 4058075768031; 4058075768031; 4058075768130;} ***** 4058075831476; 4058075831490; 4058075831513

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



















	IP		X NCL =	MODULE NTEGRATED	CONNECTOR	ACCES- SORIES NOLLOED	[mm]	W [mm]	(h	Ø d [mm]	
100	IP65	25 000	-	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	132	83	28	-	20
100	IP65	25 000	-	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	132	83	28	-	20
100	IP65	25 000	_	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	132	83	28	-	20
100	IP65	25 000	-	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	173	111	28	-	20
100	IP65	25 000	-	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	173	111	28	-	20
100	IP65	25 000	-	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	173	111	28	-	20
100	IP65	25 000	-	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	186	128	28	-	20
100	IP65	25 000	-	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	186	128	28	-	20
100	IP65	25 000	-	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	186	128	28	-	20
100	IP65	25 000	-	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	238	161	30	-	12
100	IP65	25 000	-	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	238	161	30	-	12
100	IP65	25 000	-	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	238	161	30	-	12
110	IP65	12500	-	Not replaceable	Cable, 3-pole	-	270	30	222	-	4
110	IP65	12500	-	Not replaceable	Cable, 3-pole	-	337	31	263	-	4
110	IP65	12500	-	Not replaceable	Cable, 3-pole	-	402	31	291	-	4

.767997; 4058075768055; 4058075768116 | .31476; 4058075831513 |

CAMERA LUMINAIRES

Combining the inviting warmth of outdoor lighting with advanced surveillance technology, our range of camera-equipped luminaires offers a greater sense of security and convenience. Each unit is designed to provide not only lighting, but also vigilance, with integrated cameras and speakers that detect and follow human movement while ignoring unrelated disturbances.

Enjoy the ease of smart control with the LEDVANCE SMART⁺ app, which allows you to manage your lighting and security from any Android or iOS device. These energy-efficient and long-lasting camera luminaires offer reliability and sustainability.

Built to last, with IP44 rated durability, they're equipped to handle wet conditions in outdoor areas such as entrances and facades. Choose from a variety of designs, from the ambient glow of security luminaires to the precision of floodlights, all enhancing your outdoor spaces with smart, sophisticated technology.













Product name		X PICL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES MILLIOTO	[mm]	(mm)	(h	Ø d [mm]	
SMART ⁺ WIFI Cloud Camera	12500		Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	100	80	252	_	2

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



app, compatible with both Android and iOS devices. Greater feeling of security: Built-in camera and speaker with an extensive 8m and 180° sensor range, offering multiple


IP44 protection: Engineered for outdoor environments such as house entrances, providing robust protection against

storage options for recorded content.

water splashes from all directions.













Product name		X NCL.	MODULE NTEGRATED	CONNECTOR	ACCES- SORIES PICLUOID	[mm]	W	h	Ø d [mm]	
SMART ⁺ WIFI Globe Camera Track & Trace	-	_	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	175	198	314	-	2

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser


SMART⁺ WIFI CAMERA MULTI SPOT Combining targeted illumination with vigilant security, our dual-head LED wall luminaire illuminates your outdoor space with dynamic flexibility. Varied: Two adjustable heads provide targeted lighting with a warm white LED glow (3000K), ensuring key areas are Greater feeling of security: Includes a camera and speaker with a 10m and 90° detection range, with options to save footage on a memory card or cloud. - Smart control: Fully controllable via the LEDVANCE SMART $^{+}$

app, compatible with both Android and iOS devices. Energy-efficient: Crafted with an aluminum housing for long-lasting use, up to 30,000 hours, while saving energy. IP44 protection: Engineered for outdoor environments such as house entrances, providing robust protection against

water splashes from all directions.











Product name		X P	LED MODULE STEGRATED	CORRECTOR TYPE	ACCES- SORIES NCLUODD	[mm]	(mm)	(h	Ø d [mm]	
SMART ⁺ Wifi Camera Multi Spot	100 000	_	Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	250	130	135	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser




- Pleasant light: The built-in LED module with warm white illumination (3000K) ensures good brightness with a pleasant light color outdoors.
- Greater feeling of security: Equipped with a camera and speaker, offering a sensor detection range up to 5m and 340° for comprehensive coverage. Recordings can be saved to a memory card or the cloud.
- Smart control: Fully controllable via the LEDVANCE SMART⁺ app, compatible with both Android and iOS devices.
- Energy-efficient: Durable aluminum housing and polycarbonate diffuser for a long-lasting life of up to 30,000 hours, providing energy-saving benefits.
- IP44 protection: Perfect for facade lighting, especially in entrance areas, with an IP44 rating to ensure protection against contact and splashing water.



Product colors









Product name		X PICL.	LED MODULE INTEGRATED	CORRECTOR	ACCES- SORIES MCLUOED	[mm]	W [mm]	<u>h</u>	Ø d [mm]	
SMART ⁺ Wifi Circle Camera Control	100 000	_	Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	-	_	112	280	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser














Product name		X Poct.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SOMES NCLUDED	[mm]	(mm)	(h	Ø d [mm]	
SMART ⁺ Wifi Camera Entrance Number	100 000	_	Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels, Allen wrench	180	73	280	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser














Product name		X O	MODULE NTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	(mm)	ţ <u>h</u>	Ø d [mm]	
SMART ⁺ Wifi Camera Round	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	105		105	180	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser














Product name	IP		X DINGL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCLUDED	[mm]	(mm)	(h	Ø d [mm]	
CMADT Wiff Wall Comove Control	ID44	10.500		Not vonlessable	Torminal 2 Pala / N DE	Caraura Plantia davuala	100	00	220		4
SMART ⁺ Wifi Wall Camera Control	IP44	12500		Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	120	80	320		4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser













Product name	IP		X ()	LED MODULE INTEGRATED	CONNECTOR TYPE	ACCES- SORIES NCLUDED	[mm]	W [mm]	(h	Ø d [mm]	
SMART ⁺ Wifi Flood Camera Control	IP44	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	200	197	262	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser









ATTRACTIVE SHELF DESIGN

A shelf full of choices. Experience our wide range of durable, customizable outdoor lighting options for every need, presented with built-in viewing examples.














COMPACT DISPLAYS

Appealing, informative and compact. Our eye-catching outdoor luminaire displays offer a premium presentation perfectly designed to efficiently showcase the diverse range of outdoor lighting solutions.

SYMBOLS IN THE TABLES

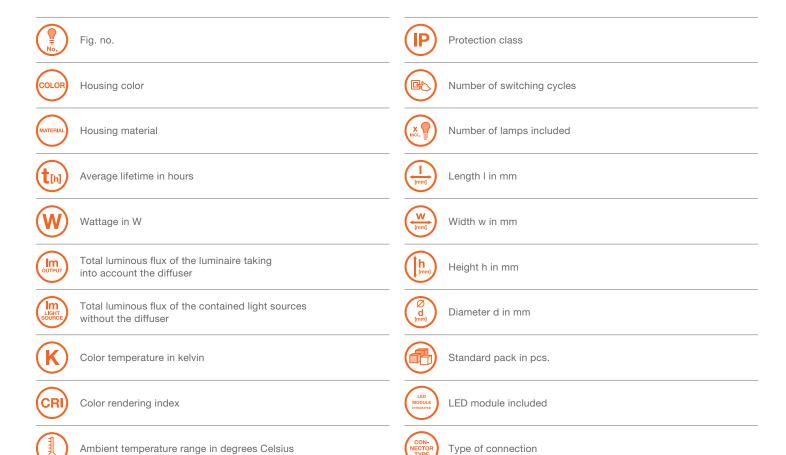

PRODUCT-SPECIFIC SYMBOLS

Beam angle in degrees °



PRODUCT-SPECIFIC SYMBOLS

SMART⁺ App

Adjustable light temperature



Open cable, 1 m in length

Magnetic mounting

Turnable light

household waste

Do not throw away with

Sensor

PRODUCT-SPECIFIC SYMBOLS



110120



ABOUT LEDVANCE

With offices in more than 50 countries and business activities in more than 140 countries, LEDVANCE is one of the world's leading general lighting providers for professional users and end consumers. Having emerged from the general lighting business of OSRAM GmbH, LEDVANCE offers a wide-ranging assortment of LED luminaires for a broad spectrum of application areas, intelligent lighting products for Smart Homes and Buildings, one of the largest LED lamps portfolios in the industry as well as traditional light sources.

LEDVANCE GmbH Parkring 1-5 85748 Garching Germany

Customer Service Centre: kundenservice.retail@ledvance.com

Germany: Phone: +49 89 780673-670