

LEDVANCE.COM

ROBUST  
**IP65**  
**IK10**

Multi  
Colour  
3000 K  
4000 K

**5Y**  
GUARANTEE

**LEDVANCE**

VERSATILE LUMINAIRE IN MULTIPLE  
VERSIONS WITH ADJUSTABLE  
MULTI SELECT FEATURES

# BULKHEAD COMPACT RECTANGULAR

NEW ROBUST IP65 LUMINAIRE FOR  
PORCH LIGHTING AND STAIRWAYS



# BULKHEAD COMPACT RECTANGULAR

VALUE  
CLASS



## VERSATILY AT ITS BEST

**EFFICIENT, FLEXIBLE AND DURABLE FOR  
INDOOR AND OUTDOOR APPLICATIONS**

LEDVANCE BULKHEAD RC offers unique flexibility thanks to Multi Select: the colour temperature (Multi Colour – MC) is adjustable to 3000 K and 4000 K. In addition, the power is selectable (Multi Lumen – ML) on the driver, making the luminous flux adjustable in 3 steps, from 500 to a maximum of 840 lumens. With a high IP65 rating, this product is perfect for use in dusty and damp areas, while its high IK10 rating ensures that it can withstand vandalism and rough handling. This makes it ideal for installation in public areas such as porches, hallways, stairwells, passageways and underpasses. The housing (white or black) and cover are made of UV-resistant PC. The fixture is designed for easy installation with multiple mounting patterns and plug-in terminals for tool-free connection.



- + **ROBUST:** IP65 and IK10 for optimized protection
- + **MULTI SELECT:** Adjustable luminous flux and colour temperature
- + **VERSATILE:** Available in On/Off, Sensor, Emergency, and Sensor / Emergency versions\*
- + **HIGH QUALITY:** ENEC certification, 5-year warranty

\* EM and EM Sensor types coming soon


## BREAKDOWN OF THE MAIN BULKHEAD RC BENEFITS



- 1 Housing made of UV resistant PC
- 2 Designed with multiple installation patterns and plug-in terminals for quick mounting (included)
- 3 Quick connector for fast mounting
- 4 Sensor versions with adjustable dip switches for daylight, burn time and detection area
- 5 Knockouts on both short sides




### WOULD YOU LIKE MORE INFORMATION?



Visit our website  
to discover more  
about our products  
and services.  
[ledvance.com](http://ledvance.com)

Does your project require something not  
shown? LEDVANCE Project Services can  
create lighting solutions to fit your specific  
needs. Get in touch:  
[contact@ledvance.com](mailto:contact@ledvance.com)

### 2 HOUSING COLOURS (BLACK OR WHITE)

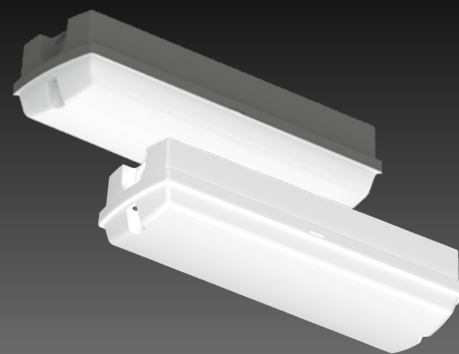

## MULTI SELECT: LESS COMPLEXITY, MORE FLEXIBILITY

Our new Multi Lumen feature allows installers to set the desired lumen output in three steps prior to installation. Multi Colour also allows the color temperature to be adjusted to 3,000 K or 4,000 K. This reduces the complexity of product selection, as fewer product EAN's are now required to meet the installers' needs. These simple settings are done with a DIP switch on the driver inside the luminaire.

### BENEFITS:

- Simplified product selection
- Flexible setup before installation
- Simple operation
- Proven quality



Our **MULTI SELECT** luminaires offer a practical  
and efficient solution for lighting up your projects.




# LEDVANCE

## ABOUT LEDVANCE

With business activities in over 140 countries, LEDVANCE is one of the world's leading general lighting companies. Emerging from OSRAM's general lighting division, LEDVANCE's portfolio includes LED lamps and luminaires, intelligent lighting products, traditional lamps and renewable energy solutions.  
#POWERTHROUGHLIGHT

LEDVANCE GmbH  
Parking 1-5  
85748 Garching  
Germany

## SURFACE BULKHEAD RC

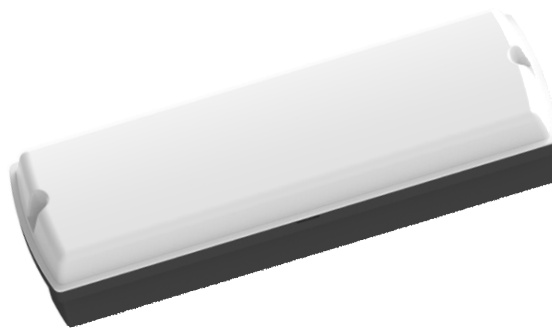

VALUE  
CLASS

Product name

GTIN (EAN)

lm

W

lm/W

K

L70<sup>1</sup>



L x W x H [mm]

### BULKHEAD COMPACT RC (RECTANGULAR)



BULKHEAD COMPACT RC V 8W MS IP65 BK	4099854290480	500/690/840	1x13W CFLi	100	3000/4000	50000	125	356 x 115 x 80
BULKHEAD COMPACT RC V 8W MS IP65 WT	4099854290503	500/690/840	1x13W CFLi	100	3000/4000	50000	125	356 x 115 x 80
BULKHEAD COMPACT RC SEN V 8W MS IP65 BK	4099854290527	500/690/840	1x13W CFLi	100	3000/4000	50000	125	356 x 115 x 80
BULKHEAD COMPACT RC SEN V 8W MS IP65 WT	4099854290602	500/690/840	1x13W CFLi	100	3000/4000	50000	125	356 x 115 x 80

### BULKHEAD COMPACT SENSOR

ON OFF 1 2 3 4 5 6 7 8

Daylight Sensor


1	2	3	
ON	ON	ON	2LUX
-	ON	ON	10LUX
-	ON	-	30LUX
-	-	ON	50LUX
-	-	-	Disable

Hold Time

4	5	6	
ON	ON	ON	5s
ON	ON	-	30s
ON	-	ON	90s
ON	-	-	5min
-	ON	ON	20min
-	-	-	30min

Detection Area

7	8	
ON	ON	100%
ON	-	75%
-	ON	50%
-	-	25%

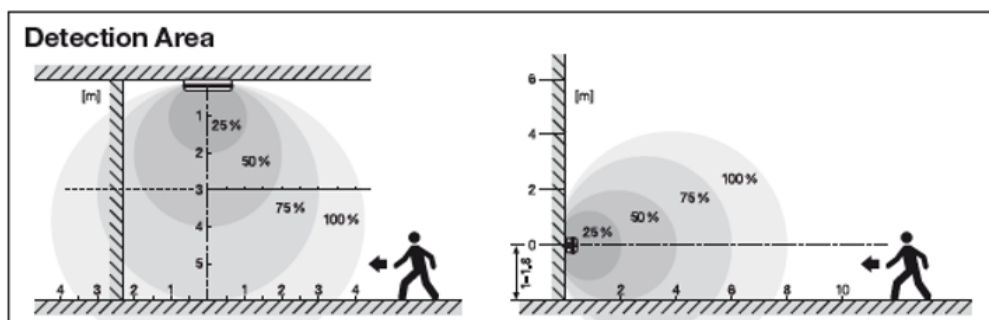

<sup>1</sup> t[h]: L70/B50 @ 25 °C (T<sub>a</sub>)

<sup>2</sup> Refer to [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee) for precise conditions

LEDVANCE.COM