




## Spectrum Test Report

Sample : Date : 2024-10-23 10:42:42  
Specification : CYLINDPS030UNHD8SC2R6BZP Min 400(Sam. Status) :  
Sample No. : Standard : LM-79-19  
Manufacturer : LEDVANCE LLC Instrument : HaasSuite(EVERFINE)  
Remark : Test by : Alan Wang

### Test Condition

Temperature : 25.3Deg RH : 65.0%  
WL Range : 380nm-780nm IP : 51012 (78%)  
Test Mode : Accuracy Test T : 1345 ms

**Spectrum** : Low

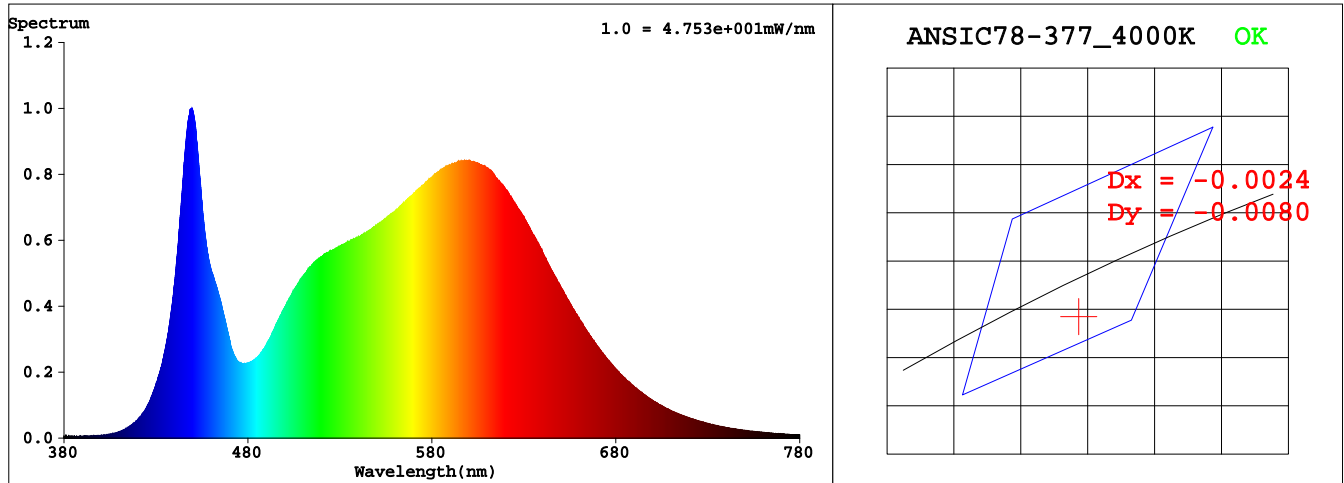

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.3825$   $y = 0.3715$  /  $u' = 0.2286$   $v' = 0.4996$  ( $duv = -3.07e-03$ )

CCT= 3902K Prcp WL:  $L_d = 581.2nm$  Purity=26.3%

Peak WL:  $L_p = 450nm$  FWHM:  $=20.0nm$  Ratio:R=19.2% G=77.2% B=3.5%

Render Index:  $R_a = 85.3$  AvgR = 79.8 TM30:Rf=85 Rg=98

EEL: 0.09247 A++ Highest

R1 =85 R2 =91 R3 =95 R4 =85 R5 =85 R6 =87 R7 =87

R8 =68 R9 =20 R10=78 R11=85 R12=68 R13=86 R14=97 R15=80

### Photometric & Radiometric Parameters

Flux = 2159.5 lm Eff. : 140.32 lm/W Fe = 7.0463 W

### Electrical parameters

V = 120.00 V I = 0.1286 A P = 15.39 W PF = 0.9973 F=60.00 Hz

### Dongguan New Testing Centre Co., Ltd

3F, No. 1 the 1st North Industry Road, Songshan Lake Science & Technology Park, Dongguan, Guangdong, China