

PRODUCT DATASHEET

PL PFM 1200x300 DALI 30 W 3000 K UGR19

PANEL PERFORMANCE 1200X300 UGR < 19 DALI | Rectangular recessed panel luminaires, tool-free installation and low glare, for 1200 x 300 mm ceiling systems with DALI-2 IoT technology



Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, conference rooms
- Reception areas, foyers, corridors, elevators
- Suitable for recessed ceiling systems with grid size of 300 x 1200 mm

Product benefits

- Suitable luminaire for VIVARES and other DALI-2 Light Management Systems
- Tool-free electrical connection due to push button connector
- Through-wiring possible with included connector box
- Energy savings thanks to high system efficacy: up to 120 lm/W
- Good glare reduction (UGR < 19)
- Comfortable light and high color consistency
- External driver for extended flexibility and easy installation
- Low flicker light thanks to special electronic control gear
- 5 years guarantee

Product features

- IoT-ready luminaire with DALI-2 technology
- Extruded aluminum frame
- Polystyrene diffuser



- 3-pole terminal block, cable cross section up to 3 x 2.5 mm²
- 5-pole terminal block, cable cross section up to 5 x 2.5 mm² (DALI versions)
- Versions available with CRI 90
- Lifetime (L80/B10): up to 60,000 h (at 25 °C)


TECHNICAL DATA

Electrical data


Nominal wattage	30.00 W
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Nominal current	280 mA
Inrush current	30 A
Inrush current time T_{h50}	200 μ s
Max. number of luminaires per miniature circuit breaker B16	20
Max. number of luminaires per miniature circuit breaker C10	21
Max. number of luminaires per miniature circuit breaker C16	33
Power factor λ	> 0.93
Total harmonic distortion	< 10 %
Protection class	II
Operating mode	External LED driver
Dimming interface	DALI-2/loT

Photometrical data

Luminous flux	3450 lm
Luminous efficacy	115 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	> 80
Standard deviation of color matching	3 sdc _m
Luminous intensity	-
Low flicker	Yes
Flickering metric (Pst LM)	-
Stroboscope effect metric (SVM)	-
Photobiological safety group acc. to EN62778	RG0
Photobiological safety group acc. to EN62471	RG0
Beam angle	90 °
UGR	< 19

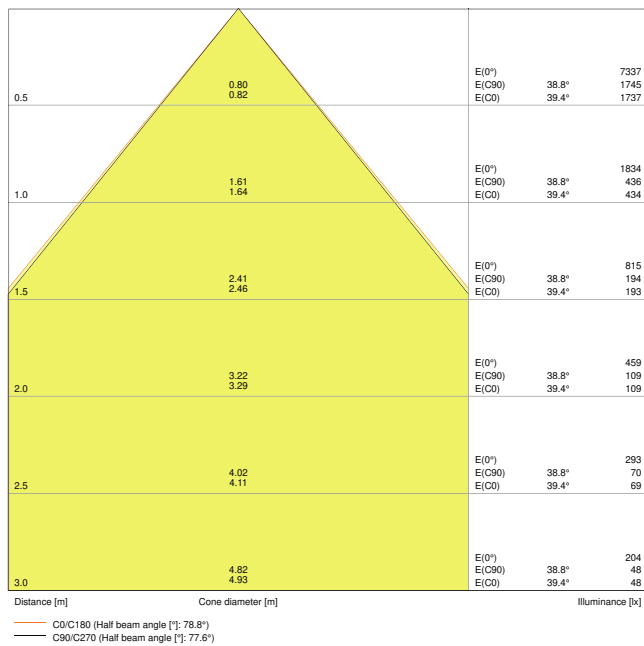


PL PFM 1200 DALI 30W 3000K UGR19 LDT

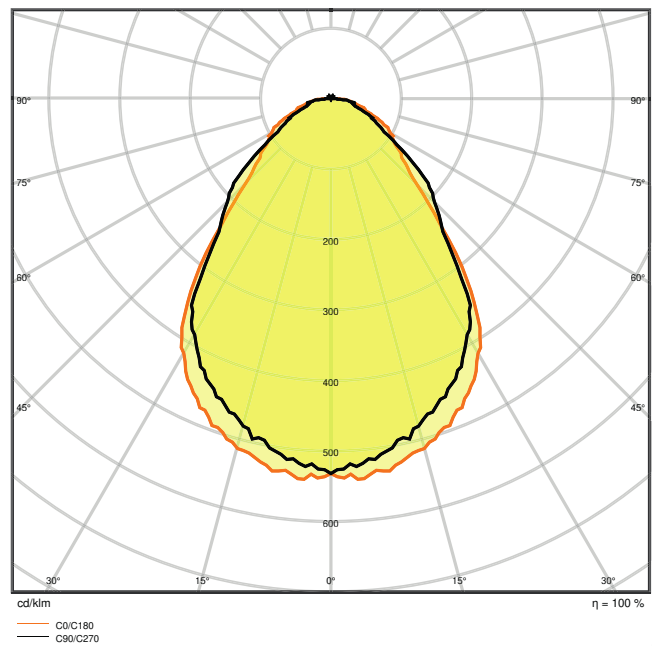


PL PFM 1200 DALI 30W 3000K UGR19 LDT

Dimensions & Weight

Length	1195.00 mm
Width	295.00 mm
Height	9.00 mm
Product weight	1700.00 g



Panel LED 1200 mn k



Panel LED 1200 mn k

Materials & Colors

Product color	White
Housing color	White
Body material	Steel

Cover material	Polystyrene (PS)
Light emitting surface material	Polystyrene
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-10...+45 °C
Type of connection	Screwless terminal, 5-Pole (L, N, PE, DA+, DA-)
Type of protection	IP40/IP20
Protection class IK (shock resistance)	IK03
Dimmable	Yes
Type of dimming	DALI
Mounting type	Recessed/Suspended/Surface
Mounting location	Ceiling / Wall
Application environment	Indoor
Mounting length	1190 mm
Mounting width	290,0 mm
Mounting depth	50,0 mm
With light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	100000 h ¹⁾
Lifespan L80/B10 at 25 °C	60000 h ¹⁾
Lifespan L80/B50 at 25 °C	60000 h
Lifespan L90/B10 at 25 °C	35000 h
Number of switching cycles	50000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear







Output current	950 mA
ECG - Output ripple current	< 3 %

Certificates & Standards

Standards	CE / CB / ENEC / EAC
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No

Replaceable light source (EPREL)	Not replaceable
----------------------------------	-----------------





Accessories Optional








Product image	Product name	EAN
	PANEL 1200x300 RECESSED MOUNT FRAME	4058075472976
	PANEL 1200 Surface Mount Kit	4058075813854
	PANEL 1200 Surface Mount Kit	4058075108820
	PANEL RECESSED MOUNT CLIPS VAL 4x	4058075409859
	PANEL Suspension Kit	4058075402928
	PANEL 1200 X 300 SURFACE MOUNT KIT VAL	4058075472952



EQUIPMENT / ACCESSORIES


- Accessories for several mounting options available
- Connector box with 3-pole or 5-pole terminal included
- Security rope for luminaire included
- Security brackets included
- External control gear included
- Not suitable for use with Emergency Conversion Box

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	PANEL PERFORMANCE 1200
	Legal information	Legal insert
	Legal information	LSI PL PFM AND PL PFM DALI
	Declarations of conformity	PL PFM 1200 DALI

Photometric and lighting design files		Document name
	IES file (IES)	PL PFM 1200 DALI 30W 3000K UGR19
	LDT file (Eulumdat)	PL PFM 1200 DALI 30W 3000K UGR19 LDT
	ULD file (DIALux)	PL PFM 1200 DALI 30W-3000K UGR19
	ROLF file (RELUX)	PL PFM 1200 DALI
	UGR file (UGR table)	PL PFM 1200 DALI 30W 3000K UGR19 LDT
	Light distribution curve type cone	PL PFM 1200 DALI 30W 3000K UGR19 LDT
	Light distribution curve type polar	PL PFM 1200 DALI 30W 3000K UGR19 LDT

CAD/BIM files		Document name
	BIM Revit 3D	PL PFM gen3
	CAD STEP 3D	PL PFM 1200x300 Gen3

Tender texts		Document name
	Tender documents	PANEL PERFORMANCE 1200X300 UGR 19 DALI 30 W 3000 K UGR19-EN


LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075440210	Folding box 1	43 mm x 1,285 mm x 330 mm	3678.00 g	18.23 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075440227	Shipping box 4	1,314 mm x 176 mm x 328 mm	9766.00 g	75.85 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

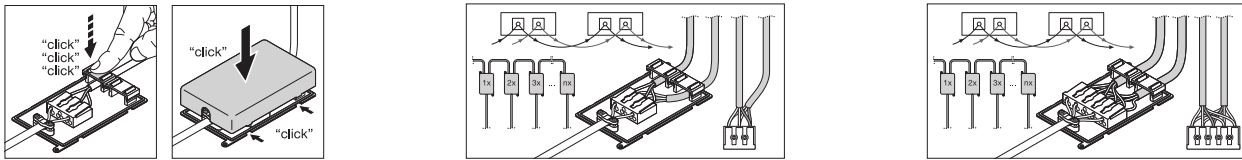

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.