

PRODUCT DATASHEET

LN MAG BATTEN T5 1468

LINEAR MAGNETIC BATTEN T5 | Luminaire insert for LED TUBE T5 AC



PERFOR-
MANCE
CLASS

Areas of application

- Replacement kit for modernizing existing metallic ceiling lights (T8 and T5 Fluorescent) to energy-saving LED technology
- Offices, public buildings
- Supermarkets and department stores
- Industry
- Corridors, foyers, waiting areas

Product benefits

- Retrofitting without completely replacing existing luminaires
- If necessary, the old luminaire may remain installed on the ceiling during the conversion process
- Control gear and wiring may remain in the old luminaire if necessary
- Easy replacement of the LED TUBE T5 AC allows to participate in progress of LED technology over time
- Simple and quick upgrade solution
- Integrated fuse for additional safety
- 5 years guarantee

Product features

- Available in 4 different lengths: 568 mm, 868 mm, 1168 mm and 1468 mm
- Luminaire insert for accommodating one LED TUBE T5 AC 230V
- Suitable for LED TUBE T5 AC, HE or HO, 830/840/865
- Strong neodym magnets




TECHNICAL DATA

Electrical data

Nominal voltage	220...240 V
Mains frequency	50/60 Hz
Protection class	I
Operating mode	Mains voltage

Dimensions & Weight

Length	1468.00 mm
Width	25.00 mm
Height	45.00 mm
Product weight	630.00 g
Cable length	1000 mm



LN MAG BATTEN T5 1468

Materials & Colors

Product color	White
Housing color	White
Body material	Steel
Glow Wire Test according to IEC 60695-2-12	850 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+45 °C
Temperature range at storage	-20...80 °C
Type of connection	Screwless terminal, 3-Pole
Type of protection	IP20
Protection class IK (shock resistance)	IK02
Dimmable	No
Mounting type	Surface

Mounting location	Ceiling
Application environment	Indoor
With light source	No
Replaceable light source	No
Holder designation	G5







Certificates & Standards


Standards	CE / UKCA / ENEC / CB / DEKRA
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No

Additional product data

Number of illuminants	1
-----------------------	---

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	LN MAG BATTEN T5
	User instruction / safety instructions	LINEAR MAGNETIC BATTEN T5
	Legal information	Legal Insert LN MAG BATTEN
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	Safety Insert G11205497
	Declarations of conformity	LN MAG BATTEN T5

Tender texts		Document name
	Tender documents	LINEAR MAGNETIC BATTEN T5 1468-EN




LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
--------------	------------------------------	--------------------------------------	--------------	--------

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854009761	Folding box 1	70 mm x 1,482 mm x 37 mm	769.00 g	3.84 dm ³
4099854009778	Shipping box 10	1,504 mm x 372 mm x 90 mm	8415.00 g	50.35 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

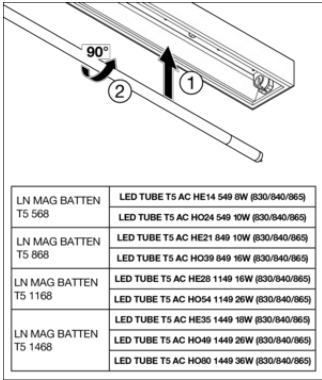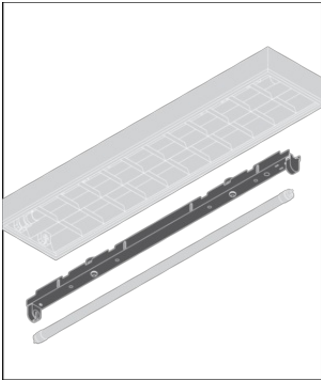

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.