


PRODUCT DATASHEET

FL MAX POWER SUPPLY P 600W

FLOODLIGHT MAX | Floodlights

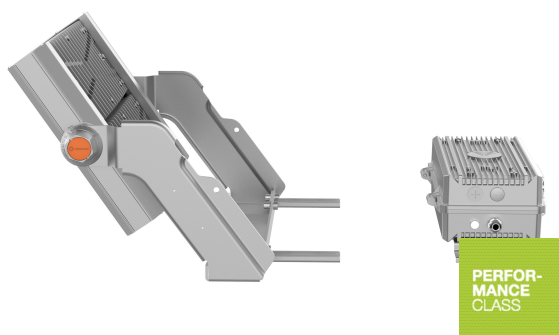

Areas of application

- Public areas
- Construction areas
- Car parks
- Sports facilities
- Commercial lighting

Product benefits

- Available in standard version and remote driver version

Product features

- Available with wattage: 600W, 900W, 1200W
- Color temperature: 5700 K
- 1...10 V dimming control
- Available with 10°, 30° and 60° symmetric beam angles, as well as 50°x110° asymmetric light distribution
- Type of protection: IP66
- Impact resistance: IK08
- Die-cast aluminum housing
- Lifetime: up to 100,000 h


TECHNICAL DATA

Electrical data

Nominal wattage	600.00 W
Nominal voltage	200...277 V
Mains frequency	50...60 Hz
Protection class	I

Dimensions & Weight

Length	188.00 mm
Width	447.00 mm
Height	146.00 mm
Product weight	6700.00 g



FL MAX POWER SUPPLY P 600W

Materials & Colors

Cover material	Aluminium
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-30...+50 °C
Temperature range at storage	-40...+70 °C
Type of protection	IP67
Protection class IK (shock resistance)	IK08
Dimmable	No
Replaceable light source	No

Certificates & Standards

Standards	CB / EMC / ROHS / SASO
-----------	------------------------

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854202988	Folding box 1		8933.00 g	
4099854202995	Shipping box 2	537 mm x 537 mm x 234 mm	17865.00 g	67.48 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.