

PRODUCT DATASHEET

TRUSYS UNIV P 75W 840 VN CL DALI

TRUSYS UNIVERSAL DALI | The DALI solution for refurbishment - universal fitting to existing trunking luminaire system

Areas of application

- Direct replacement for luminaires with compact fluorescent lamps
- Industry halls, high rack warehouse, hardware stores
- Discounters, supermarkets



Product benefits

- The solution for refurbishment: universal fitting to existing trunking luminaire system
- Easy installation, no tools required for connection
- Energy saving and cost-effective
- Flexible application due to a range of different lumen packages and beam angles
- 5 years guarantee

Product features

- IoT-ready DALI-2 driver
- Beam angles: 90° (W), 60° (N), 30° (VN)
- Click into place solution with smart click buttons
- Luminous efficacy: up to 180 lm/W
- Lifetime (L80/B10): up to 100,000 h (at 25 °C)
- Initial color consistency: ≤ 3 SDCM




TECHNICAL DATA

Electrical data


| | |
|---|-----------------------|
| Nominal wattage | 75.00 W |
| Nominal voltage | 220...240 V |
| Mains frequency | 0/50/60 Hz |
| Nominal current | 340.000 mA |
| Inrush current | 0.34 A |
| Inrush current time T_{h50} | 156 μ s |
| Max. number of luminaires per miniature circuit breaker B16 | 9 |
| Max. number of luminaires per miniature circuit breaker C10 | 7 |
| Max. number of luminaires per miniature circuit breaker C16 | 12 |
| Power factor λ | ≥ 0.90 |
| Total harmonic distortion | $\leq 15\%$ |
| Protection class | I |
| Operating mode | Integrated LED driver |
| Dimming interface | DALI-2 / IoT |

Photometrical data

| | |
|--|---------------------------|
| Luminous flux | 12750 lm |
| Luminous efficacy | 170 lm/W |
| Color temperature | 4000 K |
| Light color (designation) | Cool White |
| Color rendering index Ra | > 80 |
| Standard deviation of color matching | ≤ 3 sdc _m |
| Low flicker | Yes |
| Flickering metric (Pst LM) | <1 |
| Stroboscope effect metric (SVM) | <0.4 |
| Photobiological safety group acc. to EN62778 | RG1 |
| Beam angle | 30 ° |

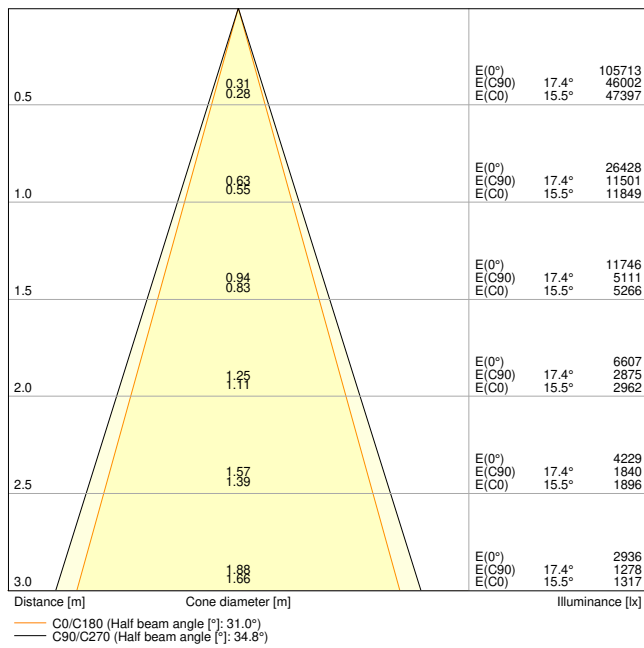


TRUSYS UNIV P 75W 840 VN CL PS DALI

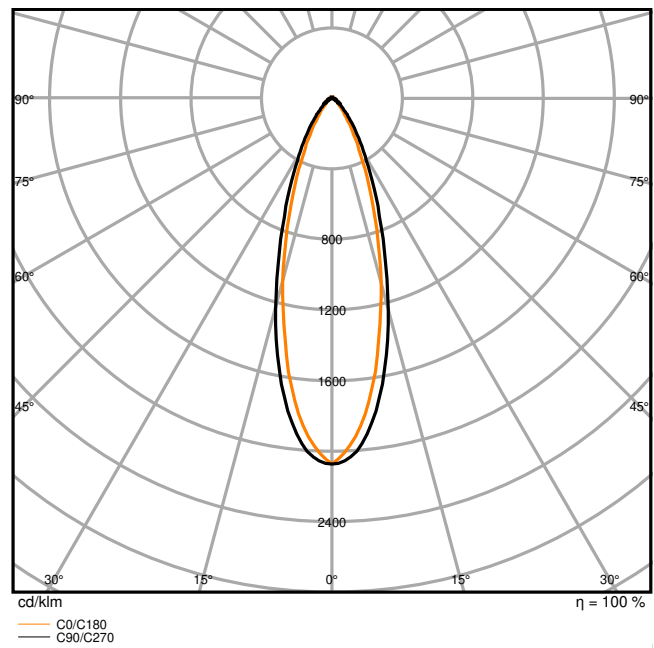

TRUSYS UNIV P 75W 840 VN CL PS DALI

Dimensions & Weight

| | |
|----------------|------------|
| Length | 1504.00 mm |
| Width | 68.00 mm |
| Height | 26.00 mm |
| Product weight | 1790.00 g |



TRUSYS UNIV P 73/75W 840 CL
PS/DALI

Materials & Colors

| | |
|--|-------------------------------|
| Product color | White |
| Housing color | White |
| Body material | Aluminum |
| Cover material | Polymethylmethacrylate (PMMA) |
| Light emitting surface material | Polymethylmethacrylate (PMMA) |
| Glow Wire Test according to IEC 60695-2-12 | 650 °C |
| Mercury content | 0.0 mg |

Application & Mounting

| | |
|--|--------------------|
| Ambient temperature range | -20...+40 °C |
| Temperature range at storage | -40...+80 °C |
| Type of connection | Plug-In connection |
| Type of protection | IP20 |
| Protection class IK (shock resistance) | IK02 |
| Dimmable | Yes |
| Type of dimming | DALI2 |
| Mounting type | Surface/Suspended |
| Mounting location | Mounting rail |
| Application environment | Indoor |
| Adjustable | No |
| With light source | Yes |

Lifespan

| | |
|----------------------------|------------------------|
| Lifespan L70/B50 at 25 °C | 120000 h ¹⁾ |
| Lifespan L80/B10 at 25 °C | 100000 h ¹⁾ |
| Lifespan L90/B10 at 25 °C | 54000 h |
| Number of switching cycles | 50000 |

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

| | |
|-----------------------------|--------|
| Output current | 500 mA |
| ECG - Output ripple current | < 5 % |

Certificates & Standards

| | |
|--|---|
| Standards | CE / CB / UKCA / ENEC / TÜV / EAC / EPD |
| Luminaire with limited surface temperature, "D sign" | No |

| | |
|----------------------------------|----------------------|
| Ball shot safe | No |
| EPD | LEDV-00033-V01.01-EN |
| Replaceable light source (EPREL) | Not replaceable |







Additional product data






| | |
|----------------|---------|
| Added function | VIVARES |
|----------------|---------|




EQUIPMENT / ACCESSORIES

– Various accessories available

DOWNLOAD DATA

| Documents and certificates | | Document name |
|--|--|------------------------------------|
|  | User instruction / safety instructions | TRUSYS UNIVERSAL |
|  | Legal information | Legal insert |
|  | Legal information | LISO Insert TRUSYS UNIVERSAL |
|  | Legal information | Informationstext 18 Abs 4 ElektroG |
|  | Declarations of conformity | CE Declaration Trusys Universal |
|  | Declarations of conformity UKCA | UKCA Declaration Trusys Universal |

| Photometric and lighting design files | | Document name |
|--|-------------------------------------|-------------------------------------|
|  | IES file (IES) | TRUSYS UNIV P 75W 840 VN CL PS DALI |
|  | LDT file (Eulumdat) | TRUSYS UNIV P 75W 840 VN CL PS DALI |
|  | UGR file (UGR table) | TRUSYS UNIV P 75W 840 VN CL PS DALI |
|  | Light distribution curve type cone | TRUSYS UNIV P 75W 840 VN CL PS DALI |
|  | Light distribution curve type polar | TRUSYS UNIV P 75W 840 VN CL PS DALI |


| CAD/BIM files | | Document name |
|--|------------------|--|
|  | BIM Revit 3D | TruSys Universal |
|  | CAD STEP 3D | TRUSYS UNIV |
| Tender texts | | Document name |
|  | Tender documents | TRUSYS UNIVERSAL 75W 840 VN CL DALI-EN |

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4099854311642 | Folding box 1 | 93 mm x 1,540 mm x 69 mm | 2080.00 g | 9.88 dm ³ |
| 4099854311659 | Shipping box 4 | 1,560 mm x 295 mm x 110 mm | 9780.00 g | 50.62 dm ³ |



The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



TRUSYS UNIVERSAL ON/OFF

| W | LM | 1 | 2 | 3 | 4 |
|-----|-------|----|---|----|----|
| 41W | 7380 | — | — | — | ON |
| 49W | 8720 | — | — | ON | — |
| 57W | 10030 | ON | — | — | — |
| 66W | 11420 | ON | — | — | — |
| 73W | 12400 | — | — | — | — |



| 1x TRUSYS UNIV | 2x TRUSYS UNIV | via TRUSYS UNIV |
|--------------------|----------------|-----------------|
| CH0 A 4000 | 818 A 4000 | CH0 A 4000 |
| TRUSYS UNIV ON/OFF | 6 | 0 |
| TRUSYS UNIV DALI | 7 | 0 |

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.