

## PRODUCT DATASHEET LED TUBE T8 EM STARTER

LED TUBE T8 EM STARTER | Starter for LED TUBE EM (CCG)



---

### Areas of application

- Not suitable for operation with electronic control gears


---

### Product features

- LED tube starter for the replacement of a fluorescent lamp with a T8 EM LED tube
- Suitable for operation with low loss or conventional control gear or line voltage

TECHNICAL DATA

Dimensions & Weight

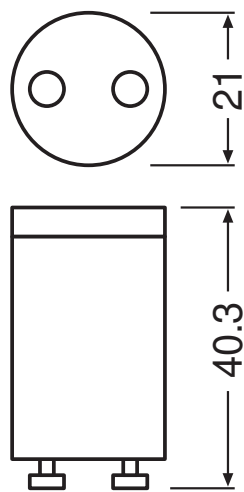

Diameter	21 mm
Product weight	5.00 g





Country-specific categorizations

Order reference	LED TUBE T8 EM
-----------------	----------------

Energy labelling regulation data acc EU 2019/2015

Length	40 mm
Height	21 mm
Width	21 mm

DOWNLOAD DATA

Documents and certificates		Document name
	Extended installation guide	SubstiTUBE® T8 T5
	Legal information	Informationstext 18 Abs 4 ElektroG
	Declarations of conformity	LED T8 EM STARTER
	Declarations of conformity UKCA	LED T8 EM STARTER

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075013674	Folding box 2	46 mm x 25 mm x 42 mm	9.00 g	0.05 dm <sup>3</sup>
4058075013681	Shipping box 20	99 mm x 32 mm x 218 mm	169.00 g	0.69 dm <sup>3</sup>
4058075013698	Shipping box 840	446 mm x 309 mm x 246 mm	7.42 g	33.90 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## References / Links

– For current information see [www.ledvance.com/osram-led-tube](http://www.ledvance.com/osram-led-tube)

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.