




LEDVANCE

# PRODUCT DATASHEET

## HAZ LIN 060 HUV D 8 50 WH

LINEAR HAZARDOUS LOCATION | Linear luminaire for Hazardous Location

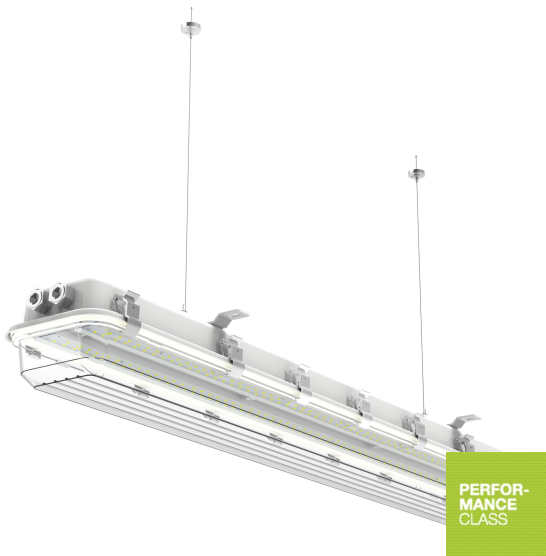

### Areas of application

- Power plants
- Heavy industrial sites
- Loading docks
- Chemical processing facilities

### Product features

- Explosion-proof construction: prevents ignition of gases, vapors, or dust
- Certified for hazardous areas, meeting UL 844 for explosive environments
- UV stabilized, impact-resistant fiberglass reinforced polycarbonate lens
- Compact and rugged structure; easy for installation
- Shock and vibration resistance with IK08
- SUS304 stainless steel housing: corrosion & heat resistant, durable for harsh use
- Selectable wattage and lumen outputs
- 5000K
- IP66

TECHNICAL DATA

Electrical data

Nominal wattage	60.00 W
Nominal voltage	277...480 V

Photometrical data

Luminous flux	8381 lm
Luminous efficacy	140 lm/W
Color temperature	5000 K
Color rendering index Ra	80

Dimensions & Weight

Length	1302.00 mm
Width	220.00 mm
Height	149.00 mm
Product weight	8920.00 g

Materials & Colors

Product color	White
Housing color	White
Mercury content	0.0 mg

Application & Mounting

Dimmable	Yes
Type of dimming	0-10V
Mounting type	Surface
Replaceable light source	No


Certificates & Standards

Replaceable light source (EPREL)	Not replaceable
----------------------------------	-----------------

Additional product data

NAED	66814
------	-------

DOWNLOAD DATA

Photometric and lighting design files		Document name
	IES file (IES)	HAZARDOUS LINEAR

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854606045	Shipping box 1	1,400 mm x 250 mm x 175 mm	9525.00 g	61.26 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.