


PRODUCT DATASHEET

LEDRT GIMBAL 3" 5CCT 550LM 120V WHITE

SYLVANIA DOWNLIGHT GIMBAL | Downlight Gimbal with selectable 5 CCT

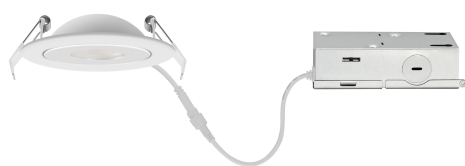

Areas of application

- Residential
- Commercial applications
- Closets
- Cabinet lighting

Product features

- Canless recessed adjustable accent downlight with remote driver design for easy installation
- Modern styling and slim form
- Selectable CCTs: 2700/3000/3500/4000/5000K
- Flicker-free dimming, Phase-cut
- Up to 79 LPW
- Energy savings up to 88 %
- Available in 120VAC
- Full 90° omnidirectional aiming delivers uniform glare free illumination
- Precise illumination with a beam angle of 45° FWHM
- 90 CRI, R9>50

TECHNICAL DATA

Electrical data

Nominal wattage	7.00 W
Nominal voltage	120 V

Photometrical data

Luminous flux	550 lm
Luminous efficacy	78 lm/W
Color temperature	2700 ... 5000 K
Color rendering index Ra	90

Dimensions & Weight

Diameter	105.00 mm
Product weight	330.00 g

Materials & Colors

Product color	White
Housing color	White
Body material	Polycarbonate (PC)
Mercury content	0.0 mg

Application & Mounting

Type of connection	Plug, quick disconnect
Dimmable	Yes
Type of dimming	PHASE CUT
Mounting type	Recessed
Application environment	Indoor
Replaceable light source	No

Certificates & Standards



Replaceable light source (EPREL)	Not replaceable
----------------------------------	-----------------

Additional product data

NAED	62392
------	-------

Accessories Optional

Product image	Product name	EAN
	MD EXT CABLE 6FT WH	0046135608988
	MD EXT CABLE 10FT WH	0046135608995

Product image	Product name	EAN
	MD EXT CABLE 20FT WH	0046135609008
	SLIM MD FRAME	0046135629594
	MD FRAME T-GRID	0046135637438



EQUIPMENT / ACCESSORIES

- Luminaire with interconnected cable to galvanized steel remote driver wiring enclosure via FT4 cable
- 3 Wire Nuts

Safety advice

- Suitable for wet locations.
- Suitable for use in closets, compliant with NFPA 70, NEC section 410.16 (A)(3) and 410.16 (C)(5).
- Ceiling Thickness 0.5"-1.5" (12.7-38.1 mm).

DOWNLOAD DATA

Photometric and lighting design files		Document name
	IES file (IES)	Hi-PerformanceLED Downlight Gimbal
	IES files (IES, additional)	Performance Gimbal Downlight LM79 + .ies Files

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
0046135623929	Folding box 1	140 mm x 84 mm x 112 mm	440.00 g	1.32 dm ³
10046135623926	Shipping box 4	357 mm x 157 mm x 130 mm	2087.00 g	7.29 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.