




## Spectrum Test Report

Sample : Date : 2024-10-24 11:27:43  
Specification : CYLINDPS010UNHD8SC2R3BZP Middle 3 Sam. Status:own :  
Sample No. : Standard : LM-79-19  
Manufacturer : LEDVANCE LLC Instrument : HaasSuite(EVERFINE)  
Remark : Test by : Alan Wang

### Test Condition

Temperature : 25.3Deg RH : 65.0%  
WL Range : 380nm-780nm IP : 50991 (78%)  
Test Mode : Accuracy Test T : 2275 ms

**Spectrum** : Low

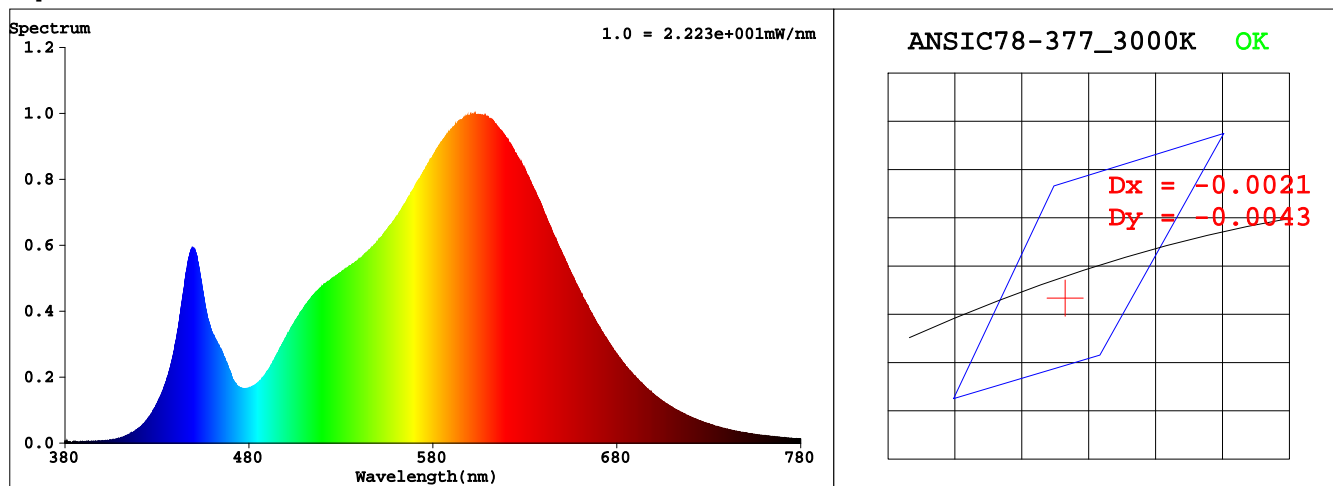

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4320$   $y = 0.3987$  /  $u' = 0.2497$   $v' = 0.5185$  ( $duv = -1.46e-03$ )

CCT= 3041K Prcp WL:  $L_d = 583.2nm$  Purity=49.3%

Peak WL:  $L_p = 603nm$  FWHM:  $=130.8nm$  Ratio:  $R=22.7\%$   $G=74.8\%$   $B=2.5\%$

Render Index:  $R_a = 82.8$  AvgR = 77.2 TM30:  $R_f = 83$   $R_g = 97$

EEL: 0.10065 A++ Highest

$R_1 = 81$   $R_2 = 90$   $R_3 = 96$   $R_4 = 81$   $R_5 = 82$   $R_6 = 88$   $R_7 = 83$

$R_8 = 60$   $R_9 = 8$   $R_{10} = 78$   $R_{11} = 81$   $R_{12} = 72$   $R_{13} = 83$   $R_{14} = 99$   $R_{15} = 74$

### Photometric & Radiometric Parameters

Flux = 1033.5 lm Eff. : 124.37 lm/W  $\Phi_e = 3.3291 W$

### Electrical parameters

$V = 120.00 V$   $I = 0.06950 A$   $P = 8.310 W$  PF = 0.9964 F=60.00 Hz

**Dongguan New Testing Centre Co., Ltd**

3F, No. 1 the 1st North Industry Road, Songshan Lake Science & Technology Park, Dongguan, Guangdong, China