




Spectrum Test Report

Sample : Date : 2024-10-17 20:04:34
Specification : CYLINDPS020UNHD8SC2R4BZP Min 400(Sam. Status) + up:
Sample No. : Standard : LM-79-19
Manufacturer : LEDVANCE LLC Instrument : HaasSuite(EVERFINE)
Remark : Test by : Alan Wang

Test Condition

Temperature : 25.3Deg RH : 65.0%
WL Range : 380nm-780nm IP : 50802 (78%)
Test Mode : Accuracy Test T : 167 ms

Spectrum : High

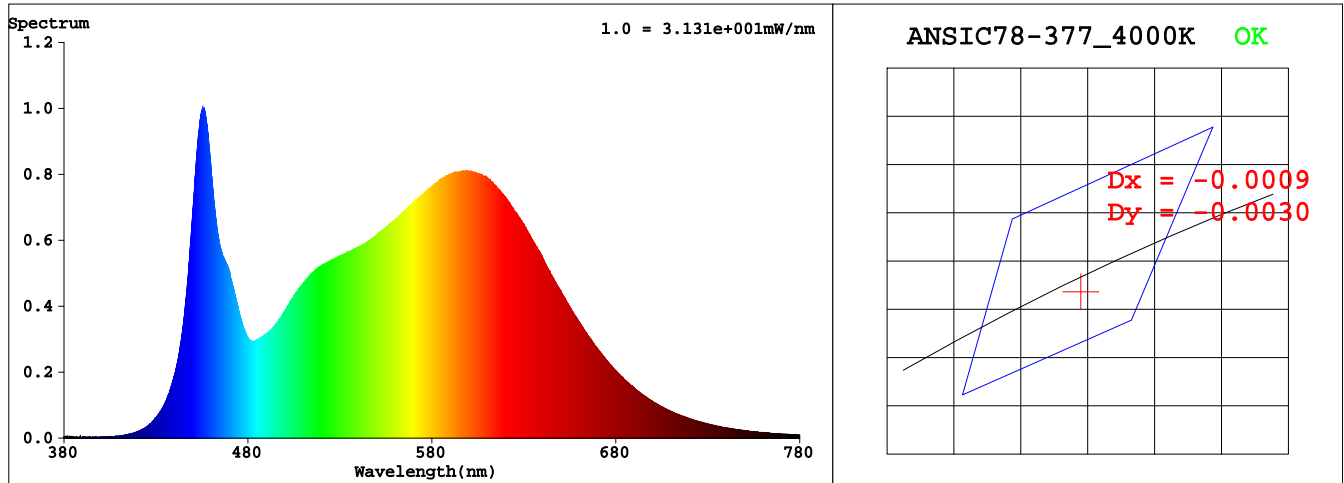

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.3828$ $y = 0.3757$ / $u' = 0.2271$ $v' = 0.5015$ ($duv = -1.17e-03$)

CCT= 3928K Prcp WL: Ld=580.0nm Purity=27.6%

Peak WL: Lp=455nm FWHM: =22.6nm Ratio:R=19.2% G=76.6% B=4.2%

Render Index: Ra = 86.1 AvgR = 81.0 TM30:Rf=85 Rg=95

EEL: 0.09223 A++ Highest

R1 =86 R2 =95 R3 =96 R4 =83 R5 =86 R6 =91 R7 =85

R8 =68 R9 =23 R10=87 R11=83 R12=65 R13=89 R14=98 R15=80

Photometric & Radiometric Parameters

Flux = 1373.2 lm Eff. : 140.69 lm/W Fe = 4.4719 W

Electrical parameters

V = 120.00 V I = 0.08280 A P = 9.760 W PF = 0.9823 F=60.00 Hz

Dongguan New Testing Centre Co., Ltd

3F, No. 1 the 1st North Industry Road, Songshan Lake Science & Technology Park, Dongguan, Guangdong, China