

# PRODUCT DATASHEET

## TRUSYS FLEX P 50W 865 N CL WT

TruSys® FLEX NARROW | Luminaire inserts with narrow light distribution, up to 175 lm/W



PERFOR-  
MANCE  
CLASS

### Areas of application

- Direct replacement for luminaires with compact fluorescent lamps
- Industry halls, high rack warehouse, garages, hardware stores
- Discounters, supermarkets

### Product benefits

- Directed light distribution for high heights
- Easy installation, no tools required for connection
- Energy saving and cost-effective
- Flexible application due to a range of different lumen packages and beam angles
- 5 years guarantee

### Product features

- Beam angle narrow: 60°
- Click into place solution with smart click buttons
- Luminous efficacy: up to 175 lm/W
- Fixed luminaire taps
- Luminaire versions available with on-off or IoT-ready DALI-2 driver
- Steel-sheet housing
- Lens material: PMMA
- Type of protection: IP40




## TECHNICAL DATA

### Electrical data


Nominal wattage	50.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	230.000 mA
Inrush current	32 A
Inrush current time $T_{h50}$	182 $\mu$ s
Max. number of luminaires per miniature circuit breaker B16	13
Max. number of luminaires per miniature circuit breaker C10	10
Max. number of luminaires per miniature circuit breaker C16	17
Power factor $\lambda$	$\geq 0.95$
Total harmonic distortion	$\leq 15\%$
Protection class	I
Operating mode	Integrated LED driver

### Photometrical data

Luminous flux	8600 lm
Luminous efficacy	175 lm/W
Color temperature	6500 K
Light color (designation)	Cool Daylight
Color rendering index Ra	$\geq 80$
Standard deviation of color matching	3 sdc <sub>m</sub>
Low flicker	Yes
Flickering metric (Pst LM)	$\leq 1$
Stroboscope effect metric (SVM)	$\leq 0.4$
Photobiological safety group acc. to EN62778	RG1
Beam angle	60 °

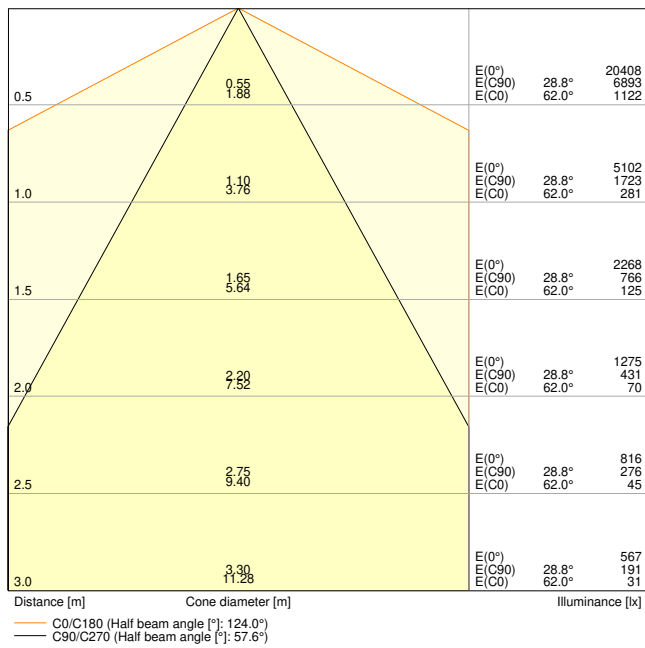


TRUSYS FLEX P 50W 865 N CL WT

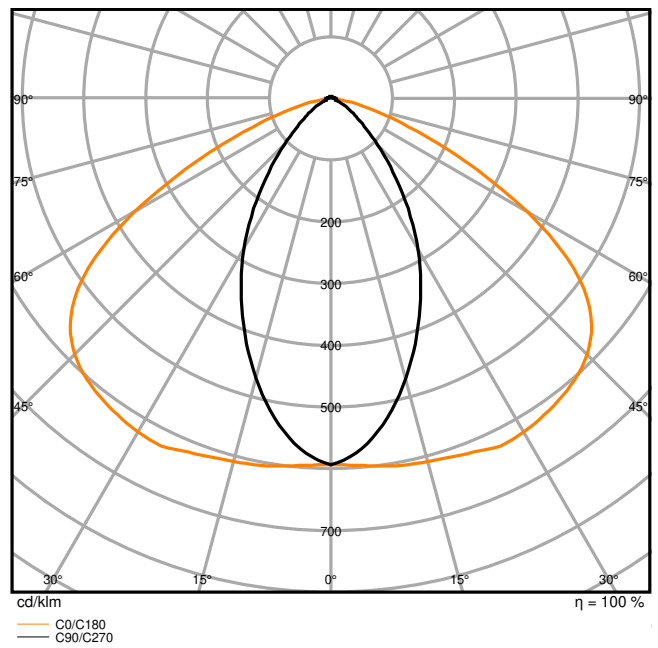

TRUSYS FLEX P 50W 865 N CL WT

Dimensions & Weight

Length	1500.00 mm
Width	77.70 mm
Height	39.40 mm
Product weight	1700.00 g



TRUSYS FLEX luminaire - clear

Materials & Colors

Product color	White
Housing color	White
Body material	Steel
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	Polymethylmethacrylate (PMMA)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

### Application & Mounting

Ambient temperature range	-25...+40 °C
Temperature range at storage	-40...+80 °C
Type of connection	Plug-In connection
Type of protection	IP40
Protection class IK (shock resistance)	IK04
Dimmable	No
Mounting type	Suspended/Surface
Mounting location	Mounting rail
Application environment	Indoor
Adjustable	No
With light source	Yes

### Lifespan

Lifespan L70/B50 at 25 °C	100000 h <sup>1)</sup>
Lifespan L80/B10 at 25 °C	76000 h <sup>1)</sup>
Lifespan L80/B50 at 25 °C	89000 h
Lifespan L90/B10 at 25 °C	43000 h
Number of switching cycles	100000

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Control gear

Output current	620 mA
ECG - Output ripple current	< 5 %

### Certificates & Standards








Standards	CE / CB / UKCA / ENEC / EAC
Luminaire with limited surface temperature, "D sign"	Yes








Ball shot safe	No
Replaceable light source (EPREL)	Not replaceable


**EQUIPMENT / ACCESSORIES**

- Mounting rail with fixed integrated 5- and 8-pole cable


**DOWNLOAD DATA**

Documents and certificates		Document name
	User instruction / safety instructions	TRUSYS FLEX 865 ON OFF
	Legal information	Legal insert TRUSYS FLEX ON OFF
	Legal information	LSI TRUSYS FLEX 865 ON OFF
	Legal information	Informationstext 18 Abs 4 ElektroG
	Declarations of conformity	TRUSYS FLEX on/off
	Declarations of conformity UKCA	TRUSYS FLEX on/off
	Certificates	ENEC Certificate Trusys Flex ON/OFF

Photometric and lighting design files		Document name
	IES file (IES)	TRUSYS FLEX P 50W 865 N CL WT
	LDT file (Eulumdat)	TRUSYS FLEX P 50W 865 N CL WT
	ULD file (DIALux)	TRUSYS FLEX P 50W 865 N CL WT
	ROLF file (RELUX)	TRUSYS FLEX P 50W 865 N CL WT
	UGR file (UGR table)	TRUSYS FLEX P 50W 865 N CL WT
	Light distribution curve type cone	TRUSYS FLEX P 50W 865 N CL WT
	Light distribution curve type polar	TRUSYS FLEX P 50W 865 N CL WT

CAD/BIM files		Document name
	CAD STEP 3D	TruSys FLEX

---


Tender texts		Document name
	Tender documents	TruSys FLEX NARROW 50W 865 N CL WT-EN

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854190698	Folding box 1	108 mm x 1,534 mm x 102 mm	1875.00 g	16.90 dm <sup>3</sup>
4099854190704	Shipping box 4	1,547 mm x 218 mm x 231 mm	8293.00 g	77.90 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

**ADDITIONAL CATALOG INFORMATION**

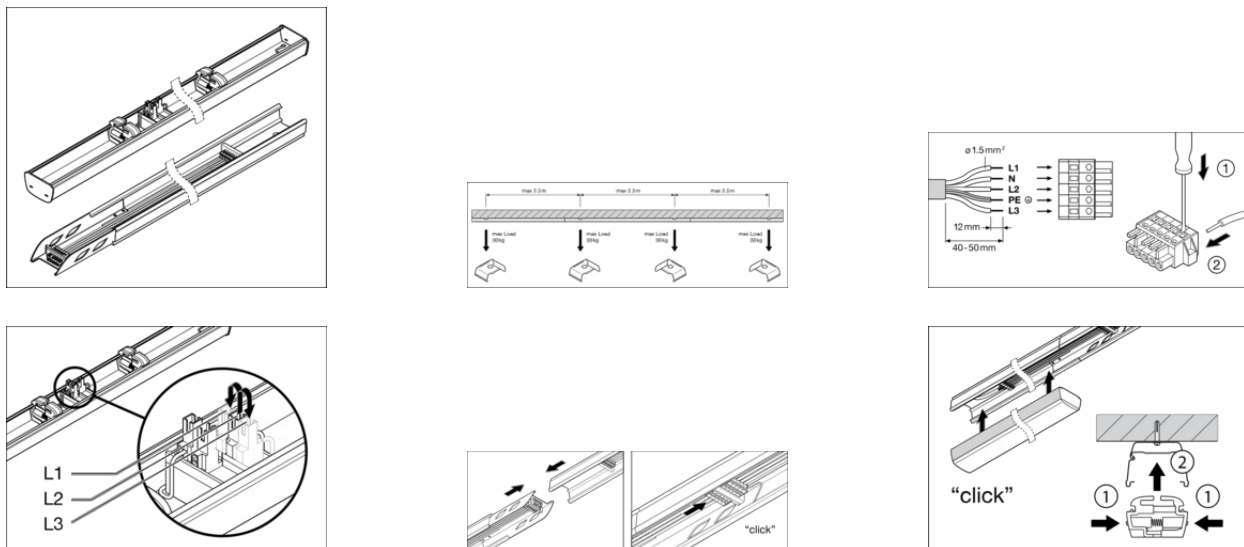

**References / Links**

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

