


PRODUCT DATASHEET

Orbis Berlin 390 mm 24W 830 BK

ORBIS BERLIN | LED ceiling luminaires with plastic ring

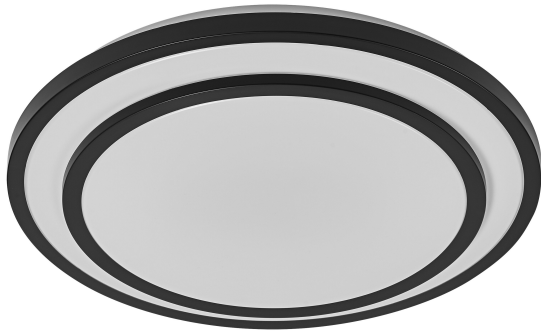

Areas of application

- Indoor applications
- Kitchens, living rooms, children's rooms or home offices

Product benefits

- Very homogenous light
- Elegant design

Product features

- Decorative domestic lighting
- Ceiling luminaire with advanced LED technology



TECHNICAL DATA

Electrical data


Nominal wattage	24.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	185.000 mA
Max. number of luminaires per miniature circuit breaker B16	35
Max. number of luminaires per miniature circuit breaker C16	48
Power factor λ	> 0.5
Total harmonic distortion	< 101 %
Protection class	I
Operating mode	Electronic control gear (ECG)

Photometrical data

Luminous flux	1450 lm
Total luminous flux of contained light sources	2700 lm
Luminous efficacy	60 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	≥ 80
Standard deviation of color matching	≤ 6 sdc _m
Photobiological safety group acc. to EN62778	RG0
Photobiological safety group acc. to EN62471	RG0
Beam angle	120 °

Dimensions & Weight

Diameter	390.00 mm
Height	78.00 mm
Product weight	770.00 g



ORBIS BERLIN 390MM 24W 830 SI

Materials & Colors

Product color	Black
Housing color	Black
Body material	Metal
Cover material	Plastic
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-20...+80 °C
Type of connection	Terminal, 3-Pole (L, N, PE)
Type of protection	IP20
Dimmable	No
Mounting type	Surface
Application environment	Indoor
With light source	Yes
Replaceable light source	No

Lifespan

Lifespan L70/B50 at 25 °C	50000 h ¹⁾
Number of switching cycles	25000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Certificates & Standards

Standards	CE / UKCA
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	Not replaceable

Additional product data





Number of illuminants	empty
-----------------------	-------

Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in

the event of a fault must be continuously connected to the protective earthing conductor.
 – Check wall-ceiling for suitability. If uncertain, seek professional advice.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	ORBIS
	Legal information	Safety insert G1 1219601
	Declarations of conformity	ORBIS LONDON DUBLIN BERLIN
	Declarations of conformity UKCA	ORBIS LONDON DUBLIN BERLIN

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854446412	Folding box 1	405 mm x 80 mm x 405 mm	1260.00 g	13.12 dm ³
4099854446429	Shipping box 5	445 mm x 430 mm x 430 mm	6671.00 g	82.28 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.