


# PRODUCT DATASHEET

## DR DS-P- 18/220-240/370 BLKH

BULKHEAD ROUND DRIVER | Exchangeable driver

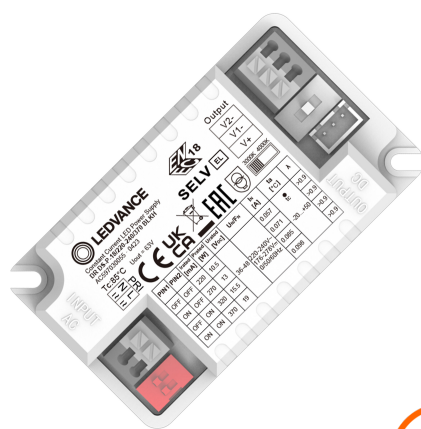

### Areas of application

- Suitable for BULKHEAD ROUND

### Product benefits

- Suitable for 3000 K and 4000 K luminaires and Multi Lumen function

### Product features

- Type of protection: IP20
- UV-stabilized polycarbonate (PC) housing, PC-diffuser




## TECHNICAL DATA

### Electrical data

Nominal wattage	19.00 W
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Nominal current	98 mA
Inrush current	9.5 A
Power factor $\lambda$	> 0.90
Total harmonic distortion	< 15 %
Protection class	II
Dimming interface	Not dimmable

### Dimensions & Weight

Length	79.00 mm
Width	45.00 mm
Height	25.00 mm
Product weight	53.00 g



DRIVER DS-P

### Materials & Colors

Product color	White
Body material	Plastic
Mercury content	0.0 mg

### Application & Mounting

Ambient temperature range	-20...+50 °C
Temperature range at storage	-20...+80 °C

Type of protection	IP20
Dimmable	No
Replaceable light source	No

**Lifespan**

Number of switching cycles	100000
----------------------------	--------

**Control gear**

Nominal output current	370 mA / 320 mA / 270 mA / 220 mA
ECG lifetime	70000 h







**Certificates & Standards**


Standards	CE / CB / UKCA / EAC / ENEC
-----------	-----------------------------

**Additional product data**

Added function	EVERLOOP
----------------	----------

**DOWNLOAD DATA**

Documents and certificates		Document name
	User instruction / safety instructions	DR DS P
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	Light Source Insert G11202326
	Legal information	Safety Insert G11218810
	Declarations of conformity	DR DS-P
	Declarations of conformity UKCA	DR DS-P

Tender texts	Document name
	Tender documents
	BULKHEAD ROUND DRIVER 18220-240370 BLKH-EN

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854286858	Folding box 1	30 mm x 55 mm x 85 mm	60.00 g	0.14 dm <sup>3</sup>
4099854286865	Shipping box 160	460 mm x 320 mm x 185 mm	10398.00 g	27.23 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

### References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.