

# PRODUCT DATASHEET

## PL COMP 600 TPA V 28W 840 U19

PANEL COMPACT 600 UGR<19 TPA | Square recessed panel luminaires with low glare and TP(a) rating, for 600 x 600 mm ceiling systems



### Areas of application

- Areas which require UK building regulation rating TP(a)
- Direct replacement for luminaires with fluorescent lamps
- Offices, conference rooms
- Reception areas, foyers, corridors, elevators
- Suitable for recessed ceiling systems with grid size of 600 x 600 mm

### Product benefits

- Good glare reduction (UGR < 19)
- Low flicker light thanks to special electronic control gear
- Energy savings thanks to system efficacy of up to 120 lm/W
- External driver for extended flexibility and easy installation

### Product features

- Extruded aluminum frame
- Polystyrene diffuser - TP(a) rated (UK)
- Lifetime (L80/B10): up to 50,000 h (at 25 °C)




## TECHNICAL DATA

### Electrical data


Nominal wattage	28.00 W
Nominal voltage	220...240 V
Mains frequency	50/60 Hz
Nominal current	140.000 mA
Inrush current	25 A
Inrush current time $T_{h50}$	150 $\mu$ s
Max. number of luminaires per miniature circuit breaker B16	24
Max. number of luminaires per miniature circuit breaker C10	19
Max. number of luminaires per miniature circuit breaker C16	30
Power factor $\lambda$	> 0.90
Total harmonic distortion	< 20 %
Protection class	II
Operating mode	External LED driver

### Photometrical data

Luminous flux	3360 lm
Luminous efficacy	120 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	> 80
Standard deviation of color matching	5 sdc <sub>m</sub>
Low flicker	Yes
Flickering metric (Pst LM)	<1
Stroboscope effect metric (SVM)	<0.4
Photobiological safety group acc. to EN62778	RG0
Beam angle	90 °
UGR	< 19

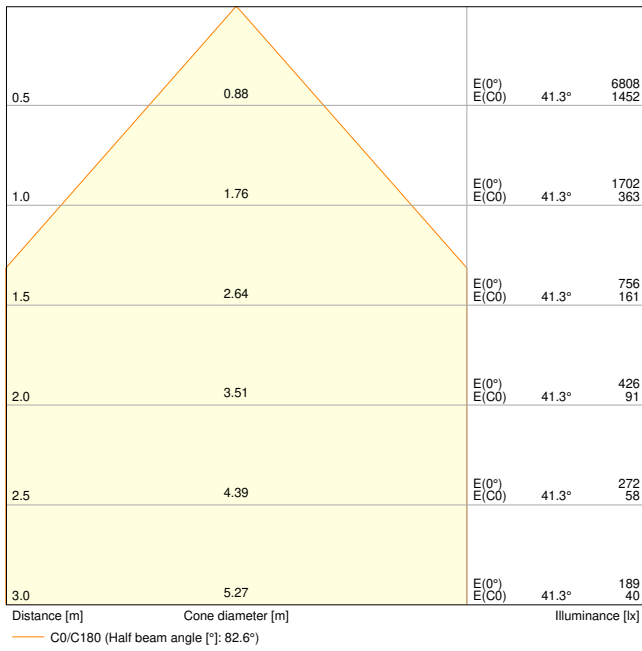


PL COMP 600 TPA V 28W 4000K U19 3360lm

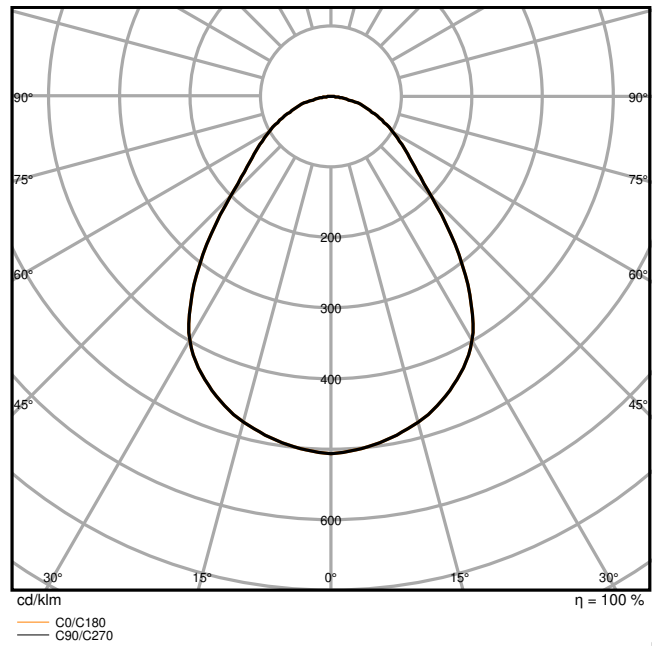

PL COMP 600 TPA V 28W 4000K U19 3360lm

Dimensions & Weight

Length	595.00 mm
Width	595.00 mm
Height	34.00 mm
Product weight	2000.00 g

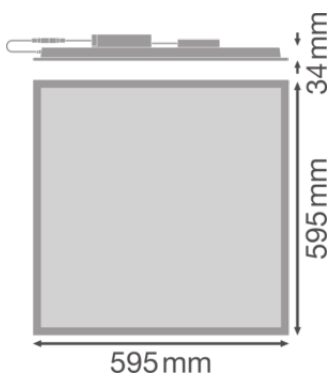

PL COMP 600 TPA 28W

Materials & Colors

Product color	White
Housing color	White
Body material	Steel
Cover material	Polystyrene (PS)
Light emitting surface material	Polystyrene
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

### Application & Mounting

Ambient temperature range	-10...+40 °C
Temperature range at storage	-20...+80 °C
Type of connection	Screwless terminal, 2-Pole (L, N)
Type of protection	IP40/IP20
Protection class IK (shock resistance)	IK02
Dimmable	No
Mounting type	Recessed/Suspended/Surface
Mounting location	Ceiling
Application environment	Indoor
Mounting length	575 mm
Mounting width	575 mm
Mounting depth	50 mm
Adjustable	No
With light source	Yes

### Lifespan

Lifespan L70/B50 at 25 °C	75000 h <sup>1)</sup>
Lifespan L80/B10 at 25 °C	35000 h <sup>1)</sup>
Lifespan L80/B50 at 25 °C	50000 h
Lifespan L90/B10 at 25 °C	20000 h
Number of switching cycles	100000

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Control gear

Output current	750 mA
ECG - Output ripple current	< 5 %
ECG - Length	100 mm

ECG - Width	38 mm
ECG - Height	25 mm
Recommended control gear	DR DALI-P-42/220-240/1A0







Certificates & Standards


Standards	CE / CB / UKCA / EAC / TÜV SÜD / UK TP(a)
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	Not replaceable

Additional product data

Product remark	Available from April 2025
----------------	---------------------------

Accessories Optional

Product image	Product name	EAN
	DR DALI-P -42/220-240/1A0	4058075845381
	EM CONVERSION BOX TEMPERATURE SENSOR	4099854455933
	PANEL Suspension Kit	4058075402928
	PANEL RECESSED MOUNT CLIPS VAL 4x	4058075409859
	PANEL 600 RECESSED MOUNT FRAME	4058075402881
	PANEL 600 SURFACE MOUNT KIT H75	4058075472914

Product image	Product name	EAN
	PANEL 600 SURFACE MOUNT KIT H70 VAL	4058075402843









## EQUIPMENT / ACCESSORIES









- Accessories for several mounting options available
- External control gear included
- Preinstalled connector box for easy wiring and optional through-wiring
- Suitable for use with separate Emergency Conversion Box
- Separate DALI driver available

## Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- The luminaires are not suitable for covering with thermally insulated material.

## DOWNLOAD DATA

	Documents and certificates	Document name
	User instruction / safety instructions	PL COMPACT TPA
	Addon technical information	PANEL COMPACT 600
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	Safety Insert G11205013
	Legal information	PL COMP 600 TPA V 28W
	Legal information	Legal Insert G11146927
	Declarations of conformity	PL COMP 600 TPA V 28W MC 840_U19 LEDV
	Declarations of conformity UKCA	PL COMP 600 TPA V 28W MC 840_U19 LEDV


Photometric and lighting design files		Document name
	IES file (IES)	PL COMP 600 TPA V 28W 4000K U19 3360lm
	LDT file (Eulumdat)	PL COMP 600 TPA V 28W 4000K U19 3360lm
	UGR file (UGR table)	PL COMP 600 TPA V 28W 4000K U19 3360lm
	Light distribution curve type cone	PL COMP 600 TPA V 28W 4000K U19 3360lm
	Light distribution curve type polar	PL COMP 600 TPA V 28W 4000K U19 3360lm
CAD/BIM files		Document name
	BIM Revit 3D	Panel Compact
	CAD STEP 3D	PL COMP 600 TPA
Tender texts		Document name
	Tender documents	PANEL COMPACT 600 UGR19 TPA 28W 840 U19-en

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075849488	Folding box 1	622 mm x 48 mm x 602 mm	2301.00 g	17.97 dm <sup>3</sup>
4058075849495	Shipping box 4	642 mm x 211 mm x 627 mm	9934.00 g	84.93 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

**ADDITIONAL CATALOG INFORMATION**



## References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.