



PRODUCT DATASHEET

DP MAX 600 S 15W 840 VW IP69

DAMP PROOF MAX | Tubular damp-proof luminaires with extra high IP and IK protection

SUPERIOR
CLASS

Areas of application

- Food industry
- Open car parks and underpasses
- Car wash facilities
- Outdoor applications
- Industrial and storage facilities
- Workshops, assembly lines
- Passages, underpasses
- Parking garages

Product benefits

- Uniform light distribution
- Flexible application through a wide range of beam angles
- Versatile applications due to resistance to many chemicals and UV light
- Easy to clean, even at high temperatures with a high-pressure cleaner
- Energy savings up to 68 % (compared to luminaires that use fluorescent lamps)
- Low flicker ≤ 5 %

Product features

- High luminous efficacy: up to 158 lm/W
- Lifetime (L80/B50): up to 100,000 h (at 35 °C)
- Type of protection: IP67, IP69 (80 °C)
- Impact resistance: IK10
- Ammonia resistant
- UV-resistant PMMA diffuser
- Compatible to Zhaga Book 7 LED light sources




TECHNICAL DATA

Electrical data


Nominal wattage	15.00 W
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Nominal current	110.000 mA
Inrush current	41 A
Inrush current time T_{h50}	1300 μ s
Max. number of luminaires per miniature circuit breaker B16	26
Max. number of luminaires per miniature circuit breaker C10	26
Max. number of luminaires per miniature circuit breaker C16	43
Power factor λ	0.77
Total harmonic distortion	15 %
Protection class	I
Surge capability (L-N)	4 kV
Operating mode	Integrated LED driver

Photometrical data

Luminous flux	2000 lm
Luminous efficacy	133 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	> 80
Standard deviation of color matching	3 sdc _m
Low flicker	Yes
Flickering metric (Pst LM)	<1
Stroboscope effect metric (SVM)	≤ 0.4
Photobiological safety group acc. to EN62778	RG1
Beam angle	133 ° x 107 °

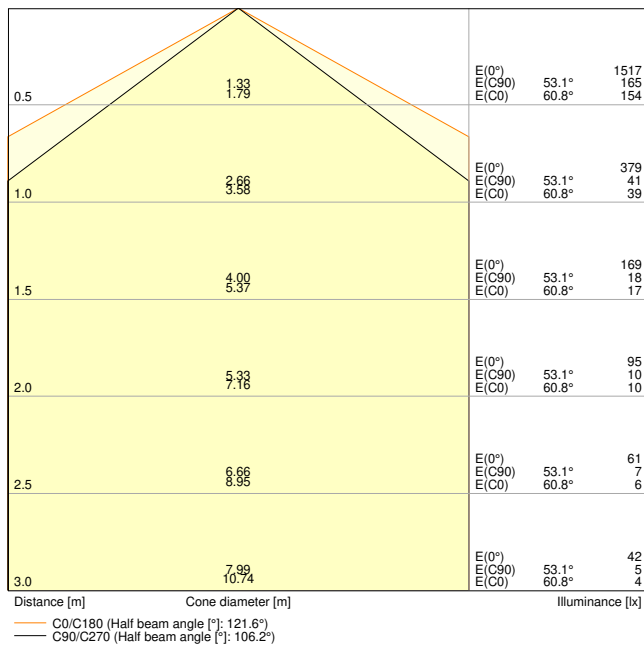

DP MAX 600 S 15W 840 IP69

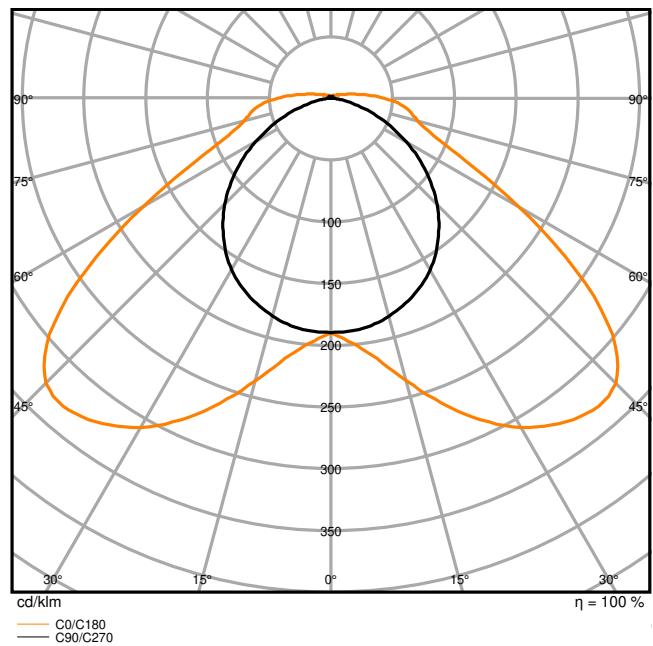

DP MAX 600 S 15W 840 IP69

Dimensions & Weight

Length	885.00 mm
Width	125.00 mm
Height	138.00 mm
Product weight	3000.00 g



Materials & Colors

Product color	Gray
Housing color	Gray
Body material	Polycarbonate (PC)
Cover material	Polycarbonate (PC)
Light emitting surface material	Polycarbonate (PC)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-25...+45 °C
Temperature range at storage	-40...+45 °C
Type of connection	Screwless terminal, 3-Pole (N, E, L)
Protection class IK (shock resistance)	IK10
Dimmable	No
Mounting type	Surface/Suspended
Mounting location	Ceiling / Wall
Application environment	Outdoor
With light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	102000 h ¹⁾
Lifespan L80/B10 at 25 °C	102000 h ¹⁾
Lifespan L80/B50 at 25 °C	102000 h
Number of switching cycles	> 200000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Recommended control gear	OT FIT 75/220-240/550 D NFC L
--------------------------	-------------------------------

Emergency lighting

Type of emergency operation test	None
----------------------------------	------

Certificates & Standards

Standards	CE / CB / ENEC / UKCA / EAC
Luminaire with limited surface temperature, "D sign"	Yes
Replaceable light source (EPREL)	Not replaceable

Additional product data

Product remark	Available from April 2025
----------------	---------------------------

Accessories Optional

Product image	Product name	EAN
	DP MAX MOUNTING BRACKET CLAMPS V4A	4099854583360
	DP MAX MOUNTING TUBE CLAMPS V4A	4099854583384












EQUIPMENT / ACCESSORIES


- Stainless steel clamps and M20 cable gland included

Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	DAMP PROOF MAX
	Legal information	Safety Insert G11205497
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	DP MAX
	Legal information	Legal insert G11231557
Photometric and lighting design files		Document name
	IES file (IES)	DP MAX 600 S 15W 840 IP69
	LDT file (Eulumdat)	DP MAX 600 S 15W 840 IP69
	UGR file (UGR table)	DP MAX 600 S 15W 840 IP69
	Light distribution curve type cone	DP MAX 600 S 15W 840 IP69
	Light distribution curve type polar	DP MAX 600 S 15W 840 IP69
CAD/BIM files		Document name
	BIM Revit 3D	DP MAX

CAD/BIM files	Document name
 CAD STEP 3D	DP MAX 600

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075849785	Shipping box 1	1,016 mm x 165 mm x 146 mm	3763.00 g	24.48 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.