

## PRODUCT DATASHEET

### LED Superstar Classic P 25 RGBW Remote Control 4.2W 827 Frosted E14

LED Retrofit RGBW lamps with remote control | Consumer LED RGBW lamps with remote control



#### Areas of application

- Domestic applications
- Outdoor use in suitable outdoor luminaires only

#### Product benefits

- Easy installation
- Lower energy consumption than incandescent or halogen lamps
- Individual control
- No app or smartphone required to control the lamp
- Comfortable and intuitive infrared remote control
- Switching, dimming in 4 steps and color control with the push of a button
- Color loops for dynamic color changes

#### Product features

- Lifetime up to 25,000 h
- Allows for control of colors, saturation and dimming levels
- Wide range of controllable light colors including white
- Four dynamic effects: Flash, Strobe, Smooth, Mode



- Dimmable via remote control

---

**TECHNICAL DATA****Electrical data**

Nominal wattage	4.2 W
Construction wattage	4.20 W
Nominal voltage	220...240 V
Operating mode	AC Mains
Claimed equiv. conventional lamp power	25 W
Nominal current	36 mA
Type of current	AC
Inrush current	3.84 A
Operating frequency	50...60 Hz
Mains frequency	50...60 Hz
Max. lamp number on MCB B10 A	125
Max. lamp number on MCB B16 A	158
Total harmonic distortion	153 %
Power factor $\lambda$	> 0.50

**Photometrical data**


Luminous flux	250 lm
Nominal useful luminous flux 90°	250 lm
Luminous efficacy	59 lm/W
Lumen main.fact.at end of nom.life time	0.96
Light color (designation)	Warm White
Color temperature	2700 K
Color rendering index Ra	80
Light color	827
Standard deviation of color matching	≤6 sdcn
Rated LLMF at 6,000 h	0.80
Flickering metric (Pst LM)	1.0
Stroboscope effect metric (SVM)	0.4

EPREL Data Spectral Diagram  
LEDr\_classic A\_B\_P\_2700K\_827

Light technical data

Beam angle	200 °
Warm-up time (60 %)	0.50 s
Starting time	< 0.5 s

Dimensions & Weight

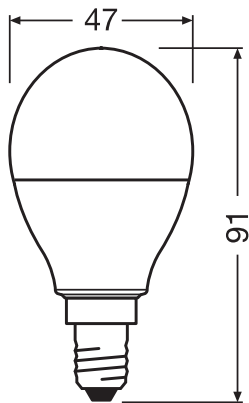

Overall length	91.00 mm
Diameter	47.00 mm
Maximum diameter	47 mm
Product weight	23.00 g

Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
Maximum temperature at tc test point	71.3 °C

Lifespan

Lifespan L70/B50 at 25 °C	25000 h
Number of switching cycles	100000
Lumen maintenance at end of service lifetime	0.96
Rated lamp survival factor at 6,000 h	≥ 0.90

Additional product data

Base (standard designation)	E14
Mercury content	0.0 mg
Mercury-free	Yes

Design / version	Frosted
Product remark	All technical parameters apply to the entire lamp / Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

## BATTERY

Battery size [GMS]	CR2025
--------------------	--------

## Capabilities

Dimmable	Yes <sup>1)</sup>
----------	-------------------

<sup>1)</sup> Check dimmer compatibility at [ledvance.com/compatibility](https://www.ledvance.com/compatibility)

## Certificates & Standards

Energy efficiency class	G <sup>1)</sup>
Energy consumption	5.00 kWh/1000h
Type of protection	IP20
Standards	CE
Photobiological safety group acc. to EN62778	RG0

<sup>1)</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)

## Country-specific categorizations

Order reference	LEDSCLP25REM 4,
-----------------	-----------------

## LOGISTICAL DATA

Temperature range at storage	-20...+80 °C
------------------------------	--------------

## Energy labelling regulation data acc EU 2019/2015


Lighting technology used	LED
Non-directional or directional	NDLS
Mains or non-mains	MLS
Light source cap-type (or other electric interface)	E14
Connected light source (CLS)	No
Color-tuneable light source	Yes
Envelope	No
High luminance light source	No
Anti-glare shield	No


Correlated colour temperature type	SINGLE_VALUE
Standby power	0.50 W
Networked standby power for CLS	0.50 W
Claim of equivalent power	Yes
Length	91.00 mm
Height	47.00 mm
Width	47.00 mm
Chromaticity coordinate x	0.463
Chromaticity coordinate y	0.420
R9 Colour rendering index	1
Beam angle correspondence	SPHERE_360
Survival factor	0.90
LED light source replaces a fluorescent light source	No
EPREL ID	523281,1338690
Model number	AC31122,AC45048,AC45048,AC45048

### Safety advice

- Do not touch the lamp if broken.
- Must not be used if outer bulb is defective.

### DOWNLOAD DATA

Documents and certificates	Document name
 Declarations of conformity	Classic lamps add value

Photometric and lighting design files	Document name
 Spectral power distribution	EPREL Data Spectral Diagram LEDr_classic A_B_P_2700K_827

### LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075430839	Folding box 1	55 mm x 53 mm x 130 mm	35.00 g	0.38 dm <sup>3</sup>
4058075430846	Shipping box 4	127 mm x 116 mm x 104 mm	260.00 g	1.53 dm <sup>3</sup>

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075445444	Shipping box 32	272 mm x 250 mm x 237 mm	2169.00 g	16.12 dm³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.