

# PRODUCT DATASHEET


## PANELS FLUSH MOUNT 1x4 40W

PANELS FLUSH MOUNT | Panel luminaire with selectable CCT, designed for flush mount applications

---

### Areas of application

- Residential areas

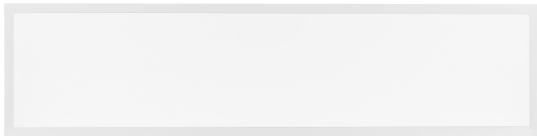

---

### Product features

- Sleek and modern design
- Surface mounting hardware included in the box. Pendant mounting sold separately
- Selectable CCT: 3000/4100/5000K via switch on the driver
- Up to 110 LPW
- Selectable wattage and lumen outputs
- 120-347V
- 115° beam angle

---

## TECHNICAL DATA

### Electrical data

Nominal wattage	40.00 W
Nominal voltage	120...347 V

### Photometrical data

Luminous flux	2200 ... 4400 lm
Luminous efficacy	110 lm/W
Color temperature	3000 ... 5000 K
Color rendering index Ra	80

### Dimensions & Weight

Length	300.00 mm
Width	1213.00 mm
Height	23.00 mm
Product weight	2500.00 g

### Materials & Colors

Product color	White
Housing color	White
Body material	Aluminum Steel
Mercury content	0.0 mg

### Application & Mounting

Dimmable	Yes
Type of dimming	PHASE CUT
Mounting type	Recessed
Application environment	Indoor
Replaceable light source	No

### Additional product data

NAED	66256
------	-------

### Accessories Optional

Product image	Product name	EAN
	MOUNT KIT PENDANT	0046135663734

---

## EQUIPMENT / ACCESSORIES


– Wall anchor screws, wire connectors, and retaining screws

---

### Safety advice

- Installs directly on a junction box via the aid of a mounting plate

### DOWNLOAD DATA

Photometric and lighting design files		Document name
	IES file (IES)	IES file Lumen and CCT Selectable LED Panel Flush Mount, 20/30/40W 2200/3300/4400 lumens 1X4

### LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
0046135662560	Unpacked 2	300 mm x 1,213 mm x 23 mm	5000.00 g	8.37 dm <sup>3</sup>
4099854393297	Shipping box 2	1,245 mm x 140 mm x 335 mm	5889.00 g	58.39 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.